



















Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name:_____		Co. Account #:_____	
below to be filled out by retailer					
Mounting Strap 1 ea 4**3**H1.5mm		Canopy 1 ea Φ115*19MM		Swivel Joint 1 ea 3/8**H57mm	
Hex Nut 2ea 3/8**H4MM		Spring Washer 2 ea 15*H3MM		Green Ground Screw 1 ea #8-32n*10mm	
Deco Nut 2 ea 5/32**9mm		Rods 3 ea Ø1/2**H12"		Rod 1 ea Ø1/2**H6"	
Glass Finial 1 ea 3/8**H8mm		Xenon Bulb 1 ea 14*13*44MM		Spacer 3 ea Ø25*H26mm	
Mounting Screw 2 ea 5/32**28mm		Junction Box Screw 2ea #8-32N*25mm		Wire Connector 3 ea P3	
Wrench 1 ea 28*60MM		Arm 2 ea 187*455mm		Socket Tool 1 ea Φ28*127MM	
Part Needed _____					
Part Needed _____					
Reason why (missing, scratched, broken glass, bent, bad finish)					
Comments _____					
Quantity _____					


FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

- Secure Arms (P) to Housing (V) by using Wrench (W), at the top and the bottom of the fixture, to attach Spring Washer (U) and Hex Nut (T). For the bottom assembly, tighten the Housing Cover (R) to Housing (V) with Finial (S). For the top assembly, tighten Housing Cover (R) to Housing (V) with Check Ring (X).
- For adjusting the hanging height of the fixture, this carton contains quantity 3, 12" rods and quantity 1, 6" rod. First, decide the height required and thread the wires through Rods (H). Then connect Rods (H) and Threaded Rod Nipples (I) together. Pull the fixture wires until taut.
- Connect the assembled Rods (H) to Fixture Frame (J).
- Connect Threaded Rod Nipple (I) to Swivel Joint (G).

DO NOT EXCEED THE MAXIMUM WATTAGE RATING

For Customer Service, contact the place of purchase to arrange for replacement parts.

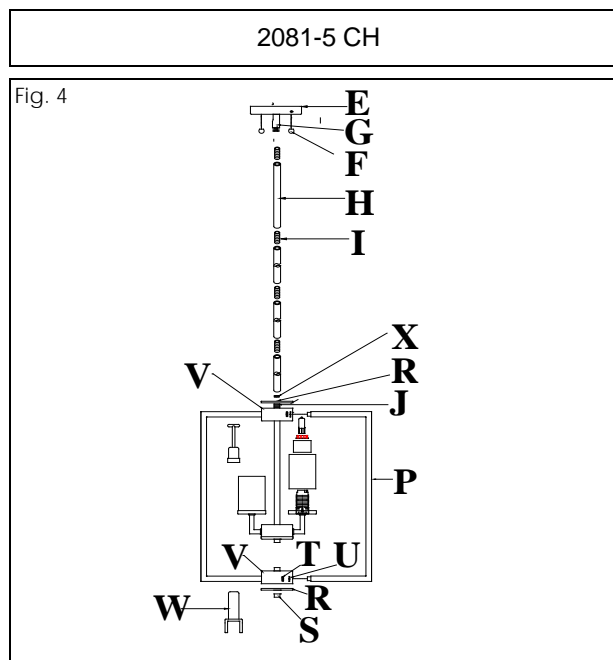

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustrations and the Parts and Assembly Sheet.
2. Shut off power at the circuit breaker and completely remove the old fixture from ceiling, including the old mounting strap.
3. Space the the two fixture Mounting Screws (A) the same distance apart as the holes in the Canopy (E) and thread the two fixture Mounting Screws (A) into Mounting Strap (B). Secure in place using Hex Nuts (D).
4. Attached Mounting Strap (B) to the Junction Box using the two Mounting Screws (C).

CONNECTING THE WIRES (Fig.2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION

8. Place Canopy (E) over Mounting Strap (B) and over the Mounting Screws (A). Adjust Canopy (E) until the Mounting Screws (C) protrude through Canopy (E) and secure the fixture against ceiling by threading Deco Nut (F) until tight.

Securing the Glass Panels (Fig. 3)

10. Slide Glass Shade (N), Spacer (M) over Socket (O) and secure Glass Shades (N), and Spacer (M) by using Socket Tool (Q) to thread Socket Ring (L) onto Socket (H) until tight.
11. Install Light Bulbs (K) in accordance with the fixture's specifications.

YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX
AND TEST THE FIXTURE.

Fig. 1

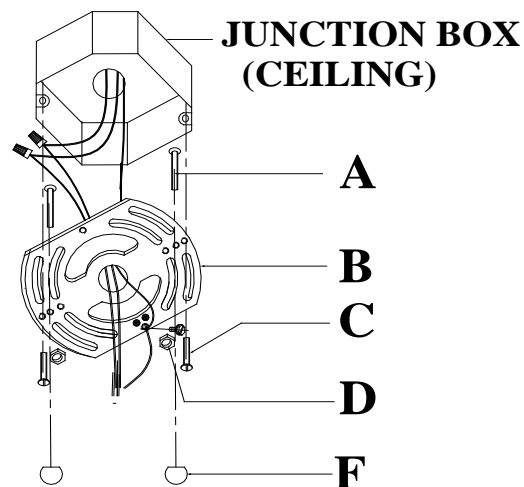


Fig. 2


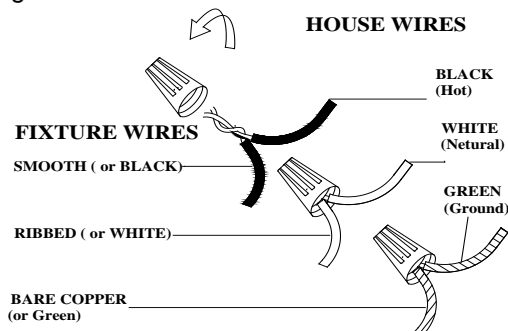


Fig. 3

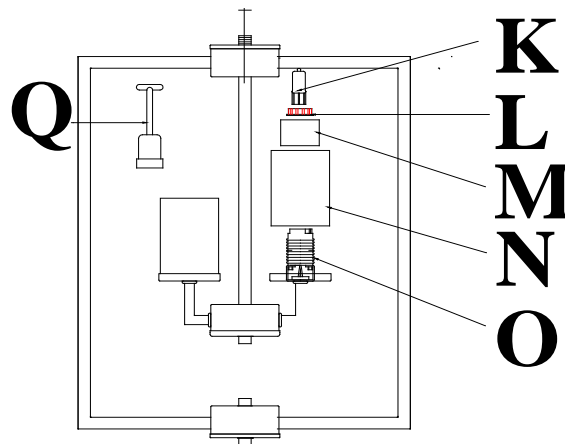

For Customer Service, contact the place of purchase to arrange for replacement parts.