



## 32 170 Single Spray Pull-Out

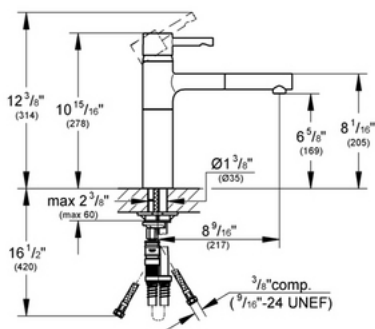

### Description

GROHE SilkMove®; Ceramic Cartridge  
 SpeedClean®; Anti-Lime System  
 Stainless Steel Braided Flexible Supplies  
 Quick Installation System  
 Single Lever Handle  
 8 9/16" Spout Reach

### Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi  
 (9.5 lpm)

### Code Compliance

ASME/ANSI A112.18.1M  
 ADA Compliant

### Finish Options

32 170 OOO Starlight® Chrome  
 32 170 DCO SuperSteel