

Company name: Created by: Phone: Fax: -

Position	Count	Description		Unit price
	1	UPS 26-99 BFC		On
				request

Date:



Product photo could vary from the actual product

Product No.: 52722518

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump is characterized by:

- \* Ceramic shaft and radial bearings.
- \* Carbon axial bearing.
- \* Stainless steel rotor can and bearing plate.
- \* Corrosion-resistant impeller, Composite, PES.
- \* Bronzepump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Liquid temperature range: 35.6 .. 230 °F

Technical:

Approvals on nameplate: UL, CSA

Materials:

Impeller:

Pump housing: Bronze

DIN W.-Nr. 2.1176.01 Composite, PES

Installation:

Maximum ambient temperature: 104 °F
Ambient max at 176°F liquid: 176 °F
Maximum operating pressure: 145 psi
Flange standard: USA Oval
Type of connection: Bronze Flange
Pipe connection: 2 - Bolt Flange

Pressure stage: 10
Port-to-port length: 6 1/2 in

Electrical data:

Number of poles: 2
Power input in speed 1: 150 W
Power input in speed 2: 179 W



Company name: Created by: Phone: Fax: Date: -

Date: -					
Position	Count	Description		Unit price	
		Max. power input: Rated power - P2: Main frequency: Rated voltage: Current in speed 1: Current in speed 2: Current in speed 3: Capacitor size - run: Insulation class (IEC 85):	197 W 0.161 HP 60 Hz 1 x 115 V 1.3 A 1.5 A 1.8 A 20 μF/180 V F		
			·		
		Others: Gross weight:	10.3 lb		




Company name: -

Created by: Phone:

Fax: Date:

## 52722518 UPS 26-99 BFC 60 Hz

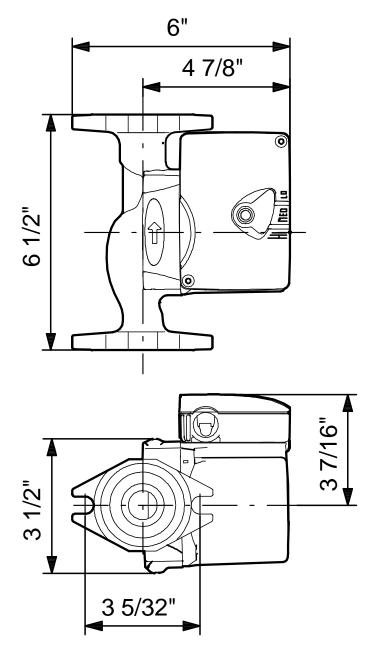

Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.