



Drawing 1 - Arm Spacing

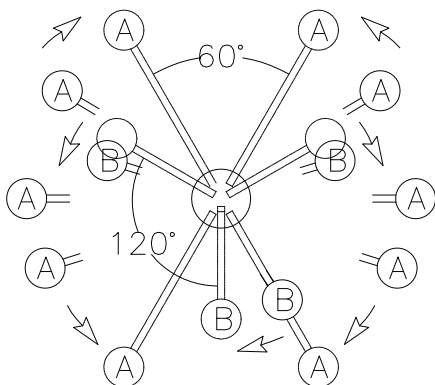

Drawing 1 - Fixture Assembly

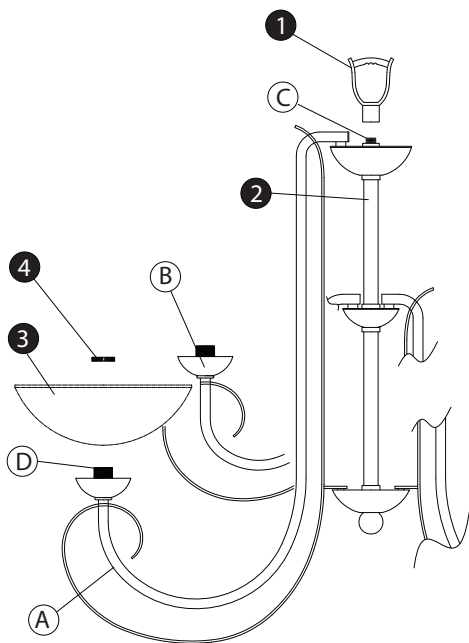

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

*** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Rotate arms (A) until they are approximately 60 degrees apart - see Drawing 1.
2. Rotate arms (B) of top tier until they are 120 degrees apart and equally spaced between arms (A) of lower tier.
2. Slip loop (1) along wire and thread onto tube (C) at top of center column (2).
3. Please refer to hanging instruction sheet (I.S. 19) provided to hang this fixture. Then refer back to this sheet to install glass.

3

1. To install glass remove socket ring (4) from socket (D).
2. Slip glass (3) over socket (D).
3. Thread socket ring (4) onto socket (D) and tighten to secure glass.
4. Fixture can be lamped accordingly.
5. Fixture is complete.

Note: Maximum wattage for 3768 fixture is 60 watts per bulb.

12.10.09