



Family: Casa | Item No. 4311 OL



▼ start here


Drawing 1 - Strap Detail

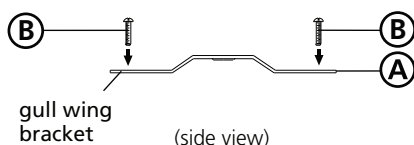

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

Drawing 2 - Fixture Mounting

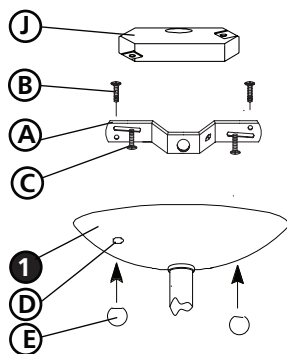


2

***** The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

1. Prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the ceiling pan (1) - see **Drawings 1 and 2**.
2. Mount gem strap (A) to junction box (J), using the two 1" screws (C).

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Drawing 3 - Glass Installation

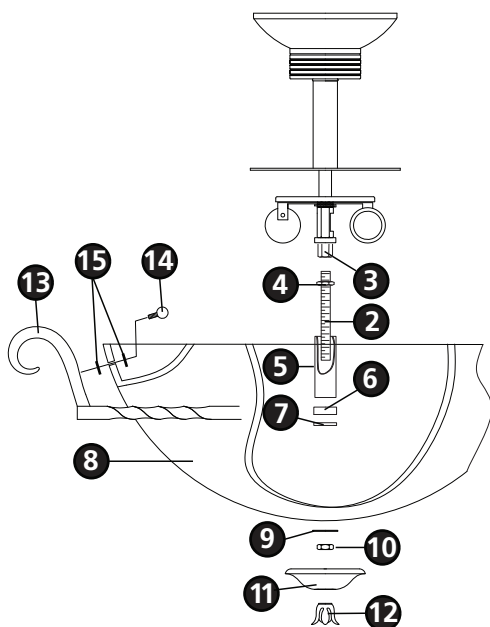

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. Hang the fixture by slipping the mounting holes (D) in the canopy over screws (B), mounted in strap (A) previously - see **Drawing 2**.
2. Thread ball knobs (E) onto end of screw (C) and tighten to secure fixture.

5

1. Prior to installing glass (8) attach ring (13) using ball knob studs (14). Line up holes in glass with holes on inside of ring and thread in ball knob studs to secure ring. Making sure to place a plastic washer (15) on each side of the glass.
2. To install glass, thread center stem (2) into coupling (3) approximately 3/8" - see **Drawing 3**.
3. Thread hex nut (4) up against coupler (3) to secure center stem (2).
4. Slip tube (5) followed by cap (6) and rubber washer (7) over center stem (2).
5. Fixture can now be lamped accordingly.
6. Slip glass (8) followed by flat washer (9) onto center stem (2) and hold in position.
7. Thread hex nut (10) on center stem (2) to secure glass (8).
8. Slip cap (11) onto center stem and hold in position.
9. Thread knob (12) onto end of center stem (2) and tighten.

Note: Maximum wattage for 4311 fixture is 100 watts per bulb.

10.28.10