




Family: Cooper | Item No. 4684



Drawing 1 - Fixture Assembly



Drawing 2 - Fixture Assembly

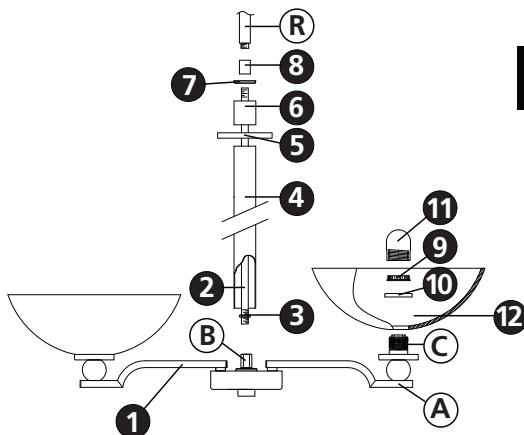

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body, hanging the fixture, and then installing the fixture glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble main body (1), spread arms (A) until they are equally spaced 90 degrees - see **Drawing 1**.
2. Slip center stem (2) along the wire and thread into coupler (B) approximately 3/8". Thread hex nut (3) down and tighten against coupler (B) to lock center stem (2) in position - see **Drawing 2**.
3. Slip center tube (4) over center stem (2) followed by decorative disc (5).
4. Slip top column (6) along wire and place on disc (5) followed by top cap (7).
5. Slip coupler (8) along wire and thread onto end of center stem (2) and tighten to complete column assembly.
6. It is now necessary to determine the total length of rods (R) you will require to hang your fixture at the desired height. Fixture is supplied with a 4", 6", 12" and 24" rod.
7. After determining the rod lengths needed, slip them along the wire and thread the first rod into coupler (A). All subsequent rods (R) thread into each other.
8. Please refer to hanging instruction sheet (I.S. 19-81) provided to hang this fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (9) and spacer (10) from socket (C).
2. Slip glass (12) over socket (C), followed by spacer (10).
3. Thread socket ring (9) onto socket (C) to secure glass (12).
4. Fixture can now be lamped accordingly.
5. Thread bulb shield (11) onto socket (C).

Note: Maximum wattage for 4684 fixture is 60 watts per bulb.

10.15.10