




Family: Brantley | Item No. 4631 TB



**Drawing 1 - Fixture Mounting**

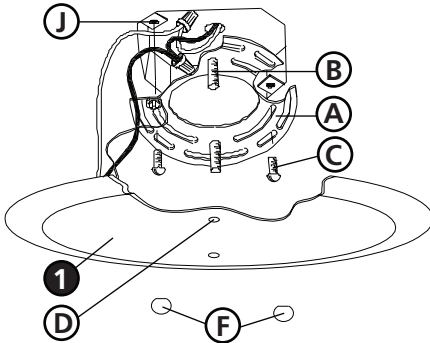

**Drawing 2 - Glass Installation**

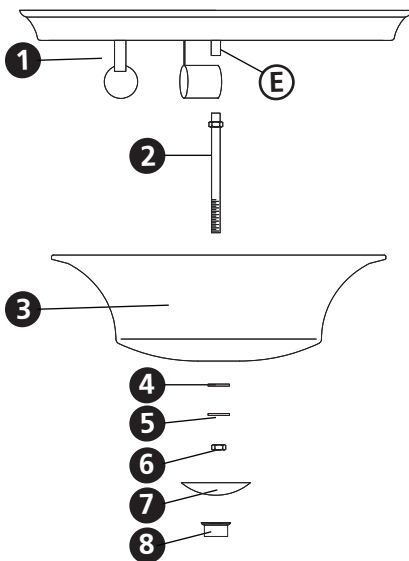

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, making all necessary electrical connections, mounting the fixture to the ceiling, and then installing the glass.**

**2**

1. Prepare mounting disc (A) by threading two screws (B) provided into the back of the mounting strap (A) - see **Drawing 1**.
  - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the canopy (1).
2. Attach mounting disc (A) to junction box (J) using two 1" screws (C) provided.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Hang the fixture by slipping the holes (D) in the ceiling pan (1) over the screws (B) in the mounting disc (A) - see **Drawing 1**.
2. Thread on ball knobs (F) to secure fixture to ceiling.

**5**

1. Prior to installing the glass, fixture can be lamped accordingly.
2. Thread center stem (2) into nipple (E) - see **Drawing 2**.
3. To install glass, slip glass (3) onto center stem (2) and hold in position.
4. Slip rubber washer (4) onto center stem (2) followed by metal washer (5) and hold in position.
5. Thread hex nut (6) onto center stem (2) and tighten up against glass (3).  
Note: Hand tighten only. Over tightening could cause glass damage.
6. Slip cap (7) and thread finial (8) onto center stem (2) and tighten.  
Note: Hand tighten only. Over tightening could cause glass damage.

Note: Maximum wattage for 4631 fixture is 60 watts per bulb.

9.16.09