


Family: Veranda | Item No. 4899 SU



Drawing 1 - Fixture Assembly

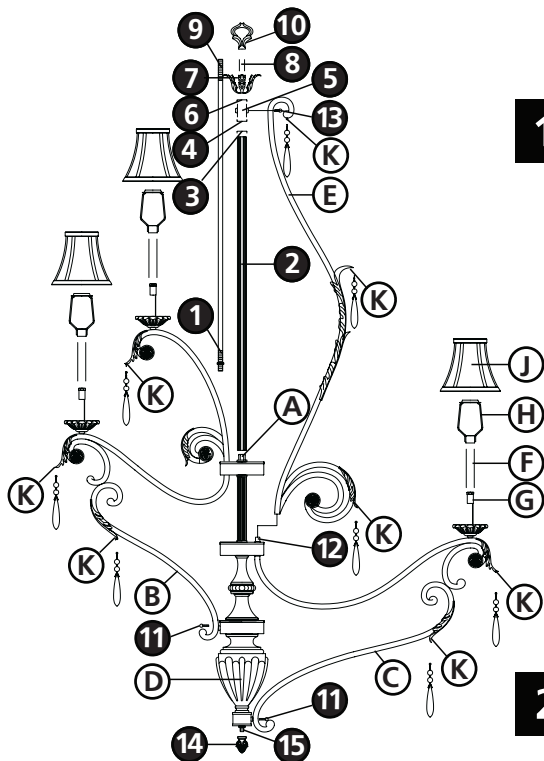

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first partially assembling the main body of the fixture, installing the required mounting braces, mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling and then completing the assembly of the main fixture.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. Thread nipple (1) with hex nut into coupling (A).
2. Slide center tube (2), followed by check ring (3), check ring (4), tube (5), check ring (6), leaf (7) and tube (8) over nipple (9).
3. Thread loop (10) onto nipple (9) and tighten to secure.
4. Adjust lower arms (B & C) to their desired positions, then secure by threading ball knob screw (11) into lower housing (D).
5. Install upper arm (E) by placing onto pin (12), then secure by threading ball knob screw (13) into tube (5).
6. Thread finial (14) onto nipple (15).
7. Please refer to **I.S. 19-50** to properly hang fixture from ceiling and continue installation of this fixture. This fixture is over 50 lbs when fully assembled. In order to be U.L. compliant, additional support in the ceiling is required.

3

1. Slip candle sleeve (F) over the socket (G) - see **Drawing 1**.
2. Slide harp (H) and fabric shade (J) onto socket (G).
3. Attach crystal pendaloues (K) at points noted.
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4899 fixture is 40 watts per bulb.

2.20.09