




## Drawing 1 - Fixture Assembly

# ▼ start here

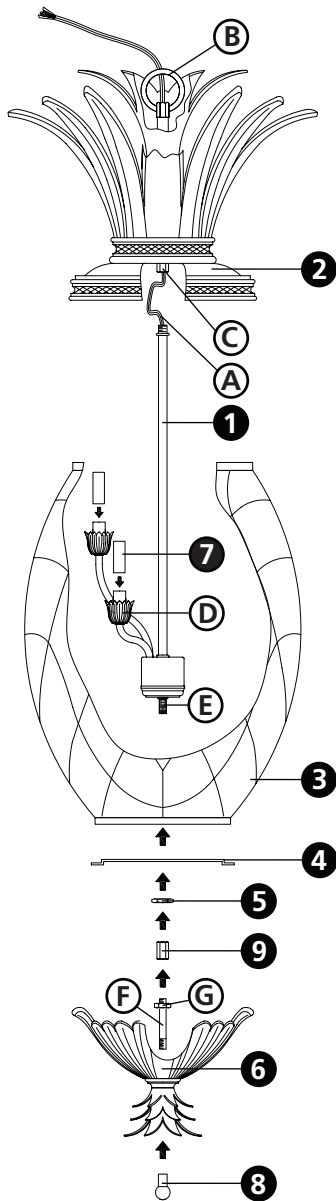

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the fixture glass, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Slip wire (A) through center tube (B) of roof assembly (2).
2. Thread stem assembly (1) into coupler (C) of roof assembly (2) and tighten.
3. Slip candle sleeve (7) over socket (D).
4. Slip glass (3) over stem assembly (1) and into roof assembly (2).
5. While holding glass (3), slip ring (4) over nipple (E) on bottom of stem assembly (1).
6. Thread nut (5) onto nipple (E) and carefully tighten nut (5) to ring (4).  
Note: Over tightening may cause damage to glass.
7. Thread coupler (9) onto end of nipple (E).
8. Thread nipple (F) into bottom of coupler (9) approximately 3/8".
9. Use nut (G) to lock nipple (E) in place by tightening nut (G) against coupler (9).
10. Slip bottom cast assembly (6) into nipple (F).
11. Thread finial (8) onto nipple (F).
12. Please refer to the hanging instruction sheet (I.S. 19-50) provided to complete installation of this fixture.

Note: Maximum wattage for 4882 fixture is 40 watts per bulb.

5.30.08