


Family: Dwell | Item No. 1322 BK




▼ start here


Drawing 1 - Strap Detail



Drawing 2 - Fixture Mounting



Drawing 3 - Glass Installation

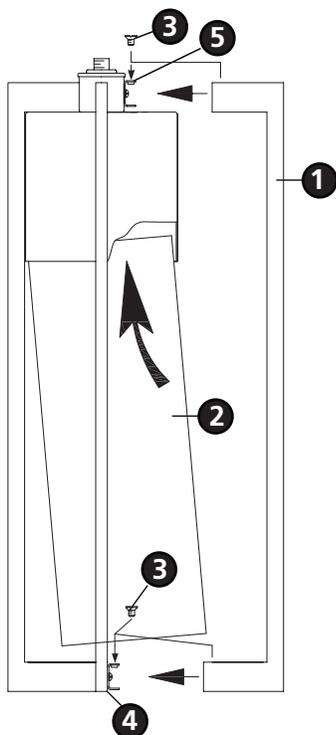

***** The construction of this fixture will be accomplished by first assembling the main body, determining the length of stem required, installing the mounting hardware, making all necessary electrical connections, and then hanging the fixture.**

1

1. One upright (1) is removable to facilitate installation or replacement of the glass and lamping of the fixture - see **Drawing 3**.
2. Remove screws (3) from top of fixture and pull upright (1) off fixture.
3. Fixture can now be lamped accordingly.
4. Tilt glass (2) and slip up into top of fixture, lift glass (2) over center hub (4) and set on uprights (1).
5. Slide upright (1) back onto the fixture, over the brackets (5), lining up holes in upright (1) with holes in brackets (5).
6. Thread top screw (3) into top of bracket (5).
7. Lift glass (2) up and using a short screw driver, thread screw (3) into bracket (5) to secure lower portion of upright.

2

1. Determine the overall length you will need the assembled fixture to be.
2. Determine what stems will be needed to achieve the overall length you require. (Additional stems are available and can be ordered. Ask your local Hinkley Lighting representative or visit www.hinkleylighting.com for information.)
3. Install stems by slipping them onto the supply wire of the fixture, threaded end up, and threading them together.

3

1. Install screws (A) into mounting plate (B) - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the canopy (E) - see **Drawings 1 and 2**.
2. Attach mounting plate (B) to junction box (J), using screws (G) provided and then slip supply wires through large center hole.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. Hang the fixture by slipping canopy (D) over screws (B) in the mounting strap - see **Drawing 2**.
2. Thread on ball knobs (E) onto the end of screws (B) and tighten to secure fixture to ceiling.

Note: Maximum wattage for 1322 fixture is 100 watts per bulb.

11.15.09