




Drawing 1 - Fixture Assembly

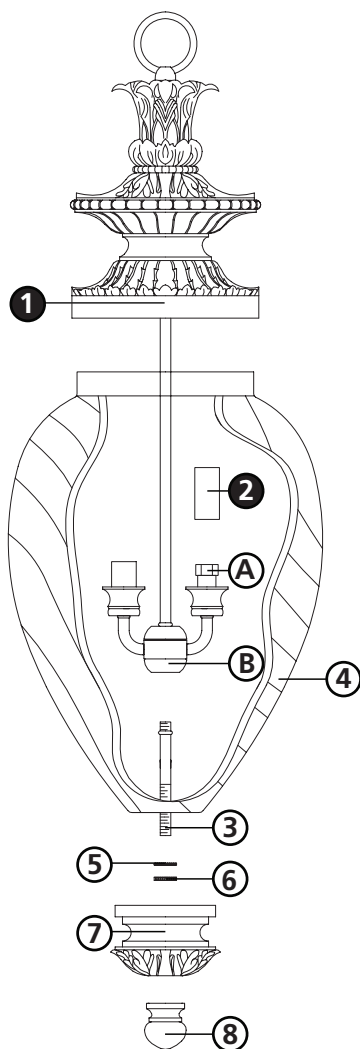

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware to the junction box, making all necessary electrical connections, hanging the fixture and then installing the fixture glass.**

2

1. Slip candle sleeve (2) over socket (A) located on main body assembly (1).
2. Thread center stem (3) into bottom of socket assembly (B).
3. Please refer to the hanging instruction sheet (I.S. 19) provided to continue installation of this fixture. Then refer back to this sheet to install glass.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. Fixture can now be lamped accordingly.
2. Slip glass (4) over socket assembly (B) and onto center stem (3), and hold in position.
3. Slip rubber washer (5) onto center stem (3).
4. Thread knurl nut (6) onto center stem (3) and tighten to secure glass (4).
5. Slip decorative finial (7) onto center stem (3) and hold in position.
6. Thread ball knob (8) onto end of center stem (3) to secure finial (7).

Note: Maximum wattage for 1732 fixture is 60 watts per bulb.

3.2.09