

QUARTZ FLOODS

Q SERIES

Cat. #		Approvals
Job	Type	



APPLICATIONS

- General and accent flood lighting where short burning hours are planned.
Instant on/off

SPECIFICATIONS


- 150 to 500 watt capability
- Die cast aluminum construction for long life
- Single screw door closure for easy installation
- Tempered glass lens protects lamp
- 1/2" cast swivel knuckle fits standard boxes and covers
- Wide, uniform beam for even illumination
- 120 volt lamps are included
- Units offered in dark bronze or white powder paint finish

LISTINGS


- Listed to UL1598 for use in wet locations



Q150X

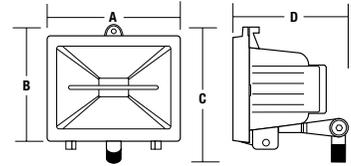

Q500X/Q300X

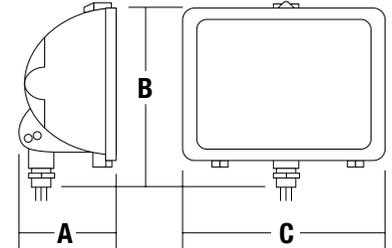

	A	B	C	D
Q150X	57/16" 138 mm	37/8" 98 mm	51/2" 139 mm	4" 100 mm
Q500X/Q300X	35/8" 92 mm	723/32" 196 mm	813/16" 227 mm	

ORDERING INFORMATION

Catalog Number	Wattage/Voltage	Color	Photometry NEMA/IES H° x V°	Weight lbs. (kg)	EPA ft ² (m ²)
Lamp Included					
Q-150-B	150w/120V	Bronze	6(124°) x 6(124°)	1.4 (0.6)	.14 (.01)
Q-150-W	150w/120V	White	6(124°) x 6(124°)	1.4 (0.6)	.14 (.01)
Q-300-B	300w/120V	Bronze	6(109°) x 4(66°)	2.6 (1.2)	.6 (.05)
Q-300-W	300w/120V	White	6(109°) x 4(66°)	2.6 (1.2)	.6 (.05)
Q-500-B	500w/120V	Bronze	6(100°) x 5(86°)	2.6 (1.2)	.6 (.05)
Q-500-W	500w/120V	White	6(100°) x 5(86°)	2.6 (1.2)	.6 (.05)

PHOTOMETRIC REPORTS

Catalog Number	Report #
Q150X	HP06551A
Q500X	HP10062.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbelloutdoor.com