Imperial

Kitchen Ventilation

The Island Slim Line The power you need. The quiet you want!





Features

- ◆ Lighting: Lighting uses 50 Watt Halogen Spots (PAR20). (Bulbs NOT Included) *Recessed lighting NOT available on 30" models or SD4 model.
- ♦ Heat Sensor: Fire Safety Thermostat with Automatic turn ON when temp. reaches 130 degrees.
- ♦ **Filters:** Aluminum Mesh Filters.
- Stacks: Made to your specifications. See reverse side for stack calculations.
- Custom: Custom sizes available. Call with exact dimensions for pricing and delivery time.
- Rails: Decorative Rails Available.
- ♦ Optional Remote Controls: Remote control wiring available on select models.

Specifications

- Power: "Air-Ring" Fan and Flame Retardant Centrifugal Blowers. 430 to 1425 CFM.
- ♦ Stainless Steel: Complete Stainless Steel Construction for Durability and Fire Safety.
- Finishes: Standard: Stainless Steel, White or Black powder coat available. Optional: Over 60 custom colors available.
- ♦ **Distance Codes:** Check local city, county and cooking appliance specifications. UL tested for 36" above cooking surface.
- Installation: Includes wood mounting frame and duct cover, made to your specifications for easy installation.


Warranty

- ♦ Warranty: 7 Year, In-Home—Parts & Labor. (Best in the Industry!)
- ♦ No "Performance" Warranty when used above BBQ Style Grills, may not be satisfactory in all situations. Call to discuss.

MODELS	POWER CFM	MOTOR TYPE	CONTROLS	SONES LOW - HI	DEPTH	LIGHTS	DUCT	SIZES
IS1900PS	750	Dual Blowers	Variable	1.5 - 4.6	28-1/8"	Dual	Single 7"	30", 36", 42"& 48"
IS1900PS-8	900	Dual Blowers	Variable	1.5 - 4.6	28-1/8"	Dual	Single 8"	30", 36", 42"& 48"
IS1900BP	735	Dual Blowers	Variable	1.5 - 4.6	24-1/8"	Dual	Single 7"	30", 36", 42"& 48"
IS1900BP-8	900	Dual Blowers	Variable	1.5 - 4.6	24-1/8"	Dual	Single 8"	30", 36", 42"& 48"
IS1900PS1-TW	1270	Twin Blowers	Variable	1.5 - 4.6	28-1/8"	Dual	Two 7"	36", 42", 48", & 54"
IS1900PS1-TW-8	1425	Twin Blowers	Variable	1.5 - 4.6	28-1/8"	Dual	Two 8"	36", 42", 48", & 54"
IS1900SD4	430	Air Ring Fan	Variable	2.5 - 7.6	24-1/8"	Center Panel	Single 7"	30", 36", & 42"



Island Slim Line Specifications ~ 7" Duct

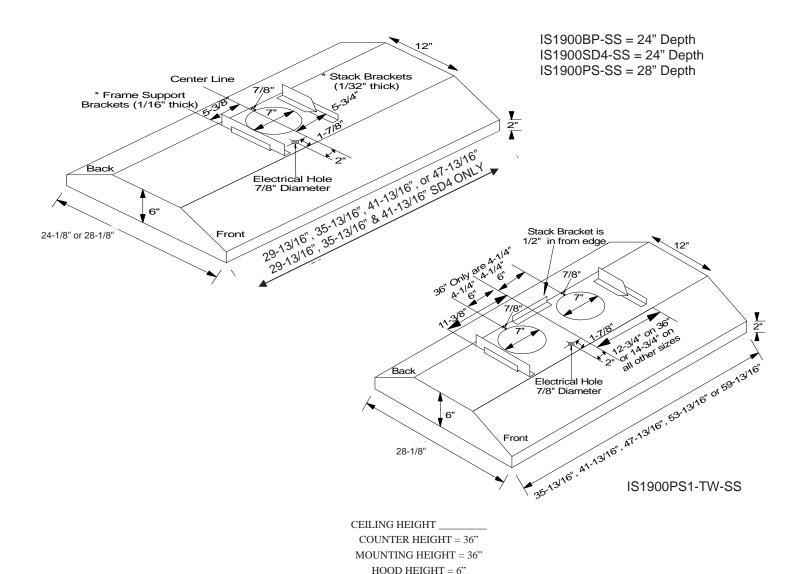

Subtract counter height and mounting height from total ceiling height, then subtract height of hood—this will give you your stack height.

Example for an 8 Foot Ceiling: 96" minus—36" minus— 36" minus— 6" = 18" high stack

<u>IS1900PS</u>, <u>IS1900BP</u> or <u>IS1900SD4</u>

Model # <u>IS-STK-(Finish</u>)-HEIGHT BL = Black, WH = White, SS = Stainless Steel 11.5" x 11.5" x HEIGHT"

IS1900PS1-TW

Model # <u>ISTW-STK-(Finish</u>)-HEIGHT BL = Black, WH = White, SS = Stainless Steel 11.5" x 23.5" x HEIGHT"

Price includes stack up to 48". Call for cost on custom sizes over 48".



