



Features

- ◆ **Lighting:** Lighting uses 50 Watt Halogen Spots (PAR20). (Bulbs NOT Included)
- ◆ **Filters:** Stainless Steel Baffle.
- ◆ ***Flange:** Trim pieces available for an additional charge.
- ◆ **Custom:** Custom sizes available. Call with exact dimensions for pricing and delivery time.
- ◆ **Optional Remote Controls:** Remote control wiring available.

Specifications


- ◆ **Power:** Air Ring Fan—400 CFM.
- ◆ **Stainless:** Complete Marine Grade 304 Stainless steel construction for Durability and Fire Safety.
- ◆ **Distance Codes:** Check local city, county and cooking appliance specifications. UL tested at 36" above cooking surface.
- ◆ **Installation:** Simple, Stress Free, One Piece Installation with **"Automatic Seal Vent Collar"**.

Warranty

- ◆ **Warranty:** 7 Year, In-Home—Parts & Labor. (Best in the Industry!)
- ◆ No "Performance" Warranty when used above BBQ Style Grills, may not be satisfactory in all situations. Call to discuss.

MODELS	POWER CFM	MOTOR TYPE	CONTROLS	SONES LOW - HI	DEPTH Front to Back	DUCT	LIGHTING	SIZES
C2000SD4B-8	400	Air-Ring Fan	Variable	2.5 - 7.6	18 1/8"	Single 8"	Front Panel	30", 36", 42", 48"
C2000SD4B-8-22	400	Air-Ring Fan	Variable	2.5 - 7.6	22 1/8"	Single 8"	Front Panel	30", 36", 42", 48"

*Flange—Custom fit your liner with standard 3/4" flanges. Other sizes available.

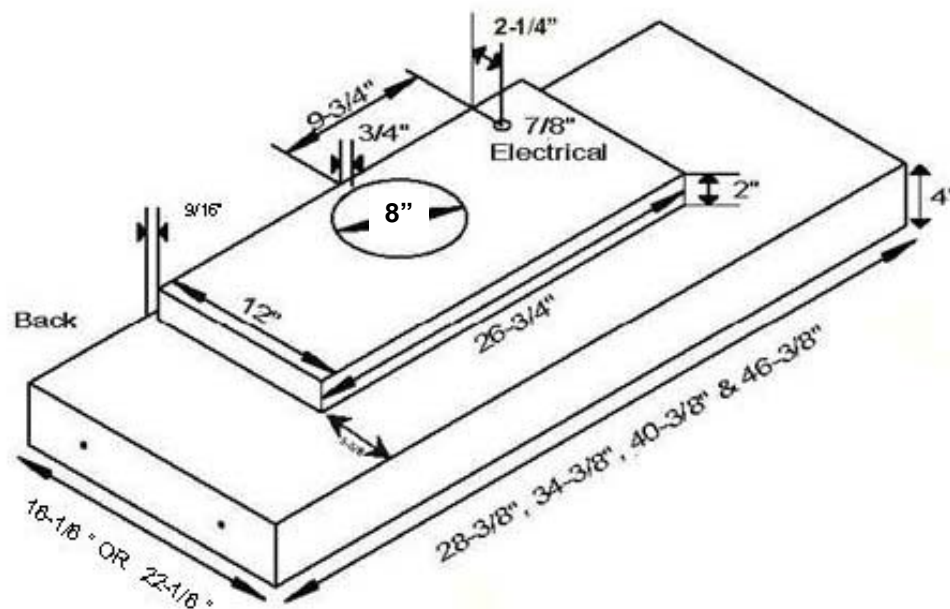

ICP does not guarantee the performance warranty over all cooking surfaces due to the variation of BTU output and cooking surfaces. The unit is designed to meet the International Builder Codes 400 CFM without make-up air required.