## TECHNICAL SPECIFICATIONS

### Luxura<sup>®</sup> 5.5 Whirlpool Bath Luxura 5.5 Whirlpool Bath Right Hand

(1676 mm) L x (864 mm) W x (508 mm) H

F946, F947: 823 lb (373 kg) / 53 lb/sq. ft. (258 kg/m<sup>2</sup>)

ELECTRICAL SPECIFICATIONS MODELS F946, F947 ONLY Requires a dedicated GFCI protected separate circuit.

F948: 798 lb (362 kg) / 51 lb/sq. ft. (250 kg/m<sup>2</sup>)

A: 15-1/4" (387 mm) B: 8-3/8" (213 mm)

LUX6634 WRL 2XX

LUX6634 WLR 2XX

# Luxura<sup>®</sup> 5.5 Bath

LUX6634 BUX XXX

**KEY DIMENSIONS** 

DRAIN/OVERFLOW

TOTAL WEIGHT

**OPERATING GALLONAGE** 58 U.S. Gal. (220 Liters) PRODUCT WEIGHT F946, F947: 90 lb (41 kg) F948: 65 lb (29 kg) SKIRT MOUNTING

Optional, U-Frame: P/N F956

RapidHeat™: P/N S750000

Motor/Pump: 120 VAC, 15 AMP, 60 Hz. RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

DIMENSIONS 66" L x 34" W x 20" H

CUTOUT

64" x 32"

Luxura 5.5 Bath (F948)

Luxura 5.5 Whirlpool Bath Left Hand

(F947)

(F946)



#### INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

#### PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## FEATURES, UPGRADES & ACCESSORIES

- Right and Left Hand Drain Location
- · Accessories / Hardware:
  - Trip-Lever Drain Kit #X559 Rotary Drain Kit, 26" Cable #8730 TheraPro Jet Trim Kit: #GU44
  - AccuPro Jet Trim Kit: #GU45
- Trim Kit Finishes Available:
  - (827) Chrome
    - (826) Brushed Nickel
    - (845) Oil Rubbed Bronze


Product Shown: Luxura 5 Whirlpool Bath Left Hand Model: F946

SIDE VIEW

HEATER (OPTIONAL) MODELS F946, F947 ONLY

Requires a dedicated GFCI protected separate circuit.

\* Measurements inside unit represent cutout in floor to allow for drain/overflow.

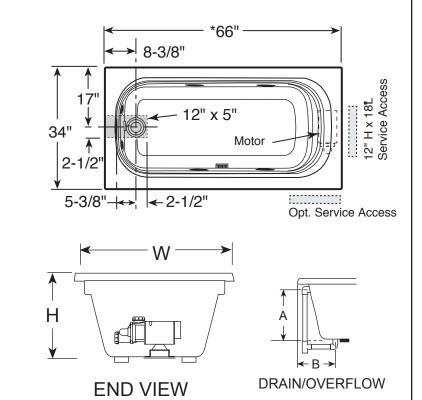

© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/technicalspecs Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work. PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.