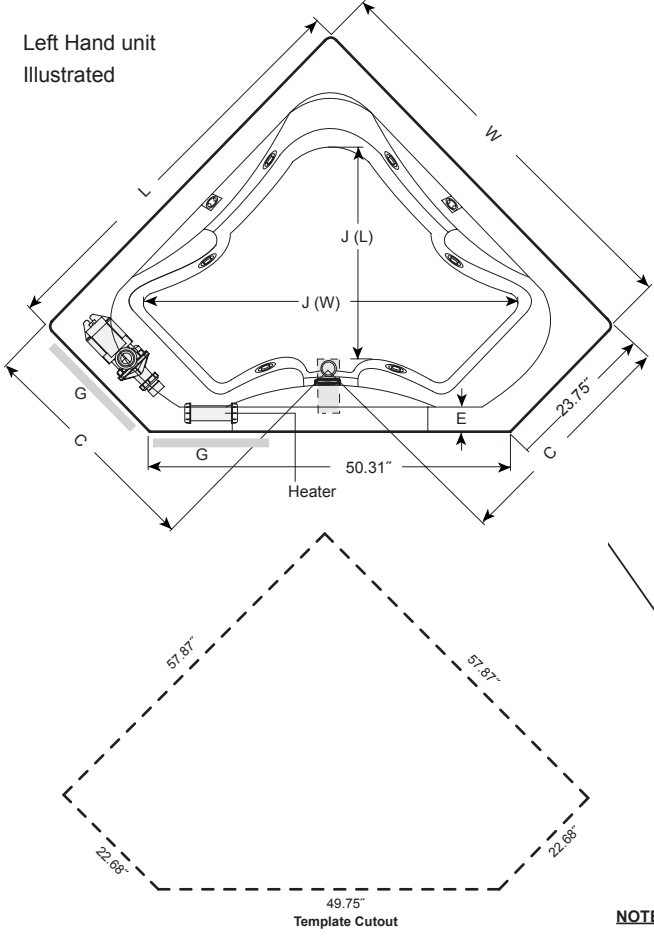


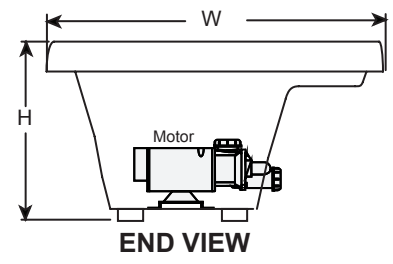
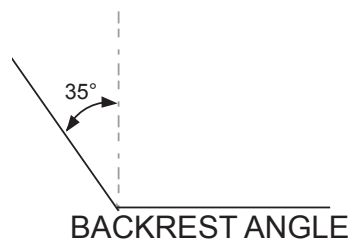
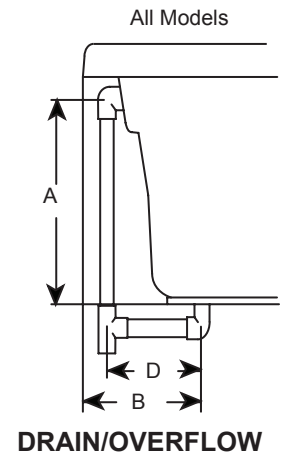
**Signature® 6060 Corner Drop-In Soaker And Whirlpool Bathtubs**

Letter	Description	SOAKER MODEL J5D6060B	WHIRLPOOL MODEL J5D6060W	WHIRLPOOL MODELS Each component requires a separate, dedicated GFCI protected circuit
-	Drain/Motor Location	Center Drain	Center Drain & LH / RH Motor	
-	Cutout	See Below	See Below	
-	Total Weight	1042 lbs (473 kg)	1057 lbs (479 kg)	
-	Floor Loading	41.7 lb/ft <sup>2</sup> (204 kg/m <sup>2</sup> )	42.3 lb/ft <sup>2</sup> (206 kg/m <sup>2</sup> )	
-	Operating Gallons (Max)	86 U.S. gallons (326 liters)	86 U.S. gallons (326 liters)	
-	Product Weight	76 lbs (34 kg)	91 lbs (41 kg)	
-	Soaking Depth	15" (381 mm)	15" (381 mm)	
L	Outer Length	60" (1524 mm)	60" (1524 mm)	
W	Outer Width	60" (1524 mm)	60" (1524 mm)	
H	Overall Height	22" (558 mm)	22" (558 mm)	
A	Overflow Height	17.38" (378 mm)	17.38" (378 mm)	
B	Long Edge to Drain Center	12.50" (318 mm)	12.50" (318 mm)	
C	Deck Edge to Drain Center	33.25" (845 mm)	33.25" (845 mm)	
D	Drain Shoe Length	6" (152 mm)	6" (152 mm)	
E	Deck Height	2" (51 mm)	2" (51 mm)	
F	Deck Width	3" (76 mm)	3" (76 mm)	
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)	12" x 18" (305 mm x 457 mm)	
I	Floor Cutout for Drain	9" x 4" (229 mm x 102 mm)	9" x 4" (229 mm x 102 mm)	
J	Interior Dimensions (bottom of bath) J(L) x J(W)	48" x 39" (1219 mm x 990 mm)	48" x 39" (1219 mm x 990 mm)	

Model with components	GFCI Outlet (60Hz)
Motor/Pump	120V 15A
Heater (if available)	120V 15A

**KEY DIMENSIONS\* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]**

**NOTE**

When ordering integral 3-tile flange (J5T), flange height on 3-tile flange is 1.25" (32mm) from deck.



**NOTE:** Drawings not to scale.