



Features:


- Cast brass spout and side valves
- Ceramic disc valve cartridge
- Flexible Hose Connections for 6"-12" installations
- Available with Cross or Lever Handles
- Speed Connect® with 1-1/4" drain
- Lead Free - Faucet contains ≤ 0.25% total lead content by weighted volume
- Maximum Flow Rate: 1.5 GPM (5.7L/min)

Pictured: 842/803 Widespread Faucet with Lever Handles

	Handle Type	Product Number
Widespread Faucet	Cross	842/003
Widespread Faucet	Lever	842/803



Available Finishes:	Finish Code
Polished Chrome	100
Old Bronze	105
Brushed Nickel	144
Platinum Nickel	150
Antique Nickel	444

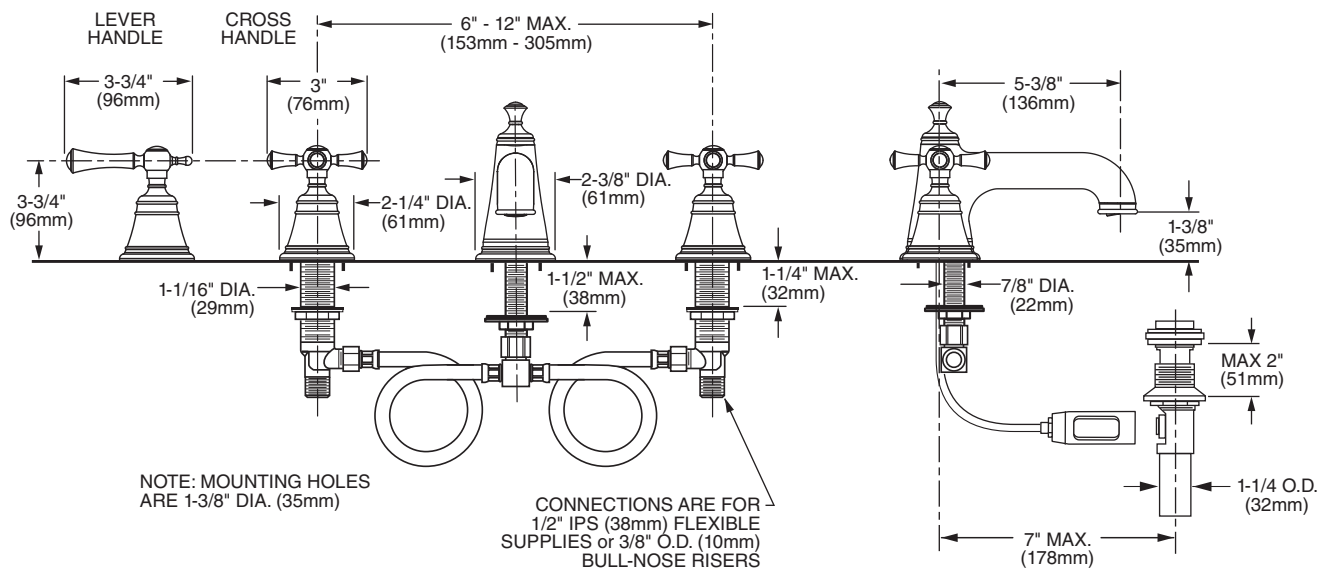

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CODES & STANDARDS

These products meet and exceed the following codes and standards:

ASME A112.18.1

CSA B125

NSF 61/Section 9 & Annex G

**EPA WaterSense® High Efficiency Lavatory
Faucet Specification**



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

