




MMG-1650-xE-xx
MINI MODULINEAR
 LOW VOLTAGE NEW CONSTRUCTION

Type	
Project	
Catalog No.	

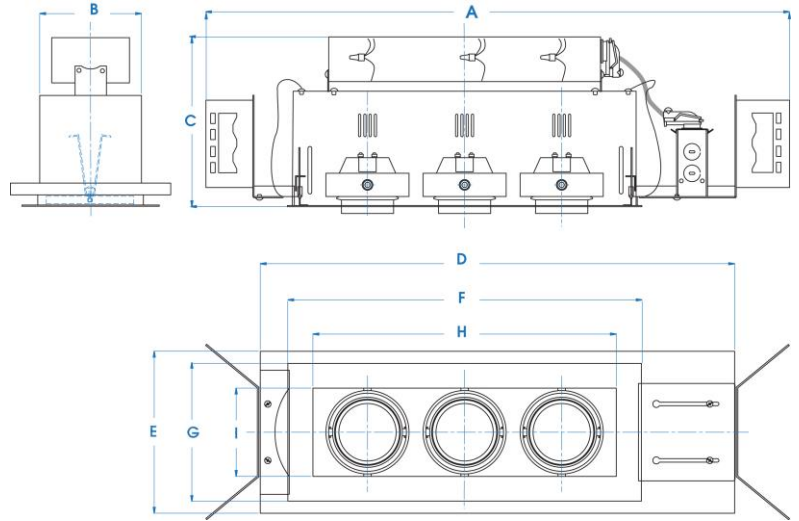

DIMENSIONS

MODEL	HOUSING			HOUSING FRAME		TRIM		APERTURE		CUT-OUT	
	A	B	C	D	E	F	G	H	I		
MMG 1650-1E	17-3/8"	3-3/8"	6"	10-1/4"	5-1/8"	5-1/2"	5-1/8"	3-3/4"	3-3/8"	4-1/8"	3-3/4"
MMG 1650-2E	20-5/8"	3-3/8"	6"	13-7/8"	5-1/8"	8-7/8"	5-1/8"	7-1/8"	3-3/8"	7-1/2"	3-3/4"
MMG 1650-3E	24-1/2"	3-3/8"	6"	17-5/8"	5-1/8"	12-5/8"	5-1/8"	10-7/8"	3-3/8"	11-1/4"	3-3/4"
MMG 1650-4E	28"	3-3/8"	6"	21-1/4"	5-1/8"	16-1/4"	5-1/8"	14-1/2"	3-3/8"	14-7/8"	3-3/4"
MMG 1650-6E	37-3/8"	3-3/8"	6"	30-5/8"	5-1/8"	23-5/8"	5-1/8"	21-7/8"	3-3/8"	22-1/4"	3-3/4"

DESCRIPTION

- New Construction recessed fixture comprised of separate housing and trim. Trim design allows use in ceilings up to 2" thick. No IC must maintain 3" clearance from any insulation on all sides.
- Built in electronic transformer.

HOUSING:

3/4" overlap flanges combined with "pull-tight" torsion springs allows forgiveness in minor dry wall cutting errors.

MOUNTING:

Designed to be installed with overlap flange trim. Universal mounting brackets allow the use of conduit, HB or FB bar stock, or "C" channel bars. Consult factory for possible use in timeless "mud-in" installations.

AIMING:

Vertical: Inner Ring 30° - Outer Ring 30°

LAMPING:

Use MR16, 12V 50W maximum. (Lamp not included).

LISTING:

UL & CUL Listed.

ORDERING INFORMATION

MODEL	LAMPING	WATTAGE	# OF LAMPS	BALLAST	FINISH
MMG	16 – MR16	50 – 50W	-1 – 1-Linear -2 – 2-Linear -3 – 3-Linear -4 – 4-Linear -6 – 6-Linear	E – Electronic	SS – Silver Trim; Silver Gimbal, Black Interior SB – Silver Trim; Black Gimbal, Black Interior AW – White Trim; White Gimbal, White Interior WB – White Trim; Black Gimbal, Black Interior

MMG	16	50		E	
-----	----	----	--	---	--



www.jescolighting.com
 support@jescolighting.com
 Tech Support: 855.592.0029

15 Harbor Park Drive
 Port Washington, NY 11050
 Main Line: 800.527.7796
 Fax Line: 855.265.5768

219 South 6th Ave
 City of Industry, CA 91746
 Main Line: 855.654.0110
 Fax Line: 626.333.2955

Rev 8
 8/7/2014

Specifications subject to change without notice.



MMG-1650-xE-xx

MINI MODULINEAR
LOW VOLTAGE NEW CONSTRUCTION

Type	
Project	
Catalog No.	

ACCESSORIES



DICHOIC LENS
LENS-16-DI-RD (Red)
LENS-16-DI-BU (Blue)
LENS-16-DI-YW (Yellow)
LENS-16-DI-GN (Green)




COLORED LENS
LENS-16-RD (Red)
LENS-16-BU (Blue)
LENS-16-YW (Yellow)
LENS-16-GN (Green)




PRISMATIC DIFFUSER
LENS-16-PRIS



SOFTENING DIFFUSER
LENS-16-SOFT




UV FILTER
LENS-16-UV




FROSTED DIFFUSER
LENS-16-FROS



LINEAR DIFFUSER
LENS-16-LINR



HONEYCOMB LOUVER
LENS-16-HCOM



C-CHANNEL HANGER BARS
RSCHB