




TM402

RECESSED LIGHTING
4" APERTURE LOW VOLTAGE TRIMS

Type	
Project	
Catalog No.	

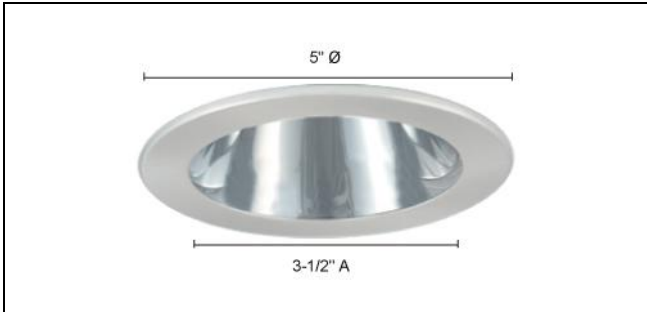

CATALOG INFORMATION

MODEL	BAFFLE / TRIM FINISH
TM402	CHBK – Chrome / Black
	CHCH – Chrome / Chrome
	CHST – Chrome / Satin Chrome
	CHWH – Chrome / White
	PBPB – Polished Brass / Polished Brass
	PBWH – Polished Brass / White
	STST – Satin Chrome / Satin Chrome
	WHWH – White / White

Ordering Instructions
Example:

MODEL	–	FINISH
TM402	–	CHCH

DESCRIPTION

- Recessed Lighting –Adjustable Open Reflector 4" aperture low voltage trim.
- Use MR16 12V 50W Max.
- Ideal for use in ceilings, cabinets and displays.
- 15° adjustment from vertical
- Dimensions: 3-1/2"A x 5"Ø
- Listings: UL and C-UL listed.

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000B
Non-IC Universal Housing for New Construction
MR16 12V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000IC
IC Housing for New Construction
MR16 12V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000R
Non-IC Housing for Remodel
MR16 12V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000BA
Non-IC Airtight Universal Housing for New Construction
MR16 12V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000ICA
IC Airtight Housing for New Construction
MR16 12V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000RA
Non-IC Airtight Housing for Remodel
MR16 12V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø