# **RLF-3808**

## 3" ROUND LED ULTRA SLIM SLIM DOWNLIGHTS WITH WHITE TRIM



Fixture Type

Project

Notes







RLF-3808-SW5-WH complete set

This Ultra Slim Recessed Downlight series is perfect for tight spaces such as soffits, insulated, and suspended ceilings. With a very wide 120° beam angle, a very high color rendering index (CRI) of 90+, this fixture can easily be installed in virtually any application where space is at a premium. At just under an inch deep, and IC rated, it can fit even directly below ceiling joists (flush to ceiling). Plug-and-Play Remote Driver is included as well as a Matte White metal trim. Suitable for Indoor Wet Locations and Triac dimming with 5-Level field-selectable Color Temperature. Optional decorative trim rings in Black and Brushed Nickel finishes available and optional universal New Construction mounting plate with hanger bars available.























## **SPECIFICATIONS**

INPUT VOLTAGE	120V AC
WATTAGE	8 W
LUMENS	500 Lm
EFFICACY	63 Lm/W
CRI	90+
BEAM ANGLE	120°
DIMMING <sup>1</sup>	TRIAC Dimming
CUT-OUT	3" Ø

Effectively dim down to 10% / See other compatible dimmers on the next page


#### **RATINGS** IC, Airtight **ENVIRONMENT** Indoor - Wet **CERTIFICATIONS** cETLus, T24 Compliant **LUMEN MAINTENANCE** 50,000 hours **INCLUDES** Remote driver and matte white metal trim **OPTIONAL** Other trims colors WARRANTY<sup>2</sup> 5 years

### **PERFORMANCE**

CCT selectable via switch on heatsink


COLOR TEMPERATURE <sup>3</sup>	LUMEN <sup>4</sup>	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) <sup>5</sup>	500 Lm	8W	63 Lm/W	90+

<sup>3 &</sup>amp; 4 CCT within +/-10%



#### ORDERING INFO


STEP 1 - Light Engine with LED, Driver and White Matte Metal Frame



## STEP 2 - Optional Trim (Sold separately)











BK - Black

BN - Brushed Nickel



<sup>&</sup>lt;sup>2</sup> See published warranty terms for detailed information

<sup>&</sup>lt;sup>5</sup> Switchable CCT

3" ROUND LED ULTRA SLIM SLIM DOWNLIGHTS WITH WHITE TRIM





Fixture Type

Project

Notes

## **TECHNICAL DRAWING**

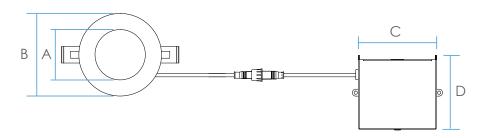





DIMENSIONS				
Α	2-1/4''	58 mm		
В	3-3/4''	95 mm		
С	3-1/2"	90 mm		
D	3-3/8''	85 mm		
Е	1" 25 mr			
F	3"	78 mm		
G	9''	230 mm		
Н	1-3/8''	34 mm		

## **COMPATIBLE DIMMERS**

COOPER	SIO6P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P

