


TaskWork LED Tape Light

24 Volt DC Damp Location Color Changing RGB

Project:

Location:

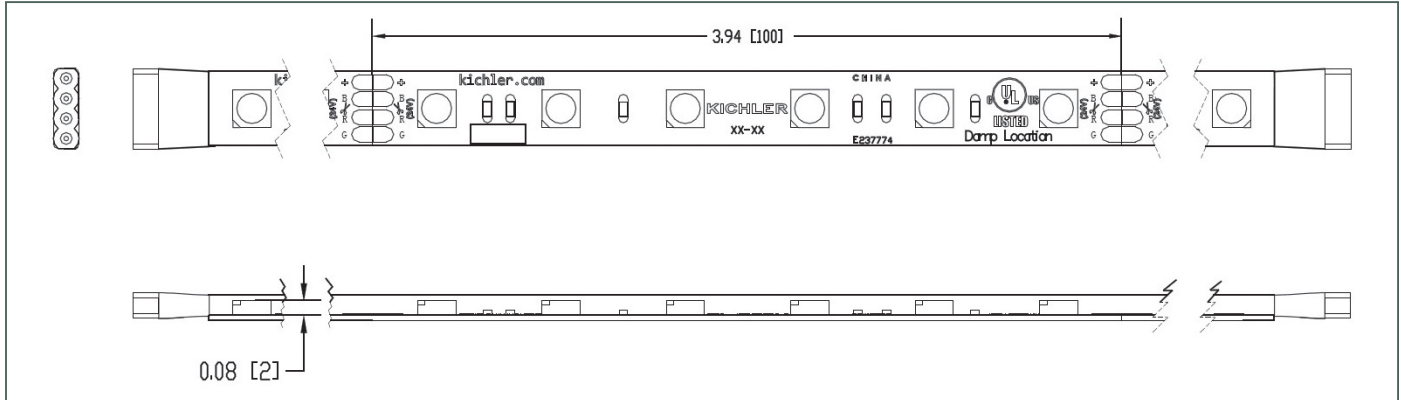

| | |
|-----------------------|--|
| Description | Professional grade 24 volt High Output LED Tape Light |
| Features | <ul style="list-style-type: none"> • Expected life 50,000 hrs at L70 • Sections can connect together end-to-end or be used individually • Tape can be cut every 4" at the end of a run • Once tape has been cut, the excess cannot be reused • 3M™/VHB professional grade adhesive backing for an easy peel-and-stick installation • Clear silicone coating for added protection against moisture and dirt • IP65 rated |
| Construction | Flexible silicone sealed. Tape is clearly marked where it is cuttable every 4". |
| Operating Voltage | 24V DC |
| CRI | N/A |
| Light Source | 6 High Powered LED per 4" section |
| Beam Angle | 120° |
| Operating Temperature | -10°C to +50°C (-30°F to +120°F) |
| Power Supply | Remote electronic Class 2 transformer. 120VAC 50/60Hz input, 24VDC output. |
| Certification | FCC compliant, UL & CUL listed. UL 2108 damp location rated, ROHS compliant, IP65 Rated |
| Warranty | 5 year warranty. See www.landscapelighting.com or www.Kichler.com for full warranty information |



TaskWork LED Tape Light

24 Volt DC Damp Location Color Changing RGB



Color Changing RGB



| | | | |
|-------------------|---|-----|--------|
| Description | High Output RGB Tape Light | | |
| Features | <ul style="list-style-type: none"> • 20' Max Run Length • 4 Watts / Ft. | | |
| RGB IP65 LED Tape | 220RGB WH, BK | 20' | (80W) |
| | 25RGB WH, BK | 5' | (20W) |
| | 21RGB WH, BK | 12" | (4W) |
| | 204RGB WH, BK | 4" | (1.3W) |

Select Accessories

| | |
|----------------|--|
| RGB Controller | <p>10199</p> <ul style="list-style-type: none"> • Must be used with RGB tape light • Touch controller • Multiple modes for unique light settings • Adjusts speed and brightness • Connects between power supply and tape light • Can only be used with electronic power supplies  |
| Track Section | <p>12330, WH, BK (10 pack)</p> <ul style="list-style-type: none"> • 3' track section • Snaps on the score every 6" • Captive screws every 6"  |

Select Power Supply Leads & Interconnect Cables



| | |
|--------------------|---|
| Power Supply Leads | <p>2SL1RGB WH, BK 12" Supply Lead</p> <p>2SL2RGB WH, BK 2' Supply Lead</p> <p>2SL8RGB WH, BK 8' Supply Lead</p> <p>2SL25RGB WH, BK 25' Supply Lead</p> <ul style="list-style-type: none"> • Connects tape light to power supply • Cannot be used as an interconnect cable  |
| Inline Splice | <p>2C1 WH, BK</p> <ul style="list-style-type: none"> • Connects two sections of tape together  |

| | |
|-----------------|---|
| 3-Way Connector | <p>2C3RGB WH, BK</p> <ul style="list-style-type: none"> • Connects 3 sections of tape together. • Ideal for making "T" or "Y" connections. • One input, two outputs. • 6.25" x 3.50"  |
| 4-Way Connector | <p>2C4RGB WH, BK</p> <ul style="list-style-type: none"> • Connects 4 sections of tape together. • One input, three outputs. • 6.25" x 6.25"  |

TaskWork LED Tape Light

24 Volt DC Damp Location Color Changing RGB


Select Power Supply Leads & Interconnect Cables, continued

| | |
|---|---|
| Interconnect Cables | 2IC02RGB WH, BK 2" Interconnect 90° |
| | <ul style="list-style-type: none"> • Used as a "jumper" wire to connect 2 sections of tape light together. • Flexible connector that is ideal for making tight turns. |
| |  |
| | 2IC12RGB WH, BK 12" Interconnect |
| | 2IC36RGB WH, BK 36" Interconnect |
| 2IC52RGB WH, BK 52" Interconnect | |
| 2IC96RGB WH, BK 96" Interconnect | |
|  | |

Select Indoor Damp Power Supply

Total wattage of tape light cannot exceed wattage rating of power supply.

| | |
|--------------------------|--|
| Direct Wire Power Supply | 10191BK60 60W |
| | <ul style="list-style-type: none"> • 9.5" L x 3" W x 1.38" H • Includes 6' cord with male DC 2.1 jack on output side • Includes push-in wire connectors on 120V input side • No minimum load requirement |
| |  |

| | |
|--------------------------|---|
| Direct Wire Power Supply | 10191BK96 96W Direct Wire Power Supply |
| | <ul style="list-style-type: none"> • 11.5" L x 3" W x 1.38" H • Includes 6' cord with male DC 2.1 jack on output side • Includes push-in wire connectors on 120V input side • No minimum load requirement |
| |  |

KICHLER LIGHTING
 World Headquarters
 7711 E. Pleasant Valley Rd.
 PO Box 318010
 Cleveland, Ohio 44131-8010
www.kichler.com

© Copyright All rights reserved
 Kichler Lighting

style to live by™

KICHLER