



LLENITA™

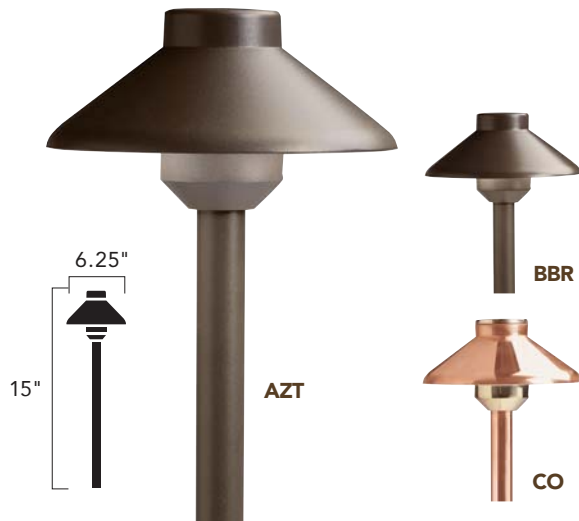

TIKI

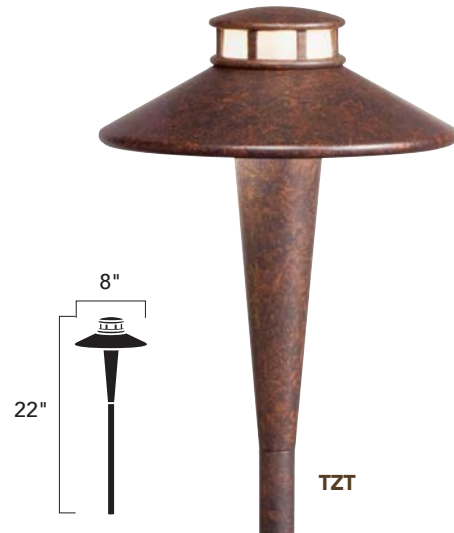

15821 AZT, BBR, BKT

15801 TZT

Kelvin	2700K – Warm White	3000K – Pure White	2700K – Warm White	3000K – Pure White																																	
Ordering Guide & Finish	15821 AZT27 15821 BBR27 15821 BKT27	15821 AZT30 15821 BBR30 15821 BKT30	15801 TZT27R	15801 TZT30R																																	
Housing	Cast Aluminum, Cast Brass, Copper (with Natural Brass Accents)		Cast Aluminum																																		
Light Source	3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver		3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver																																		
Color Temp. (CCT) & CRI	2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI		2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI																																		
Power Usage at 12V AC Input VA and Watts	3.8 W, 4.95 VA		3.8 W, 4.95 VA																																		
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology		9V-15V AC/DC with no loss in output due to constant current technology																																		
Lumen Maint.	Tested to an L-70 of 40,000 hours		Tested to an L-70 of 40,000 hours																																		
Delivered Lumens & Efficacy	2700K = 168 Lm 2700K = 46 Lm/W	3000K = 182 Lm 3000K = 49 Lm/W	2700K = 168 Lm 2700K = 48 Lm/W	3000K = 182 Lm 3000K = 49 Lm/W																																	
Wiring	30" of usable #18-2, SPT-1-W leads. Cable connectors supplied.		24" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																																		
Mounting Access. (Included)	8" slotted in-ground stake		8" slotted in-ground stake																																		
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket		15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket																																		
Incandescent	N/A		N/A																																		
Notes	Copper will naturally patina over time		N/A																																		
Fixture Photometric (fc)*	Distance from Light									Distance from Light																											
	0'	1'	2'	3'	4'	5'	6'	7'	8'	0'	1'	2'	3'	4'	5'	6'	7'	8'	Footcandles	20.70	6.60	1.00	0.28	0.10	0.06	0.01	-	-	Footcandles	5.03	2.80	1.00	0.33	0.13	0.09	0.07	0.04

*Values stated for 3000K. -10% for 2700K.