Hrs: M-F 9am to 5pm EST

KICHLER.

CAUTION - RISK OF SHOCK - Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

- Pass fixture wire and ground wire thru desired amount of stems D & E and thread together using supplied nipples. NOTE: Use a drop of Thread compound (supplied) on the
- Thread Swivel onto stems securely. Pass threaded Swivel, wire, ground wire thru hole in canopy. Place lockwasher 2) onto end of threaded nipple protruding from inside canopy. Thread hexnut onto threaded nipple protruding from inside canopy if not already completed by factory. Tighten to
- Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.

 Attach mounting strap to outlet box. Mounting strap can be 3)
- 4)


- adjusted to suit position of fixture.

 Grounding instructions: (See Illus. A or B)

 On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into
- On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in B)


mounting strap.


If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, after following the above steps. Never connect ground wire to black or white power supply wires.

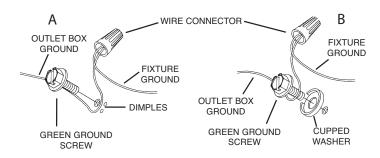



- 6) Make wire connections. Reference chart below for correct
- connections and wire accordingly.

 Push fixture to ceiling, carefully passing mounting screws through holes in canopy. Make sure all wires are inside canopy and do not get pinched between canopy and
- ceiling.
 Thread lockup knobs and lockwashers onto mounting screw 8)
- and tighten to secure fixture to ceiling.
 Place glass over socket and take the glass retainer and socket ring and thread onto the socket to secure glass in 9)
- 10) Screw light bulb (not supplied) in place.

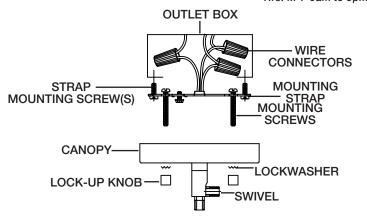





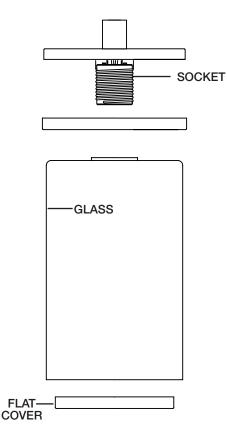



Date Issued: 06/14/16 IS-43996-US