KICHLER.



Things are looking up.

Art adorns your walls: why not your ceiling?

Your ceiling is a blank canvas. A Kichler[®] ceiling fan brings it to life. With so many options for size, style, finish, lighting effect and more, you'll discover that your Kichler ceiling fan makes any space more beautiful – and more comfortable. From open areas to cozy bedrooms, from grand living rooms to outdoor patios, there's a Kichler ceiling fan designed for you.







BY COLLECTION NAME

CONTENT OVERVIEW

06	DC vs. AC Fans	16	Symbol Guide
07	Why Choose LED	17-29	Visual Index
08	Rating Guide & Air Circulation	30	Décor Fans
10	Advanced Product Support (APS)	120	Kichler [®] Fans
12	Indoor Living	308	Accessories
14	Outdoor Living	332	Index

COLLECTIONS BY FAMILY NAME

Ahrendale [™]	170
Arkwet [™]	132
Arkwright [™]	128-131
Ashbyrn	160
Basics	298-307
Bentzen [™]	264-267
Bisc [™]	98-101
Bowen	240-245
Cadence [™]	138
Cameron [™]	140
Canfield [™]	246-263
Carlson [™]	186
Celino [™]	146
Chiara	154
Colerne [™]	
Cortez	200
Eads [™]	174-177
Ellys	142
Enduro [™]	
Eris	

™170	Ferron [™]	102-105	Pola [™]	
132	Flyy [™]		Rana [™]	
' 128-131	Geno [™]		Renew [™]	
160	Gentry		Ridley [™] II	
	Hatteras Bay [™] .		Ried	
	Hendrik [™]		Seaside [™]	
	Imari		Shuriken [™]	
	Incus [™]		Skye [™]	
	Jace [™]		Sola	
	Jade		Spyn	
	Kevlar [™]		Spyra	
	Kimberley [™]		Starkk [™]	
146	Kittery Point [™]		Stratmoor	
	Kyte [™]		Surrey	
	Lacey [™] II		Sutter Place [™]	
	Leeds [™]		Szeplo [™] II	
	Lehr [™]		Terna [™]	
	Link [™]		Terra	
	Logan [™]		Tess	
	Lucian [™]		Todo [™]	
	Lyndon [™]		Trevor [™] II	
	Maor		Uma	
	Motu [™]	272	Voya [™]	
_	Olumnia	156	Xety [™]	
Wall to	Dhroo [™]	66-69	Zenith [™]	
MUT BIGHT.			Zeus	
Page Con			2003	
Inish. 43				
. Incu				
	300 Ap			
1	C TO STILL			
	NB STATION			
	Stin NSh 4	ŵ		
	atura			
		On Stranger		
		Te Rin An		
		ISA Wildle		
		Thy G		
		*Cin	N. COL	
			The S. We	
			Bronsther	
			E BIS 44	
			Vassar [™] Voya [™] Xety [™] Zenith [™] Zeus Zeus Aguas des des des des des des des des des de	

Pola [™]	276-279
Rana [™]	126
Renew [™]	284-295
Ridley [™] II	164
Ried	42-45
Seaside [™]	194
Shuriken [™]	106-109
Skye [™]	144
Sola	148-153
Spyn	
Spyra	70-73
Starkk [™]	222-229
Stratmoor	280-283
Surrey	212
Sutter Place [™]	268-271
Szeplo [™] II	90-97
Terna [™]	110-115
Terra	236-239
Tess	230
Todo [™]	274
Trevor [™] II	158
Uma	172
Vassar [™]	214
Voya [™]	
Xety [™]	78-81
Zenith [™]	54-57
Zeus	58-61

CONNECT WITH US

9090 f

Facebook.com/Kichler.Lighting Twitter.com/KichlerLight YouTube.com/KichlerLighting Houzz.com/pro/KichlerLighting/Kichler Pinterest.com/KichlerStyle Instagram.com/KichlerLighting


To find an Authorized Dealer, visit Kichler.com.

PARTICIPACIÓN DE LA COMPACTICIÓN DE

Choosing The Right Size Ceiling Fan For Your Room

STEP ONE

Determine the square footage of your room. Measure the length and the width of the room and then multiply. For example, 12 feet long x 10 feet wide = 120 square feet.



STEP TWO

Have a tall or cathedral ceiling?

Many Kichler[®] ceiling fans work with 8 or 9 foot ceilings. If your ceiling is higher, you'll need a downrod. The rule of thumb is that fans should have a minimum of 7 feet of clearance between the bottom of the fan blades and the floor in order to circulate the air efficiently.



STEP THREE

Determine the size fan you need:

	ROOM SIZE	ROOM TYPE	BLADE SWEEP
SQ. FT. OR LESS	90 square feet or less	 Small bedroom or office Galley kitchen Outdoor applications 	15" to 42"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
<	90 to 100 square feet	 Over a kitchen table Large walk-in closet Laundry room Small screened-in porch Outdoor applications 	44" to 48"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
<	100 to 150 square feet	 Bedroom Larger kitchen Formal dining room Outdoor applications 	50" to 54"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
	150 to 300 square feet	 Great room Large outdoor patio Master suite Outdoor applications 	56" to 70" or multiple fans
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
	Over 300 square feet	 Lobbies Restaurants Large open spaces 	Over 70" or multiple fans

5

Five Reasons to Choose a Kichler® DC Motor Fan:

USES UP TO 70% LESS ELECTRICITY than Kichler[®] AC motor fans.

WHISPER QUIET OPERATION virtually eliminates noise.

EASY INSTALLATION thanks to a light-weight motor.

LIFETIME LIMITED WARRANTY on all Kichler[®] fans. Visit Kichler.com/Warrantu for details.

COOLTOUCH[™] 6-SPEED REMOTE OR WALL CONTROL comes standard with all of our Kichler® DC motor fans for full-function operation.









Why Choose Kichler[®] LED Ceiling Fans?

REPLACEABLE LIGHT SOURCE

All Kichler[®] LED light sources, whether an integrated module or lamps, are replaceable, which makes them an easy choice for a long-lasting fixture.

ENERGY EFFICIENCY

LED light sources are up to 90% more efficient than fluorescent or incandescent light sources.

TESTED & APPROVED

Kichler[®] integrated LED light sources are tested and approved to meet our rigid engineering standards and quality assurance requirements.

ENHANCED LIGHT QUALITY

Kichler[®] integrated LED light sources produce 1,600+ lumens of light, greater output than two 60W incandescent bulbs or one 100W incandescent bulb. And with a Color Rendering Index (CRI) of 80, Kichler LED light sources help you more accurately see the color and subtleties of the objects being illuminated.

LESS WATTAGE EQUALS LESS WASTE

Most Kichler[®] integrated LED modules use only 17W versus a 100W incandescent bulb, resulting in significant energy savings.



7

Ceiling Fan Rating Guide

Here's what the numbers mean to you.

Designing ceiling fans that maximize performance for our customers has always been how we do business. We proudly display a rating system for each fan we offer, so you can compare fans with confidence.

Look for this rating guide listed with every Kichler® fan.

Engineered for Optimal

Airflow is measured in Cubic Feet Per Minute (CFM) – a U.S. Government-mandated standard.

• The higher the airflow number, the more air the fan is circulating.

Designed for Minimum
POWER

USAGE

Power usage for your fan motor is measured in watts.

- The lower the watts, the less energy the fan consumes.
- DC motor ceiling fans are the most energy-efficient, using the least amount of wattage.

AIR PERFORMANCE


AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
8060	82	98

Built for Enhanced AIRFLOW EFFICIENCY

Airflow efficiency gives you the total picture: dividing the fan's CFMs by the watts of power it consumes.


• The higher the airflow efficiency number, the more air the fan is moving per watt.

Circulate Air With The Seasons



COUNTER-CLOCKWISE

When it's hot outside, set the fan to rotate counter-clockwise. The blades will push air down – creating a breeze or cooling effect on the people in the room.



CLOCKWISE

In the winter, set the fan to rotate clockwise.

The blades will pull the air up and around, moving the warm air that rises to the ceiling back down to the living space.


By changing the fan direction, you can adjust your thermostat up to $+4^{\circ}$ F when it's hot and -2° F when it's cold, which can save on energy costs.

Educational Videos

Need help? Watch our Kichler Fan Fast Facts at Kichler.com/FanFastFacts




Subscribe to our channel: YouTube.com/KichlerLighting




Blade Pitch

What is blade pitch and why is it so important for a ceiling fan? What affects airflow efficiency? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.




Location

What's the best placement of a ceiling fan? Any do's and don'ts for hanging a ceiling fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.



Sloped Ceilings

How do you hang a ceiling fan on a sloped ceiling? How steep is too steep? Is an adapter required to hang your fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.



Fans with Lights

Kichler[®] ceiling fans with lighting energize and add ambiance to any space, both in terms of style and function. So how do you pick the lighting that's right for a space? Let Kichler Fan Fast Facts help.



Outdoor Fans

Which fan is right for an outdoor space? Damp-rated fans work in high-humidity areas that won't have direct contact to rain or the elements. Wet-rated fans can handle rain and water spray, as well as direct exposure to the sun. CLIMATES[™] fans can withstand the harshest outdoor elements.



Bluetooth[®] Technology

Did you know that with a Kichler Bluetooth® speaker light kit you can turn your ceiling fan into a sound system? Get the details and see the technology in action with Kichler Fan Fast Facts.

Advanced Product Solutions (APS) & Layout Services

Free layout services-and so much more.

From answering questions to recommending the layout for multiple ceiling fans – the Kichler APS & Layout team is your link to getting the job done. This free service takes the guesswork out of what size fan you need for a space and ensures the correct controls are selected so the fan you choose communicates appropriately with the remote or other control you may be using.

Layout Design Services


Get solutions faster and remove the guesswork.


Planning a fan layout for optimal operation and ensuring the right controls are just a few of the jobs our APS & Layout team can get done for you.

Contact us at layouts@Kichler.com and we'll get you started:

- 1 Email us a completed Design Request Form (available at Kichler.com/APS) along with any drawings or pictures related to the job.
- 2 We'll create a BOM (Bill of Materials) and email it back to you that same day (for all requests received by 3 pm EST).

3 Once you confirm the BOM and pricing, we'll return a completed layout design within 48 hours or less.





Advanced Product Support

No question is too complex.

Installation issues? Building code questions? Regulatory stumper? If you've got a challenging question–we've got you covered. Our Advanced Product Support team received additional classroom and in-field training on all Kichler[®] products, so you can get your question answered quickly. To take advantage of this free service, call our dedicated Advanced Product Support line at **844-KICHLER (844-542-4537)** or email **techsupport@Kichler.com**.

Indoor | Outdoor | Fans | Landscape | Lighting Systems

DESIGN DETAILS

How you light a room is evolving. Indirect illumination and decorative fans and fixtures now commonly share functionality in a space. Under or above shelving, and even recessed into drywall – indirect lighting, first used by Frank Lloyd Wright, has re-emerged utilizing today's LED technology and brings a variety of advantages to this time-tested idea.

Zeus LED Ceiling Fan 300060WH with Silver Blades, 360000WH 12" Downrod, Tape Light 6T120H30WH with Channels 1TEK1DWRC8SIL and 1TEK1SWRC4SIL on soffit and floating shelf | Page 6

Kichler.com





Indoor Living


Add a breath of fresh air to any room.

Any size, any finish, any style... Kichler[®]'s comprehensive offering turns ceiling fans into focal points you'll love looking at in any room – even laundry rooms and master closets. We offer one of the largest collections of modern styles available, and feature some of the most unique textures you'll find including Anvil Iron, Satin Black, Weathered White Walnut, Bamboo, Brushed Nickel, Weathered Zinc, Walnut and many more.

Bring it all together.

Carry the look and the light throughout a room to create an effect you'll love for years.

Top to bottom: Weathered White Walnut ABS blade finish; Voya[®] LED Ceiling Fan 300706BSS with Asher Pendants 44102AP; Weathered Zinc fan finish. See all of our fan finishes on page 317.

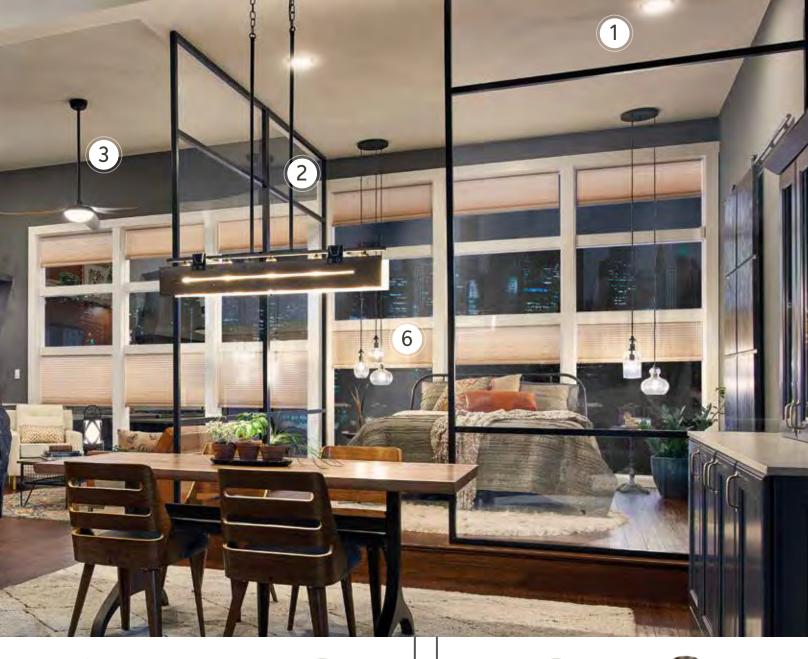



Get the ambient effect of a recessed fixture with a seamless look.

Ceiling Lights 43848WHLED27



Don't overlook countertop workspaces – under cabinet options add light without a harsh glare.

> Under Cabinet Lights 6UCSK08WHT



Add additional lighting over islands and dining tables in a way that expresses your personal style.

Ridgewood Chandelier 44180BKT Cobson Pendants 425850Z



Add small disc lights to create visual interest and highlight shelving.

Accent Discs 4D12V27BZT



Bring airflow to large or small spaces with coordinated ceiling fans.

60" Flyy[™] LED Ceiling Fan 310700OZ



Use decorative lighting in unexpected ways to add your own unique look.

Riviera 3 Light Pendants 43952OZ Kichler.com









Outdoor Living

Keep your cool outside.

Kichler[®] outdoor ceiling fans bring style and airflow to your favorite al fresco entertaining spaces. Each offers premium finishes and hardware designed to withstand the elements for years of worry-free performance. Best of all: these fans can also be used indoors – so you can carry the look inside. Be sure to choose a fan rated for your particular space. Kichler offers a range of Wet, Damp and CLIMATES[™] selections to pick from.

Bring it all together.

Bring life to your outdoor spaces after dark with the right lighting pieces.

Top to bottom: Bamboo blade finish; Kevlar[™] Ceiling Fan 310150WCP with LED Bluetooth[®] Light Kit 380950SNB; Lehr[™] II Ceiling Fan 310112DBK and 12V Deck Lights 15477CBR; Weathered Steel Powder Coat fan finish. See all of our fan finishes on page 317.





Arrange pendant fixtures in clusters – for a stylish statement and ambient light.

Argyle Outdoor Pendants 49747WZC



...or large fixtures to match your space.

LED Hardscape Lighting 6 LED 15746AZT27



Outdoor ceiling fans bring light, as well as added temperature control, to sitting areas.

Rana[™] LED Fan 60" 310155NI



A built-in Bluetooth® speaker allows you to wirelessly add music to your gatherings.

Lyndon[™] LED Portable Lantern 49500BKTLED



The right hardscape lighting helps guide your guests at night. Choose small...

LED Hardscape Lighting 1 LED 15744AZT27

SYMBOL GUIDE



DC MOTOR CEILING FANS

The ultimate in energy-efficient operation

- Use up to 70% less electricity than AC motor fans
- Have whisper-quiet operation
- Cool and efficient operation extends motor life

Energy Stat

ENERGY STAR® CEILING FANS

The trusted, government-backed symbol for energy-efficient products

- Meet strict guidelines set by the U.S. Environmental Protection Agency (EPA)
- Are 40% more efficient than conventional fan/light units
- Come with highly efficient light source options

LED LIGHT KIT CEILING FANS

Feature a long life, light source that is extremely energy efficient

- · All Kichler® LED light sources are replaceable, whether an integrated LED module or lamps
- Use up to 90% less energy than incandescent light sources and are a low-maintenance alternative
- Last up to 20 times longer than incandescent light sources
- Generate less heat than incandescent light sources

DAMP-RATED CEILING FANS

Engineered for high-humidity areas

- For enclosed porches, sunrooms, bathrooms and more
- Have water-resistant, durable finishes
- · Incorporate galvanized undercoating on all metal surfaces
- Include stainless-steel mounting hardware
- Feature all-weather ABS plastic or sealed wood blades

WET-RATED CEILING FANS

For open or direct exposure to sun, rain or water spray

- Are ideal for pergolas, lanais, open porches and more
- · Have highly durable finishes against rain and snow
- · Feature stainless-steel mounting hardware
- · Include all-weather ABS plastic blades

CLIMATES[™] CEILING FANS

Are built to withstand open exposure to the harshest outdoor elements

- · Are ideal for areas with extreme temperatures, saltwater spray and consistent UV exposure
- Have impressive corrosion and warp-resistant finishes: fan bodies and select blades crafted from all-weather ABS plastic or aluminum
- · Feature a weather-hardy aluminum support system

OUTDOOR/INDOOR CEILING FANS


This blue line shown at the top of the product page indicates ceiling fans that are Damp- or Wet-rated, but can be used indoors as well

DÉCOR[™] COLLECTION VISUAL INDEX



DÉCOR[™] COLLECTION VISUAL INDEX



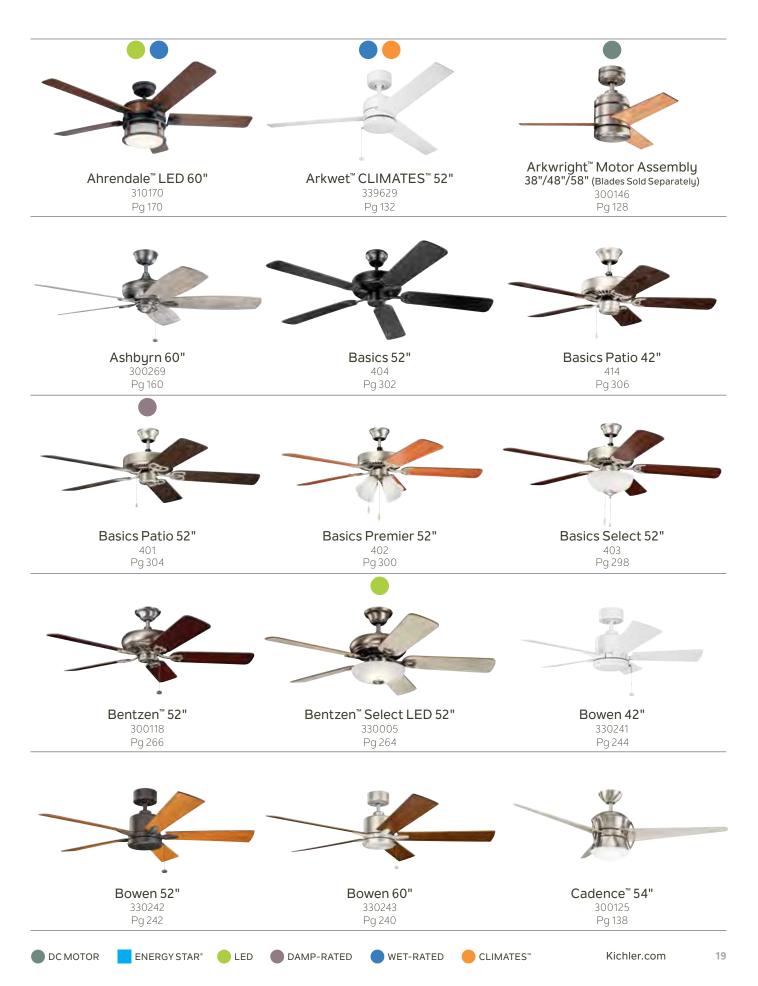













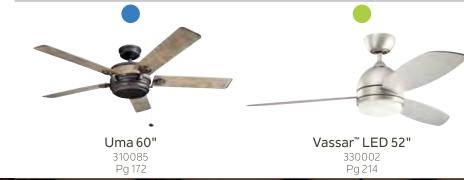


Vassar[™] LED 52" 330002 Pg 214

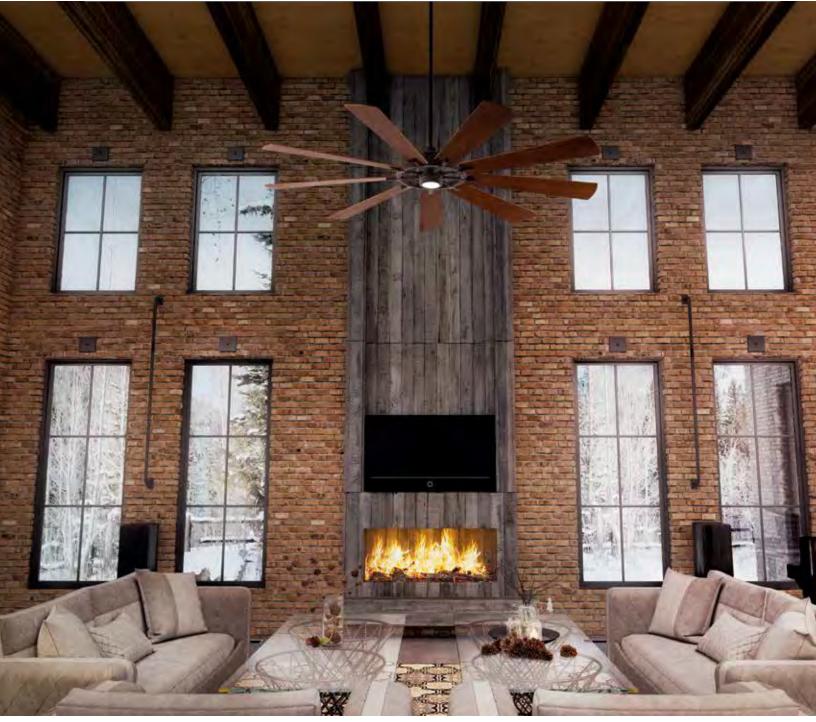

ENERGY STAR° 🛑 LED 🛑 DAMP-RATED 🛑 WET-RATED 🛑 CLIMATES[®]

OUTDOOR/INDOOR FANS VISUAL INDEX




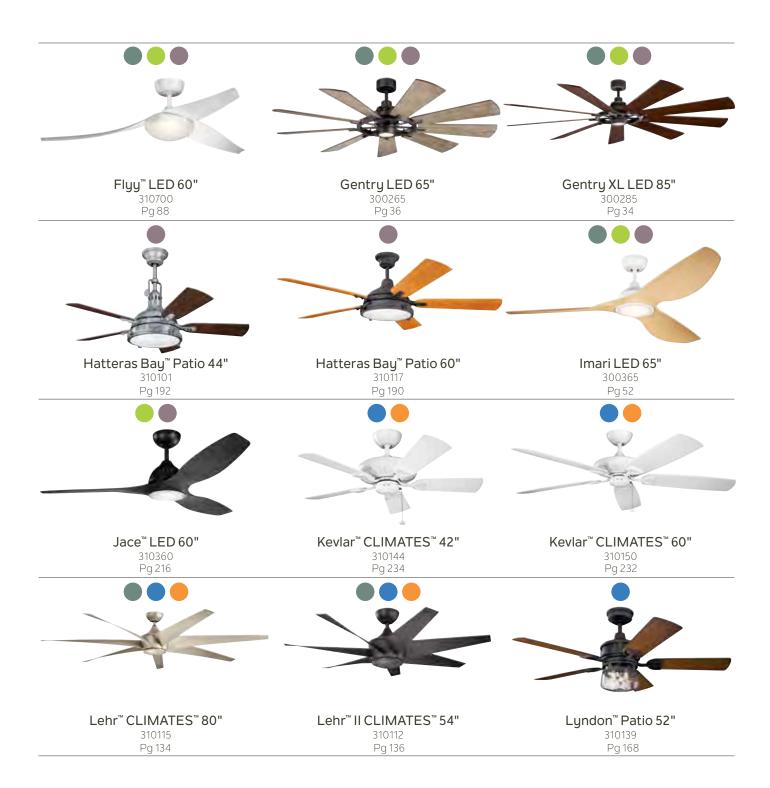

ENERGY STAR° 🛑 LED 🛑 DAMP-RATED 🛑 WET-RATED 🛑 CLIMATES[®]

OUTDOOR/INDOOR FANS VISUAL INDEX



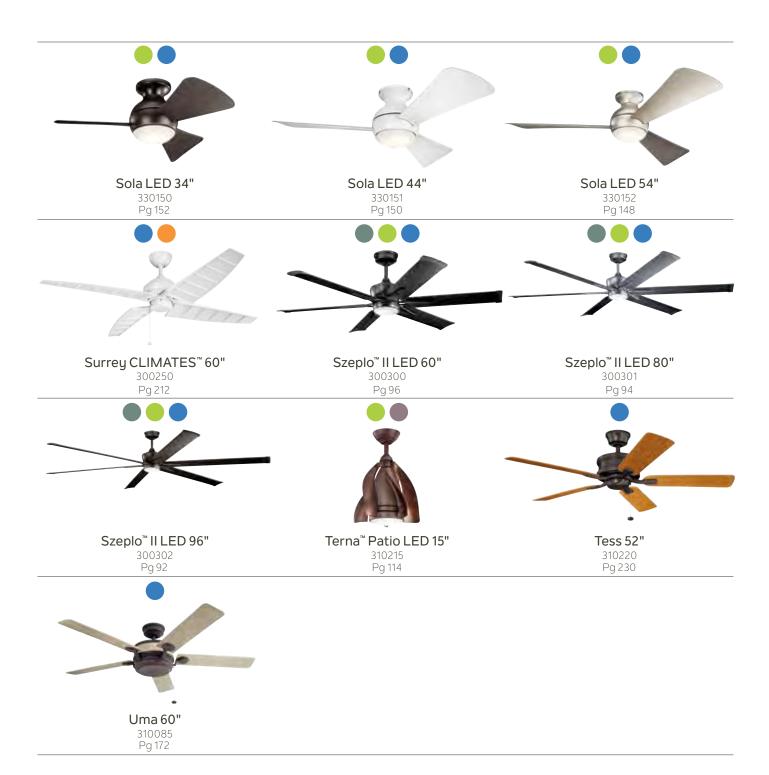









Décor™Fans

The latest looks. Our finest finishes.

The Décor Collection from Kichler[®] helps you add trend-inspired style to your home while filling your space with premium airflow and the latest in lighting technology. Each fan blends our most advanced engineering with a decorator's approach to design: emerging styles, new-to-market finishes and integrated LED lighting that enhances the ambiance of any room.







Gentry LED

Massive in scale and size, Gentry knows how to make an impact – both visually and with impressive airflow. The nine-blade design creates a stunning visual effect on or off. Your choice of industrial era-inspired finish combinations provide styles that fit with modern, classic or rustic settings. The LED light source provides 1,600 lumens of output – about the equivalent of a 150watt incandescent light bulb – for terrific ambient light.





Shown: 300285AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray Blades

85" Gentry XL LED



300285DBK Distressed Black Finish Walnut Shadowed Blades Etched Cased Opal Glass



300285WZC Weathered Zinc Finish Weathered White Walnut Blades Etched Cased Opal Glass

Fan Finish

AVI

DBK

Distressed

Black

wzc

Weathered

Zinc

BLADE SPECS

(Reversible)

Walnut

FB300285

AVI

Walnut

Shadowed

FB300285

DBK

Dark

Walnut

FB300285

WZC

Blade Finish & Part Number

(Side 1)

Distressed Antique Gray FB300285

AVI

Walnut

FB300285

DBK

Weathered White Walnut FB300285 WZC

INCLUDED FEATURES

Blades (9) Included

- 14° Pitch
- 85" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 37.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165NL Amps 0.47 on High RPM 76 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Sconce 44015WZC



HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"	`↓↓.⊂

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
9294	31	300	





Shown: 300265DBK Distressed Black Finish, Etched Cased Opal Glass, with Walnut Shadowed Blades

65" Gentry LED



300265AVI Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass



300265WZC Weathered Zinc Finish Dark Walnut Blades Etched Cased Opal Glass

Blades (9) Included

- 14° Pitch
- 65" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 33.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165NL Amps 0.45 on High RPM 122 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



COORDINATING LIGHTING

To see the complete Fulton Cross[™] Collection visit Kichler.com.



В

D

HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A	
A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"		

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
8061	34	237		









Colerne[™] LED

You'll love the vintage industrial feel that Colerne brings to a space. Wood-tone blades create the look of rustic wood, while metal accents deliver a style that's at home in farmhouse or modern settings. Integrated LED downlighting allow you to fill a space with just the right amount of light.





Shown: 300052DBK Distressed Black Finish, Etched Cased Opal Glass, with Auburn Stained Blades

$52^{\prime\prime}~{\rm Colerne}^{\rm T}{\rm LED}$



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 24.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC Amps 0.59 on High RPM 183 on High Energy Star® No

INCLUDED CONTROLS

65K WALL CONTROL -FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
 Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS

65K COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING


To see the complete Colerne[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 17.00"	B: 12.50"	C: 9.50"	D: 7.25"		

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5205	70	75		





Kichler.com 41





Ried

Get a wood-blade look in a style that works in damp spaces, like an enclosed patio or sunroom. Ried combines unique wood tones with rustic-inspired finishes for a fan that delivers on the emerging modern industrial trend.





Shown: 300356NI Brushed Nickel Finish with Medium Walnut Blades

56" Ried



Anvil Iron Finish Driftwood Blades 3003560Z Olde Bronze[®] Finish Cherry Blades (Shown with 3803560Z LED Light Kit)

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight LED Light Kit 380356 AVI, NI or OZ

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System - Limited Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Damp Hanging Weight 17.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 12mm, AC Amps 0.51 on High RPM 156 on High Energy Star® No



65K WALL CONTROL SYSTEM -LIMITED FUNCTION

- 3 Forwards Speeds & Motor Off
- Manual Reverse- Lights On/Off with Full-Range Dimming
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



65K COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION 370005 (Shown)

OPTIONAL LED DOWNLIGHT



Ried LED Light Kit 380356 AVI, NI (shown), OZ Etched Cased Opal Glass, 17W Integrated LED Platform, 1,600 Im, 80 CRI, 3,000K 6.50" Dia. x 2.75" H

COORDINATED LIGHTING


To see the complete Crosby Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 13.50"	C: 8.00"	D: 6.00"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5260	61	86		









Kyte™

Highly decorative, Kyte brings a whisper-quiet movement of air to rooms in a big way. The ceilingmounted motor design allows the sleek blades to stand apart, simulating the look of wind turbines for a clean and natural aesthetic.





Shown: 300254NI Brushed Nickel Finish with Weathered White Walnut Blades



Rods included to achieve both 24" and 36" fixture drop

Blades (2) Included - 16° Pitch - 50" Sweep - Non-reversible - ABS Downrods N/A Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight Glass N/A Uplight Glass N/A Low Ceiling Adaptable No Control Fan Slide Control

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 28 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC Amps 0.23 on High RPM 84 on High Energy Star[®] No



INCLUDED CONTROLS

FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
- For Use with Most
- Ceiling Fans

OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082



HANGING MEASUREMENTS


WITH 24" FIXTURE DROP				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 24.00"	B: 20.50"	C: 12.25"	D: 12.25"	

WITH 36" FIXTURE DROP

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 36.00"	B: 32.50"	C: 12.25"	D: 12.25"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
N/A	N/A	N/A		

Note: Highly decorative fans (low RPM) exempt from DOE ceiling fan test method.



EXCELLENT QUALITY, SLEEK AND BEAUTIFUL!



This has to be one of the most beautiful fans I have ever seen! Installation was simple, once we figured out how to get to our 18 ft ceiling. Instructions are very detailed, which I appreciate. Controls are fairly simple once you read through the booklet. Great power and creates a good breeze to cool our home. Over all wonderful quality, and just stunning!

- Ar38special | West Virginia

49



Imari LED

With a 65-inch blade span, Imari offers airflow to fit the occasion. The propellerinspired single-mold three-blade design creates a clean, sophisticated look. The LED light source provides 2,300 lumens of output – about the equivalent of two 150-watt incandescent light bulbs – for a substantial amount of room-filling ambient light.





Shown: 300365PN Polished Nickel Finish, White Polycarbonate Lens, with Walnut Blades

65" Imari LED

300365MWH Matte White Finish Light Oak Blades White Polycarbonate Lens 300365SBK Satin Black Finish Weathered White Walnut Blades

White Polycarbonate Lens

Fan Finish

MWH

Matte

White

PN

Polished

Nickel

SBK Satin

Black

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Walnut

FB300365

PN

White Nalnu

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 65" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 23W Dimmable Integrated LED Platform, 2,300 Lumens, 3,000K

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 26.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-188 Amps 0.44 on High RPM 126 on High Energy Star® No



INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.




HANGING MEASUREMENTS

WITH 6" DOWNROD					<u> </u> ←D
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B 	c -
A: 14.50"	B: 11.75"	C: 10.00"	D: 6.25"	↓	_>Z

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
9548	34	282		







Zenith[™] LED

A sweeping look that flows from one blade to another, Zenith brings a Zen-like feel to large living areas. The unique blade design appears to wrap around the fan body, blending the arms and blades into one cohesive piece of functioning art.



Shown: 300200SBK Satin Black Finish, Etched Cased Opal Glass, with Silver Blades

$60^{\prime\prime} \; \text{Zenith}^{\rm T} \text{LED}$



Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 33.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.61 on High RPM 134 on High Energy Star[®] No



INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

Blade Finish & Part Number (Side 1) Fan Finish Satin Black FB300200 PN PN Silver FB300200 SB SBK Satin Black

BLADE SPECS


COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.5" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 14.00"	B: 10.25"	C: 11.50"	D: 6.50"		



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6225	73	86	

LED



Zeus LED

Contrasting polished and matte finishes combine for a powerful visual effect that adds a wow-factor to any large space. The sleek look features blades that are held in place in tandem. Known as "blade irons," this functional – yet unique – metal construction gives the fan a style that works beautifully in contemporary spaces.





Shown: 300060PN Polished Nickel Finish, White Polycarbonate Lens, with Black Blades

60" Zeus LED



Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 30.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.66 on High RPM 170 on High Energy Star[®] No




INCLUDED CONTROLS

BLADE SPECS



HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.00"	B: 11.25"	C: 8.75"	D: 6.00"	



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6200	77	80	

LED



Eris LED

Designed to nestle cleanly against the ceiling while still delivering a generous amount of airflow, Eris marries performance with style. Use inside or out – the sleek design, wet rating and 2,300-lumen light output bring room-filling light to a variety of gathering spaces, including open-air patios or decks.





$60^{\prime\prime}$ Eris LED

310160WN Walnut Finish Walnut Blades Etched Cased Opal Glass **310160WH** White Finish White Blades Etched Cased Opal Glass

Allohosbi Satin Black Finish Satin Black Blades Etched Cased Opal Glass

Blades (3) Included

- 25° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods Optional 337060 Downrod Kit

Downlight Replaceable. 23W Dimmable Integrated LED Platform, 2,300 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cUL Listed Wet Hanging Weight 33.5 lbs. Body Material ABS Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.53 on High RPM 113 on High Energy Star[®] No



INCLUDED CONTROLS


OPTIONAL HANGER SYSTEM



Downrod Kit 337060 NI, SBK, WH (shown), WN


FLUSH MOUNT Fixture Drop Blade Drop Housing Ceiling Canopy Δ (from ceiling) (from ceiling) (width) (width) D: 8.00" A: 11.50" B: 9.00" C: 10.00" **OPTIONAL HANGER SYSTEM** Housing Ceiling Canopy **Fixture Drop** Blade Drop (from ceiling) (from ceiling) (width) (width) A: 14.50" B: 11.00" C: 10.00" D: 6.00" AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Per Minute Watts on High Cubic Ft. on High (Excludes Per Minute Per Watt Lights) 3600 64 56

HANGING MEASUREMENTS



AIR PERFORMANCE (OPT.)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5045	65	78

BLADE SPECS

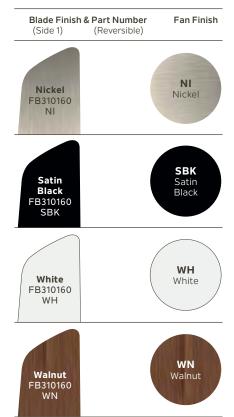



Phree LED

Sleek, stylish and solid with a triangular body and precision blades molded into one piece, creating a seamless contemporary design. The center light provides a focal point versus adding whole-room ambient light.



Shown: 310175NI Nickel Finish, Etched Cased Opal Glass, with Nickel Blades

56" Phree LED

310175WH White Finish White Blades Etched Cased Opal Glass SI0175WN Walnut Finish Walnut Blades Etched Cased Opal Glass

Blades (3) Included

- 22° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 28.5 lbs. Body Material ABS Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.73 on High RPM 142 on High Energy Star[®] No



INCLUDED CONTROLS

65K WALL CONTROL -FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS

65K COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING

To see the complete Moderne Collection visit Kichler.com.




Oval Chandelier/Pendant 42993SNLED

HANGING MEASUREMENTS

	WITH 4.5" I	DOWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 16.00"	B: 15.50"	C: 9.50"	D: 6.75"	` ↓ <u>↓</u>

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6467	87	75	







Spyra LED

Inspired by a stirring whirlwind, Spyra's contoured edges on blades and body reflect the light beautifully. Once in motion, the fan generates a powerful breeze, appearing to gather speed from top to bottom.





62" Spyra LED

300700AP Antique Pewter Finish Walnut Blades Etched Cased Opal Glass 300700NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass

300700NI7 Brushed Nickel Finish Driftwood Blades Etched Cased Opal Glass

Blades (3) Included

- 20° Pitch
- 62" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165M Amps 0.50 on High RPM 116 on High Energy Star[®] No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Roswell[™] Collection visit Kichler.com.



Wall Sconce 43305NI



Chandelier/Pendant 43301NI

HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		_	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 	1
A: 14.25"	B: 14.25"	C: 12.75"	D: 6.75"		

	←D→
1 1	
A B	C⊣→⊟→
	\frown
↓ <u>*</u> .⊂	

. . .

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
6467	36	181			





BLADE SPECS





Voya™ LED

Voya combines smooth textures and materials in high-tech harmony. The look delivers a smooth breeze in fully aerodynamic fashion.



 $\mathit{Shown:}\ \textbf{300706WH}\ \textbf{White}\ \textbf{Finish}, \ \textbf{Etched}\ \textbf{Cased}\ \textbf{Opal}\ \textbf{Glass}, \ \textbf{with}\ \textbf{Clear}\ \textbf{White}\ \textbf{Blades}$





300706BSS Brushed Stainless Steel Finish Clear Champagne Blades Etched Cased Opal Glass

Blades (3) Included

- 20° Pitch
- 60" Sweep
- Non-reversible
- Polycarbonate

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.4 lbs. Body Material Polycarbonate Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm Amps 0.47 on High RPM 128 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS




DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

BLADE SPECS



HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 15.00"	B: 11.75"	C: 12.75"	D: 7.00"		



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
7587	34	220		





Xety[™] LED

Xety does more with less: the two innovative blades deliver air movement while the LED light brings brilliant illumination to a space. Authentic industrial hardware enhances the visual interest.





56" Xety" LED



Blades (2) Included

- 16° Pitch
- 56" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.71 on High RPM 191 on High Energy Star[®] No

INCLUDED CONTROLS

WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 337009 (Shown)

COORDINATING LIGHTING

To see the complete Erzo Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B 	С
A: 13.75"	B: 11.00"	C: 5.50"	D: 5.75"	` ↓ <u>↓</u> .⊏	

AIR	PERF	ORMA	NCE

AIRFLOW Cubic Ft. Per Minute	POWER USAGE Watts on High	AIRFLOW EFFICIENCY Cubic Ft.
on High	(Excludes Lights)	Per Minute Per Watt
6258	82	76







AMAZING LIGHT FIXTURE



I love this ceiling fan. It took minutes to install, it is exceptionally beautiful, and the quality of the piece is outstanding. You can not hear it when it is on, which is important because it is in my bedroom. I love the color, it is kind of an espresso wood color. Because mine is so beautiful, my mother went and bought one! I plan to have one in every room of my house.

- Kayla McCoy | Gibraltar, MI



Jade LED

The Japanese art of origami is known for turning a flat plane into a sculpture. Jade's intricately engineered folds work in harmony to move air effectively.





Shown: 300030AP Antique Pewter Finish, White Polycarbonate, with Satin Black Blades

60" Jade LED

300030NI Brushed Nickel Finish Silver Blades White Polycarbonate and the second s

White Polycarbonate

Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.55 on High RPM 159 on High Energy Star[®] No



WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



COORDINATED LIGHTING

To see the complete Branches Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.5" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 13.75"	B: 12.75"	C: 9.25"	D: 6.75"		

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5439	66	82		



Δ R





THE BEST CEILING FAN I HAVE EVER OWNED!

This ceiling fan has both a beautiful modern sleek design as well as superior functionality. The 60 inch span and unique design of the blades provides amazing air flow. The instructions were easy to follow and install was simple. I would highly recommend this product to anyone who wants an above average ceiling fixture.

- AshlyKaye | Orange, VA



Flyy LED

Nature knows best: With a blade shape and form modeled after the wings of a bird, the Flyy fan moves air with silent precision.





Shown: 310700WSP Weathered Steel Finish, Etched Cased Opal Glass, with Driftwood Blades

60" Flyy[™]LED

310700MWH Matte White Finish Matte White Blades Etched Cased Opal Glass **3107000Z** Olde Bronze[®] Finish Walnut Blades

Etched Cased Opal Glass

60" Flyy[™] LED



INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 15.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm Amps 0.46 on High RPM 160 on High Energy Star® No

HANGING MEASUREMENTS

non-light use.

	WITH 6" D	OWNROD			←D→
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B 	c F
A: 14.25"	B: 13.50"	C: 10.75"	D: 6.75"	↓ <u>↓</u>	⊃>r

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
7656	33	236			



FAN-TASTIC FAN! ***** **f** This fan is great! It was easy to install for my husband and the directions were simple enough to follow. The fan itself feels durable. The design is flawless and looks great in the room. It is quiet and moves the perfect amount of air. - MRRN | Michigan

> Kichler.com 89




Szeplo" II LED

Inspired by industrial machinery, extruded aluminum blades are held by geometrically designed arm irons. Dimmable LED light adds perfect illumination to any room.





96" Szeplo[™] II LED

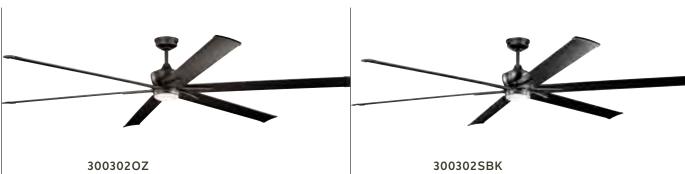

30030202 Olde Bronze[®] Finish Olde Bronze[®] Blades Etched Cased Opal Glass 300302SBK Satin Black Finish Satin Black Blades Etched Cased Opal Glass

Blades (6) Included

- 13° Pitch
- 96" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 34.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.39 on High RPM 63 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







HANGING MEASUREMENTS

	WITH 6" D	OWNROD			←D→
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	Î Î A B 	
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"	`↓↓.⊂	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
12854	31	419		



BLADE SPECS



KICHLER'S FANS ARE THE BEST!



Another great Kichler product! Having acquired this fan online, I was not sure about the materials and how it looked in person. The moment I "deboxed" and started putting this fan together, I knew it was another extremely great quality product from Kichler. This fan is huge, the blades are metal and can seriously put off some breeze. I also love the fact that if you are using it for outside and do not need the light kit, they already have a metal cover to go over it. Plus the wall mounted remote and switch is really convenient. I cannot praise Kichler enough, 2nd product from them and many more to come! - jerebob1430 | West Jefferson, NC

Kichler.com



80" Szeplo" II LED



300301SBK Satin Black Finish Satin Black Blades Etched Cased Opal Glass



300301WSP Weathered Steel Finish Weathered Steel Blades Etched Cased Opal Glass

Blades (6) Included

- 13° Pitch
- 80" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 32.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.52 on High RPM 91 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







HANGING MEASUREMENTS

	WITH 6" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"	ļ

Per Watt

282

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW		
Per Minute	Watts on High	Cubic Ft.		
on High	(Excludes	Per Minute		

Lights)

35

9890



В

BLADE SPECS





60" Szeplo[™] II LED



3003000Z Olde Bronze[®] Finish Olde Bronze[®] Blades Etched Cased Opal Glass



300300WSP Weathered Steel Finish Weathered Steel Blades Etched Cased Opal Glass

Fan Finish

οz

Olde

Bronze

SBK

Satin

Black

INCLUDED FEATURES

Blades (6) Included

- 13° Pitch
- 60" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 28.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165M Amps 0.50 on High RPM 140 on High Energy Star® No

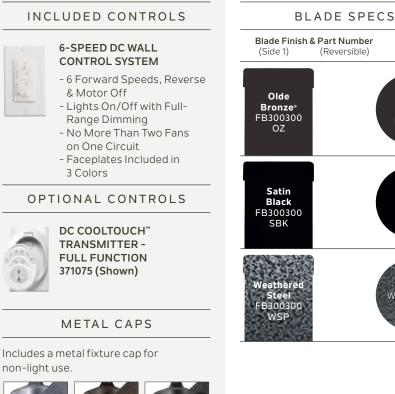



COORDINATING LIGHTING

To see the complete Bensimone Collection visit Kichler.com.



D.

HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.00"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
7308	32	225		



Kichler.com 97



Bisc LED

With a seamless globe and fan combination, Bisc provides balanced airflow in a style that's elegant and understated.



CRUSHED CRYSTAL GLASS

Shown: 300710PNC Polished Nickel Finish, Crushed Crystal Glass, with Black Blades

56" $Bisc^{T}LED$

300710PN Polished Nickel Finish Silver Blades Etched Cased Opal Glass 300710MWH Matte White Finish Matte White Blades Etched Cased Opal Glass



Cherry Blades Etched Cased Opal Glass

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal, Crushed Crystal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 15.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm Amps 0.26 on High RPM 166 on High Energy Star® No

6-SPEED DC WALL CONTROL SYSTEM - 6 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-Range Dimming - No More Than Two Fans on One Circuit - Faceplates Included in 3 Colors OPTIONAL CONTROLS DC COOLTOUCH^{TT} TRANSMITTER -FULL FUNCTION 371075 (Shown)

INCLUDED CONTROLS

COORDINATING LIGHTING

To see the complete Moonlit Collection visit elan-lighting.com.






HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 A B
A: 16.50"	B: 10.50"	C: 9.75"	D: 6.25"	↓↓.⊂

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4879	17	285		





Ferron

As sleek and aerodynamic as a hightech propeller, Ferron employs pure physics to create robust amounts of air. The streamlined motor housing and contoured blades work together to fill a room with style and comfort.



60" Ferron™

300160NI Brushed Nickel Finish Clear Champagne Blades



300160PN Polished Nickel Finish Clear Champagne Blades

Blades (2) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Polycarbonate

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 16.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 112 on High Energy Star® No



6-SPEED DC COOLTOUCH[™] CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS

6-SPEED DC WALL TRANSMITTER -FULL FUNCTION 370036 (Shown)



HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.00"	B: 15.25"	C: 7.25"	D: 6.00"	

	←D→
↑ ↑ А В 	
↓↓.⊂	

	AIR PERFORMANCE
--	-----------------

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
5236	Lights)	Per Watt 167







Shuriken[™] LED

Inspired by the silent motion of a stingray, Shuriken moves air with abundant ease. Its blades appear to be sculpted out of a single piece of material for a flowing visual effect.





 $52^{\prime\prime}~{\rm Shuriken}^{\rm T}~{\rm LED}$



3002090BB Oil Brushed Bronze[™] Finish Walnut Blades Etched Cased Opal Glass



300209SBK Satin Black Finish Dark Driftwood Blades Etched Cased Opal Glass

Blades (4) Included

- 13° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 22 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.69 on High RPM 135 on High Energy Star® No

INCLUDED CONTROLS **COOLTOUCH**[™] **CONTROL SYSTEM -**FULL FUNCTION - 3 Forward Speeds & Motor Off - Manual Reverse - Lights On/Off with Full-Range Dimming OPTIONAL CONTROLS WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)

COORDINATING LIGHTING

To see the complete Evie[™] Collection visit Kichler.com.



D



HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	1
A: 15.00"	B: 8.75"	C: 11.75"	D: 6.75"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
2238	81	27		





Terna[™] LED

Terna offers the fun and whimsy of a pinwheel, modernized. The size and scale make it ideal for use in small spaces or in multiples. Think walk in closets, dining nooks or over a desk.





Shown: 3002300BB Oil Brushed Bronze[®] Finish, Etched Cased Opal Glass, with Oil Brushed Bronze[®] Blades

15" Terna[™] LED

300230NI Brushed Nickel Finish Champagne Blades Etched Cased Opal Glass



300230WH White Finish White Blades Etched Cased Opal Glass



Blades (5) Included

- Variable Pitch
- 15" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control CoolTouch[™] Control System -**Full Function**

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 15.9 lbs. Body Material Steel Warrantywww.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.25 on High RPM 318 on High Energy Star® No

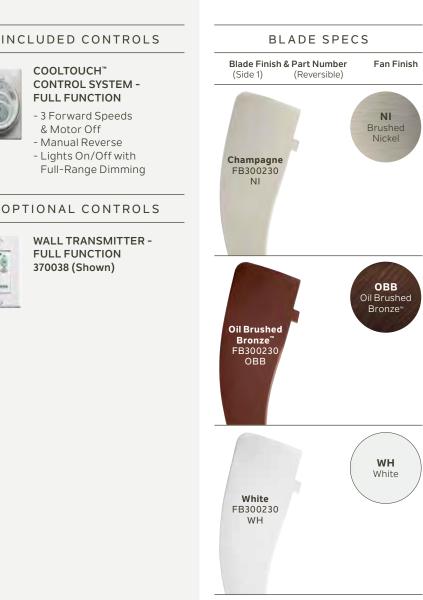

HANGING MEASUREMENTS

WITH 4.5" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 20.00"	B: 19.25"	C: 10.50"	D: 6.25"		

Per Minute

Per Watt

11

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW		
Per Minute	Watts on High	Cubic Ft.		


(Excludes

Lights)

32

on High

359



COOLTOUCH[™]


& Motor Off

FULL FUNCTION

- Manual Reverse

FULL FUNCTION

370038 (Shown)



Terna[™]'s contoured blade design produces a unique outward airflow pattern to cool a wider area.



15[™] Terna[™] Patio LED

310215TZP Tannery Bronze[®] Finish Oil Brushed Bronze[®] Blades Etched Cased Opal Glass



V

Blades (5) Included

- Variable Pitch
- 15" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Control System - Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cUL Listed Damp Hanging Weight 15.9 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.28 on High RPM 322 on High Energy Star® No



INCLUDED CONTROLS

COOLTOUCH[™] CONTROL SYSTEM -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with
- Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)



HANGING MEASUREMENTS


WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 20.00"	B: 19.25"	C: 10.50"	D: 6.25"	

AIR PERFORMANCE	
-----------------	--

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
351	33	11



В



Terna[™]'s contoured blade design produces a unique outward airflow pattern to cool a wider area.

115



Link

With a unique center ring, the dual blades of the Link fan seem to flow into one seamless piece. In motion, Link moves a generous amount of air while creating an orbital focal piece.







Blades (2) Included

- 28° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

 $\textbf{Uplight} \; N/A$

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 18.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 132 on High Energy Star® No



INCLUDED CONTROLS

6-SPEED DC COOLTOUCH[™] CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full-
 - No More Than Two Fans
 - on One Circuit


OPTIONAL CONTROLS

6-SPEED DC WALL TRANSMITTER 370036 (Shown)



HANGING MEASUREMENTS

FLUSH MOUNT					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 24.25"	B: 24.25"	C: 8.00"	D: 8.00"		




AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5780	31	184		

DC











Kichler® Fans

Indoor and outdoor options for every style.

Every room has its purpose; and for every purpose, there's a Kichler ceiling fan. Great in scale or small in stature. Inside living or outdoor entertaining. Our extensive collection leaves no detail to chance, with unique designs that not only look beautiful, but move air efficiently and effectively.







Shown: 300270SBK Satin Black Finish, White Polycarbonate Lens, with Satin Black Blades

$56^{\prime\prime}$ Incus[®] LED



300270SNB Satin Natural Bronze Finish Satin Natural Bronze Blades White Polycarbonate Lens

300270WH White Finish White Blades White Polycarbonate Lens

Fan Finish

SBK

Satin

Black

SNB

Satin

Natural

Bronze

WH

White

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Satin

Black FB300270

SBK

Satin

Natural

Bronze

FB300270

SNB

White

FB300270

WΗ

INCLUDED FEATURES

Blades (3) Included

- Variable Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 21.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 16mm, AC Amps 0.48 on High RPM 120 on High Energy Star® No

HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture I (from ce		Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B
A: 13.7	'5"	B: 12.75"	C: 9.25"	D: 6.75"	<u>+</u> .Σ

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5277	57	93		



INCLUDED CONTROLS

65K WALL CONTROL SYSTEM - FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming - Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION

370006 (Shown)

COORDINATING LIGHTING

To see the complete Lakum[™] Collection visit Kichler.com.



Pendant 43090CLP Shown: 300275NI Brushed Nickel Finish, Etched Cased Opal Glass, with Black Blades

52" Spyn LED

300275AVI Anvil Iron Finish Distressed Antique Gray Blades Etched Cased Opal Glass **300275WH** White Finish Silver Blades Etched Cased Opal Glass

Blades (3) Included

- 13° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Dual Slide Control

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 22.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.53 on High RPM 162 on High Energy Star® No

INCLUDED CONTROLS

DUAL SLIDE CONTROL

- All-Speed Fan &
- Light Control - Controls One Fan and Light
- Full-Range Dimming
- Light Control
- Faceplate IncludedFor Use with Most
- Ceiling Fans

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -

LIMITED FUNCTION 371042 (Shown)

371082

COORDINATING LIGHTING






HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 14.50"	B: 9.00"	C: 7.00"	D: 6.00"	↓.

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5056	63	80		





Shown: 310155NI Brushed Nickel Finish, Etched Cased Opal Glass, with Nickel Blades

60" Rana[™] LED



Blades (3) Included

- 35° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 25.1 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.59 on High RPM 206 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



FULL FUNCTION 337009 (Shown)

Blade Finish & Part Number Fan Finish (Side 1) (Reversible) NI Nickel Brushed FB310155 Nickel NI Satin SBK Black FB310155 Satin Black SBK

BLADE SPECS


METAL CAPS

Includes a metal fixture cap for non-light use.



HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 15.75"	B: 14.50"	C: 8.75"	D: 5.75"		



AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY		
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt		
8536	70	121		



Shown: 300146PN Polished Nickel Motor Assembly Finish with 338203PN LED Light Kit (Sold Separately), 370030PN Clear Champagne Blades (Sold Separately)

38"/48"/58" Arkwright Motor Assembly



3001460BB Oil Brushed Bronze[™] Motor Assembly Finish 3700250BB 38" Walnut Blades 338203OBB LED Light Kit (Blades and Light Kit Sold Separately)



300146AP Antique Pewter Motor Assembly Finish 370030AP 58" Clear Black Blades (Blades Sold Separately)



300146PN Polished Nickel Motor Assembly Finish 370027PN 58" Sapelle Blades (Blades Sold Separately)



300146AP Antique Pewter Motor Assembly Finish 370027AP 58" Cherry Blades (Blades Sold Separately)





3001460BB Oil Brushed Bronze[™] Motor Assembly Finish 3700300BB 58" Clear Oil Brushed Bronze[™] Blades (Blades Sold Separately)



300146AP Antique Pewter Motor Assembly Finish 370025AP 38" Light Cherry Blades (Blades Sold Separately)



300146WH White Motor Assembly Finish 370030WH 58" Clear White/ Silver Speck Blades (Blades Sold Separately)

Blades (3) Included

- 13° Pitch
- Multiple Blade Sweep Options
- Wood (Reversible) or Polycarbonate (Non-Reversible)

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight Accessory Light Kits available on page 130

Uplight N/A

Uplight Glass N/A


Low Ceiling Adaptable No Control 6-Speed DC CoolTouch[™]

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 12.3 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.46 on High RPM 176 on High Energy Star® No

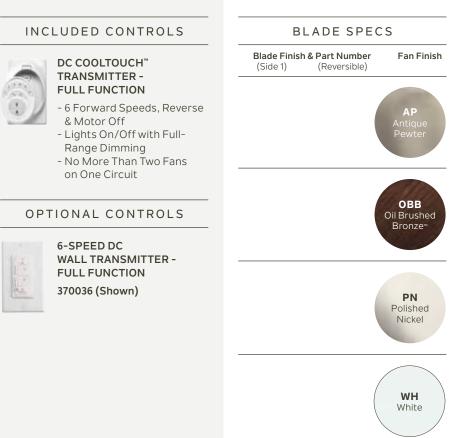

Customize Arkwright[™] to your personal style in 4 easy steps:

Choose Fan Finish

🔶 Light Kit

→ Blade Material

4 Blade Length

D

See pages 130-131.

HANGING MEASUREMENTS

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 15.25"	B: 12.75"	C: 7.50"	D: 5.75"	↓↓

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5779	32	178		



Arkwright[™] Ordering Guide





338203AP, OBB, PN, WH

Etched Cased Opal Glass 17W LED Platform, 1,600 Lumens, 80 CRI, 3,000K CCT, 2.00" H x 7.50" D, Module Included

Incandescent

380047AP, OBB, PN, WH

Etched Cased Opal Glass (1) E11, 100W Halogen, 2.00" H x 7.50" D, Lamp Included

Fan Body Finish	Optional Light Kit - LED	Optional Light Kit - Incandescent
Antique Pewter - 300146AP	338203AP	380047AP
Oil Brushed Bronze [™] - 300146OBB	338203OBB	3800470BB
Polished Nickel - 300146PN	338203PN	380047PN
White - 300146WH	338203WH	380047WH



Blade Material & Finish	Blade Length 38"	Blade Length 48"	Blade Length 58"
Reversible Wood - Light Cherry/Cherry Blades	370025AP	370026AP	370027AP
Reversible Wood - Walnut/Cherry Blades	3700250BB	3700260BB	3700270BB
Reversible Wood - Maple/Sapelle Blades	370025PN	370026PN	370027PN
Reversible Wood - White Blades	370025WH	370026WH	370027WH
Polycarbonate - Clear Black Blades	370028AP	370029AP	370030AP
Polycarbonate - Clear Oil Brushed Bronze [™] Blades	3700280BB	3700290BB	3700300BB
Polycarbonate - Clear Champagne/Silver Blades	370028PN	370029PN	370030PN
Polycarbonate - Clear White/Silver Speck Blades	370028WH	370029WH	370030WH

Note: Fan blades can be used with any Motor Housing Finish.



$52^{\prime\prime} \; \text{Arkwet}^{\text{T}} \; \text{CLIMATES}^{\text{T}}$

339629MWH Matte White Finish Matte White Blades Sage Server Serv

Blades (3) Included

- 13° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight 338629 CLIMATES[™] LED Light Kit

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 18.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.43 on High RPM 177 on High Energy Star[®] No

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082

OPTIONAL LED DOWNLIGHT



CLIMATES" LED Light Kit 338629 MWH, WCP, WSP Etched Cased Opal Glass, 17W Dimmable Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K 7.50" Dia. x 3.25" H



HANGING MEASUREMENTS


WITH 4.5" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 13.75"	B: 11.00"	C: 7.50"	D: 11.00"	_	

103

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY		
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt		

49

5024





Shown: 310115ANS Antique Satin Silver Finish with Antique Satin Silver Blades

$80^{\prime\prime} \text{ Lehr}^{\rm T} \text{ CLIMATES}^{\rm T}$



310115DBK Distressed Black Finish Distressed Black Blades **310115CMO** Coffee Mocha Finish Coffee Mocha Blades

Blades (7) Included - 12° Pitch - 80" Sweep - Non-reversible - ABS Downrods 8" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 30.8 lbs. **Body Material ABS** Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165L Amps 0.56 on High RPM 78 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC COOLTOUCH[™] CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off Lights On/Off with Full-
- Range Dimming - No More Than Two Fans
- on One Circuit

OPTIONAL CONTROLS

6-SPEED DC WALL TRANSMITTER -**FULL FUNCTION** 370036 (Shown)

COORDINATING LIGHTING

To see the complete LED Outdoor Wall Collection visit Kichler.com.



Outdoor Wall Sconce 11309BKTLED

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) Antique Satin Silver ANS Satin Silver FB310115 Coffee смо Mocha Coffee FB310115 Mocha смо Distressed DBK Black Distressed FB310115 Black DBK

HANGING MEASUREMENTS

	_			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	ABC +
A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"	

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
7744	33	237			







CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold and constant UV exposure.



Shown: 310112CMO Coffee Mocha Finish with Coffee Mocha Blades

$54^{\prime\prime} \; \text{Lehr}^{\scriptscriptstyle \rm M} \text{II} \; \text{CLIMATES}^{\scriptscriptstyle \rm M}$



310112ANS Antique Satin Silver Finish Antique Satin Silver Blades



310112 DBK Distressed Black Finish Distressed Black Blades

Blades (7) Included - 12° Pitch - 54" Sweep - Non-reversible - ABS Downrods 8" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch[™] Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 28.6 lbs. Body Material ABS Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.54 on High RPM 106 on High Energy Star® No



6-SPEED DC COOLTOUCH[™] CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
 - Lights On/Off with Full-
- Lights On/On with Full-Range Dimming - No More Than Two Fans
- on One Circuit

OPTIONAL CONTROLS

6-SPEED DC WALL TRANSMITTER -FULL FUNCTION 370036 (Shown)




HANGING MEASUREMENTS

	WITH 8" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"	↓↓.⊂

AIR	PERFORM	IANCE
IRFLOW	POWER	AIRFLOW

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
5133	31	165







CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold and constant UV exposure.



Shown: 300125MCH Midnight Chrome Finish, Etched Cased Opal Glass, with Black Blades

$54^{\prime\prime}~\text{Cadence}^{\scriptscriptstyle \rm T}$



Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- Polycarbonate

Downrods 4" and 12" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) E11, 75W Halogen/JD Lamp, 5910CLR

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.49 on High RPM 195 on High Energy Star® No



INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.




HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling) Blade Drop (from ceiling) Housing (width) Ceiling Canopy (width)			
A: 16.00"	B: 10.25"	C: 12.00"	D: 6.00"

WITH 12" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 24.00"	B: 18.25"	C: 12.00"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6084	58	105	





BLADE SPECS





Shown: 310104NI Brushed Nickel Finish, Etched Cased Opal Glass, with Cherry Blades

52" Cameron™



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 40W Krypton/T3 Lamps, 4063CLR

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Transmitter - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 26.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.52 on High RPM 165 on High Energy Star[®] No



INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming


OPTIONAL CONTROLS





HANGING MEASUREMENTS

	WITH 4" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 16.25"	B: 12.00"	C: 14.75"	D: 7.00"	



AIR	PERF	ORMANCE	
-----	------	---------	--

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
4955	62	79





56" Ellys LED



Brushed Nickel Finish Walnut Blades Etched Cased Opal Glass

Blades (7) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 28.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-165M Amps 0.51 on High RPM 156 on High Energy Star® No

INCLUDED CONTROLS

6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] TRANSMITTER -FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Cirus[™] Collection visit Kichler.com.




43755AUB

HANGING MEASUREMENTS

	WITH 6" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.00"	B: 12.75"	C: 9.50"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6306	30	202	





BLADE SPECS





Shown: 300251NI Brushed Nickel Finish, Satin Etched Glass, with Silver Blades





3002510LZ Oiled Bronze[™] Finish Medium Cherry Blades Satin Etched Glass SOO251WH White Finish White Blades

Satin Etched Glass

Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (2) B10, 5W LED Lamps

Downlight Glass Satin Etched

Optional Downlight N/A

Uplight Uses (2) B10, 5W LED Bulbs Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Indoor Hanging Weight 30 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.82 on High RPM 194 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS




TRANSMITTER -FULL FUNCTION 337009 (Shown)



HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 16.00"	B: 11.75"	C: 13.75"	D: 6.00"	ļ



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
6637	97	68		



Shown: 300304NI Brushed Nickel Finish, Etched Cased Opal Glass, with Walnut Blades



300304SBK Satin Black Finish Satin Black Blades Etched Cased Opal Glass 3003040BB Oil Brushed Bronze[™] Finish Cherry Blades Etched Cased Opal Glass

Blades (3) Included

- 14° Pitch
- 48" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 17 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.47 on High RPM 193 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lytham[™] Collection visit Kichler.com.



В

D

HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 16.00"	B: 12.00"	C: 7.50"	D: 6.00"	

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
4743	57	83			



BLADE SPECS



Shown: 330152MWH Matte White Finish, Etched Cased Opal Glass, with Matte White Blades

$54^{\prime\prime}_{\rm Sola\,LED}$

330152NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 330152OZ Olde Bronze[®] Finish Brown Blades Etched Cased Opal Glass



Brown Blades Etched Cased Opal Glass 3370330Z

Optional Downrod Kit (Sold Separately)

Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 18.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 125 on High Energy Star® No



WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



Downrod Kit 337033 MWH, NI, OZ (shown)


HANGING MEASUREMENTS

FLUSH MOUNT			<u> </u>		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B	
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"	<u>+</u> .	

OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5096	70	73		





AIR PERFORMANCE (OPT.)					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
5754	70	91			

BLADE SPECS



 $\mathit{Shown:}\,\textbf{330151NI}\,Brushed\,Nickel\,Finish,\,Etched\,Cased\,Opal\,Glass,\,with\,Silver\,Blades$



330151MWH Matte White Finish Matte White Blades Etched Cased Opal Glass 3301510Z Olde Bronze[°] Finish Brown Blades Etched Cased Opal Glass



3370330Z Optional Downrod Kit (Sold Separately)

Blades (3) Included

- 17° Pitch
- 44" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 15.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mmX 15mm, AC Amps 0.57 on High RPM 170 on High Energy Star® No



WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM




HANGING MEASUREMENTS

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 A B 	(
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"	`↓↓.⊂	

OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4298	68	63		





AIR PERFORMANCE (OPT.)					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
4705	68	77			





Shown: 3301500Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Brown Blades



Blades (3) Included

- 22° Pitch
- 34" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 78" cETL Listed Wet Hanging Weight 14.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 12mm, AC Amps 0.54 on High RPM 226 on High Energy Star® No



WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



OPTIONAL HANGER SYSTEM



HANGING MEASUREMENTS

	FLUSH	MOUNT		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"	

OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
3509	65	54		

↑ ↑ A B	c⊢⊟→
+	

|←D→|



AIR PERFORMANCE (OPT.)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3831	65	65	





Shown: 3003520Z Olde Bronze® Finish, Etched Cased Opal Glass, with Weathered Medium Oak Blades

52" Chiara LED



Fan Finish

οz

Olde

Bronze

NI

Brushed

Nickel

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Weathered

Medium Oal FB300352

Driftwood

FB300352 NI

INCLUDED FEATURES

Blades (3) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods N/A

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount


Control 65K Wall Control System -Limited Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 8" cETL Listed Indoor Hanging Weight 18.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC Amps 0.45 on High RPM 189 on High Energy Star® No



65K WALL CONTROL SYSTEM -LIMITED FUNCTION

- 3 Forwards Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming
- Faceplates Included in
- 3 Colors

OPTIONAL CONTROLS



65K COOLTOUCH[™] **TRANSMITTER -**LIMITED FUNCTION 370005 (Shown)


COORDINATING LIGHTING



HANGING MEASUREMENTS

FLUSH MOUNT				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 10.50"	B: 7.50"	C: 7.00"	D: 7.00"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4245	54	79		





Shown: 3000110ZW Olde Bronze* Finish, Downlight 380000AP Etched Cased Opal Glass (Sold Separately), with Walnut Blades

60" Olympia™

300011AP Antique Pewter Finish Dark Cherry Blades Etched Cased Opal Glass

BOOD110Z Dide Bronze[°] Finish

Walnut Blades Sunset Marble Glass 3800000Z

Sunset Marble Light Kit (Sold Separately)

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" and 12" downrod with 1" (O.D.) Note: Decor trim must be removed for use with 6" downrod.

Downlight N/A

Downlight Glass N/A

Optional Downlight Bowl Light 380000 AP, OZ (Sunset Marble Glass) or OZW

Uplight Includes (6) E12, 15W, C7 Lamps

Uplight Glass Etched Cased Opal, Sunset Marble

Low Ceiling Adaptable No

Control CoolTouch[™] Control System - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 30.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.63 on High RPM 145 on High Energy Star[®] No

INCLUDED CONTROLS

COOLTOUCH[™] CONTROL SYSTEM -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)

OPTIONAL DOWNLIGHT



Bowl Light Fixture 380000 AP, OZW Etched Cased Opal (3) E12, 40W, B10.5 Lamps Included 11.00" Dia. x 6.25" H



Bowl Light Fixture


380000 OZ Sunset Marble (3) E12, 40W, B10.5 Lamps Included 11.00" Dia. x 6.25" H

HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture DropBlade DropHousing(from ceiling)(from ceiling)(width)			Ceiling Canopy (width)	
A: 15.00"	D: 6.25"			
WITH 12" DOWNROD				
Fixture Drop Blade Drop Housing Ceiling Canopy (from ceiling) (from ceiling) (width) (width)				

(from ceiling)	(from ceiling)	(width)	(width)
A: 21.00"	B: 19.00"	C: 13.75"	D: 6.25"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5754	71	81	









Shown: 3002560BB Oil Brushed Bronze[®] Finish, Etched Cased Opal Glass, with Walnut Blades

60" Trevor[™] II LED



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 23W Dimmable Integrated LED Platform, 2,300 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 34.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.66 on High RPM 138 on High Energy Star® No

INCLUDED CONTROLS

WALL CONTROL -FULL FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS




TRANSMITTER -FULL FUNCTION 337009 (Shown)





HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.00"	B: 11.75"	C: 14.00"	D: 5.75"	



AIR PERFORMANCE AIRFLOW AIRFLOW POWER Cubic Ft. USAGE EFFICIENCY Cubic Ft. Per Minute Watts on High Per Minute on High (Excludes Per Watt Lights) 6039 80 76



60" Ashbyrn



Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood Veneer

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 11.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC Amps 0.69 on High RPM 144 on High Energy Star[®] No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082






BLADE SPECS

HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 15.50"	B: 13.50"	C: 12.25"	D: 6.75"	



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6698	82	81	



 $52^{\prime\prime} \text{ Lacey}^{\ast} \text{II} \text{LED}$



Fan Finish

AP

οz

Olde

Bronze

BLADE SPECS

(Reversible)

eathered White Nalnut

330002

Walnut FB300024

OZ

Blade Finish & Part Number

(Side 1)

Cherry FB300024

AP

Medium

Cherry

FB300024

ΟZ

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 19.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type DC-125 Amps 0.48 on High RPM 174 on High Energy Star® No



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



DC COOLTOUCH[™] **TRANSMITTER -**FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING


To see the complete Lacey[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 6" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	1
A: 16.75"	B: 11.75"	C: 11.00"	D: 6.75	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5748	35	166	





Shown: 300027AP Antique Pewter Finish, Etched Cased Opal Glass, with Weathered White Walnut Blades

$52^{\prime\prime} \,\, \text{Ridley}^{^{\rm \tiny T}} \text{II} \, \text{LED}$

300027BSS Brushed Stainless Steel Finish Medium Oak Blades Etched Cased Opal Glass 300027NBR Natural Brass Finish Cherry Blades Etched Cased Opal Glass

3000270BB Oil Brushed Bronze[™] Finish Walnut Blades Etched Cased Opal Glass

Blades (3) Included

- 14° Pitch
- 52" Sweep
- Non-reversible
- Solid Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 17.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.44 on High RPM 143 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



COORDINATING LIGHTING

To see the complete Maclain Collection visit Kichler.com.




HANGING MEASUREMENTS

E

WITH 4.5" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.25"	B: 13.25"	C: 6.75"	D: 5.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4388	50	87	










Shown: 3101400Z Olde Bronze® Finish, Clear Seeded Glass, with Walnut Blades

60" Lyndon[™] Patio

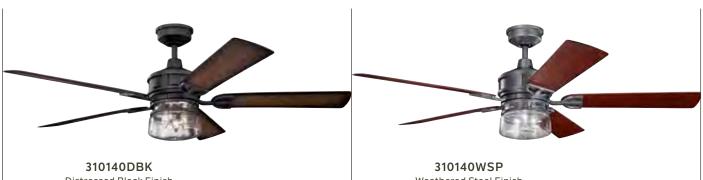

310140DBK Distressed Black Finish Walnut Shadowed Blades Clear Seeded Glass 310140WSP Weathered Steel Finish Teak Blades Clear Seeded Glass

Blades (5) Included

- 13° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) B10, 40W, 4063CLR

Downlight Glass Clear Seeded

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 12.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.64 on High RPM 127 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



visit Kichler.com.

TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon[™] Collection



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"	

AIR	PERF	ORMAI	NCE

AIRFLOW Cubic Ft. Per Minute	POWER USAGE Watts on High	AIRFLOW EFFICIENCY Cubic Ft.
on High	(Excludes Lights)	Per Minute Per Watt
5393	74	72



BLADE SP	ECS
----------	-----





- Melissa M | Florida



Shown: 310139WSP Weathered Steel Finish, Clear Seeded Glass, with Walnut Blades

52" Lyndon[®] Patio



Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) B10, 40W, 4063CLR

Downlight Glass Clear Seeded

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 10.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC Amps 0.54 on High RPM 161 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon[™] Collection



A B

D

HANGING MEASUREMENTS

WITH 4.5" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"

AIR	PERF	ORMA	NCE
-----	------	------	-----

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4946	65	77




BLADE SPECS





Shown: 310170AVI Anvil Iron Finish, Etched Cased Opal Glass, with Distressed Antique Gray Blades

$60^{\prime\prime} \text{ Ahrendale}^{\rm T} \text{LED}$

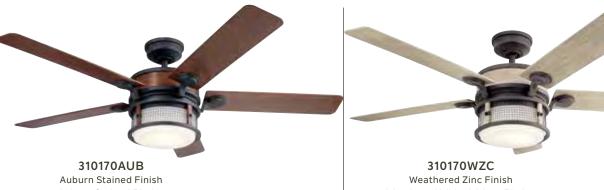

Auburn Stained Blades Etched Cased Opal Glass Weathered White Walnut Blades Etched Cased Opal Glass

Blades (5) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 34.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.60 on High RPM 145 on High Energy Star[®] No



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		←D→	
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 16.50"	B: 9.75"	C: 11.75"	D: 6.75"		

AIR	PERFORM	IANCE
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5763	72	80



BLADE SPECS





Shown: 310085WZC Weathered Zinc Finish with Weathered White Walnut Blades



380949AUB Etched Cased Opal Ahrendale[™] LED Light Kit (Sold Separately)

Blades (5) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight LED Light Kit 380949 AUB, AVI or WZC

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 31.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC Amps 0.60 on High RPM 145 on High Energy Star® No

PULL CHAIN - 3 Speeds - 3 Forward & Reverse - Manual Reverse OPTIONAL CONTROLS 65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082 OPTIONAL LED DOWNLIGHT Ahrendale[™] LED Light Kit 380949 AUB, AVI Etched Cased Opal Glass 17W Dimmable Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K 11.75" Dia. x 5.25" H COORDINATING LIGHTING To see the complete Evan[™] Collection visit Kichler.com.

INCLUDED CONTROLS

Pendant 43328DAG

HANGING MEASUREMENTS


WITH 4.5" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.50"	B: 9.75"	C: 11.75"	D: 6.75"

80

AIR	PERFORM	IANCE
AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt

72

5763









Pendant 43327DAG



65" Eads" Patio XL



Blades (4) Included - 14° Pitch - 65" Sweep - Non-reversible - ABS **Downrods** 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 34.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.87 on High RPM 139 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS



LIMITED FUNCTION 371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Andover Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"	↓.⊂

AIR	PERFORM	IANCE
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
8130	101	81



BLADE SPECS





$52^{\prime\prime} \;\; \mathsf{Eads}^{\scriptscriptstyle \rm T} \mathsf{Patio}$



Blades (4) Included - 14° Pitch - 52" Sweep - Non-reversible - ABS **Downrods** 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 25.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.66 on High RPM 201 on High Energy Star® No



- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS 65K WALL CONTROL

SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Andover Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"	↓↓.⊂

AIR	PERFORM	IANCE
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5904	78	76



BLADE SPECS





65" Maor Patio LED



310136DBK Distressed Black Finish Distressed Black Blades Etched Cased Opal Glass



310136WZC Weathered Zinc Finish Weathered Zinc Blades Etched Cased Opal Glass

Blades (4) Included

- 13° Pitch
- 65" Sweep
- Non-reversible
- Aluminum

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 38.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC Amps 0.72 on High RPM 132 on High Energy Star® No




PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082




WZC

HANGING MEASUREMENTS

	WITH 4.5'	DOWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.50"	B: 12.00"	C: 13.00"	D: 6.75"	

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
8093	90	90		





Shown: 300114OZ Olde Bronze[®] Finish, Light Umber Etched Glass, with Walnut Blades

52" Hendrik[™]



Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" and 12" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 40W, B10 Lamps 4063CLR

Downlight Glass Satin Etched Cased Opal, Light Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control CoolTouch[™] Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 25.1 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.57 on High RPM 170 on High Energy Star® No


4415

67

INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -FULL FUNCTION - 3 Forward Spee

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming



WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)

COORDINATING LIGHTING


To see the complete Hendrik[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4" DOWNROD						
Fixture Drop (from ceiling)			Ceiling Canopy (width)			
A: 16.50"	B: 10.50"	C: 12.25"	D: 6.00"			
	12"	DOWNROD				
Fixture DropBlade DropHousing(from ceiling)(from ceiling)(width)		Ceiling Canopy (width)				
A: 24.50"	B: 18.50" C: 12.25"		D: 6.00"			
AIR						
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt				

65







BLADE SPECS



$52^{\prime\prime} \; \text{Logan}^{\scriptscriptstyle \rm T}$



Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 40W Krypton/T3 Lamps, 5907FST

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 15mm, AC Amps 0.53 on High RPM 140 on High Energy Star[®] No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082





BLADE SPECS

(Reversible)


Blade Finish & Part Number

(Side 1)

HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.75"	B: 10.75"	C: 10.75"	D: 6.50"	

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
4282	62	69			





Shown: 300457AP Antique Pewter Finish, Etched Cased Opal Glass, with Black Cherry Blades

$52^{\prime\prime} \; \text{Leeds}^{\rm T} \text{LeD}$



3004570BB Oil Brushed Bronze[™] Finish Cherry Blades Etched Cased Opal Glass 300457NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass

Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 25.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 189 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Joelson[™] Collection

visit Kichler.com. Ceiling Lighting 43926OZ Chandelier 43923OZ Mini Pendant 43927NI

D

HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.00"	B: 13.00"	C: 10.25"	D: 6.25"	

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
6326	70	90			



BLADE SPECS





 $52^{\prime\prime} \;\; \mathsf{Carlson}^{\scriptscriptstyle \rm T} \mathsf{LED}$



Fan Finish

AP

Pewte

OLZ

Oiled Bronze

BLADE SPECS

(Reversible)

Black

Cherry FB300238 AP

Dark

Cherry FB300238

OLZ

Blade Finish & Part Number

(Side 1)

Light

Cherry FB300238 AP

Medium

Cherry FB300238

OLZ

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 29.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.60 on High RPM 183 on High Energy Star® No

INCLUDED CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Circolo[™] Collection visit Kichler.com.




HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.50"	B: 11.50"	C: 12.00"	D: 6.25"	

AIR	PERFORM	IANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
6195	71	88







Shown: 300018OBB Oil Brushed Bronze[™] Finish, Fresnel Lens, with Cherry Blades



Blades (5) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E12, 40W Krypton/T3 Lamps, 5907FST

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included. *Note: Décor trim must be removed for Flush Mount.*

Control CoolTouch[™] Control System - Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 33 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.69 on High RPM 146 on High Energy Star[®] No

INCLUDED CONTROLS

COOLTOUCH[™] CONTROL SYSTEM - FULL FUNCTION

- 3 Forward Speeds & Motor Off
 - Manual Reverse
 - Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -FULL FUNCTION 370038 (Shown)

COORDINATING LIGHTING

To see the complete Hatteras Bay[™] Collection visit Kichler.com.



B



HANGING MEASUREMENTS

WITH 12" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 22.50"	B: 18.50"	C: 15.25"	D: 6.75"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 11.25"	B: 7.25"	C: 15.25"	D: 6.75"

AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
6124	82	75			

↓ <u>↓</u>	2	5	

AIR PERFORMANCE (FLUSH)				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5470	82	67		

 ${\it Shown: {\bf 310117WZC}}\ {\it Weathered}\ {\it Zinc}\ {\it Finish}, {\it Fresnel}\ {\it Lens}, {\it with}\ {\it Dark}\ {\it Walnut}\ {\it Blades}$

60" Hatteras Bay[™] Patio



Blades (5) Included

- 12° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E12, 40W B10 Lamps, 4063CLR

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included

Control Wall Control - Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 32.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.60 on High RPM 157 on High Energy Star® No



WALL CONTROL -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009 (Shown)

COORDINATING LIGHTING

To see the complete Hatteras Bay[™] Collection visit Kichler.com.





HANGING MEASUREMENTS

Ceiling Canopy (width)


D: 6.75"

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Ceiling Canopy (width)				
A: 17.50"	B: 13.00"	C: 15.50"	D: 6.75"		

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing
(from ceiling)	(from ceiling)	(width)
A: 12.25"	B: 7.75"	C: 15.50"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6282	71	88	



D





BEAUTIFUL CEILING FAN, SLEEK DESIGN



f This fan is absolutely stunning. Easy to install. Sleek design. Definitely a wonderful addition to our home. I absolutely love the wall features.

- Cass | Williston, ND



44[™] Hatteras Bay[™] Patio





Fresnel Lens

BLADE SPECS

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 44" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E12, 40W Krypton/T3 Lamps, 5907FST

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included. Note: Décor trim must be removed for Flush Mount.

Control CoolTouch[™] Transmitter -Full Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 24.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.45 on High RPM 217 on High Energy Star® No

INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -**FULL FUNCTION** 370038MULTR (Shown)

COORDINATING LIGHTING

To see the complete Hatteras Bay[™] Collection visit Kichler.com.





HANGING MEASUREMENTS

	WITH 12" [OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	ÎÎ A B
A: 22.50"	B: 18.50"	C: 14.00"	D: 6.75"	· . .

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 11.25"	B: 7.25"	C: 14.00"	D: 6.75"

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4025	53	76		

↑ ↑ A B	c ⊨
	-Sz
•	

|←D→|



AIR PERFORMANCE (FLUSH)

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3604	53	68





$54^{\prime\prime}~\text{Seaside}^{\scriptscriptstyle\rm T}\text{LED}$



Blades (4) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 35.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.50 on High RPM 167 on High Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH

COORDINATING LIGHTING


To see the complete Seaside[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 6" D	OWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ A 	↑ B 	¢⊦
A: 20.00"	B: 10.50"	C: 15.00"	D: 6.25"			\supset

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5564	60	93		



BLADE SPECS





$52^{\prime\prime}~{\rm Kittery~Point}^{\rm T}$



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" and 12" Downrod with 1" (O.D.) Note: Décor trim must be removed for use with 6" downrod.

Downlight Replaceable. Includes (4) E12, 40W,Krypton/T3 Lamps, 5907FST

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314. Note: Décor trim must be removed for use with Flush Mount.

Control CoolTouch[™] Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 31.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 15mm, AC Amps 0.52 on High RPM 167 on High Energy Star[®] No

Watts on High

(Excludes

Lights)

62

Per Minute

on High

4664

INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

FULL FUNCTION 370038MULTR (Shown)

WALL TRANSMITTER -

COORDINATING LIGHTING

To see the complete Kittery Point[™] Collection visit Kichler.com.



Pendant 42437AP


HANGING MEASUREMENTS

WITH 6" DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling		Ceiling Canopy (width)		
A: 18.25"	B: 11.75"	C: 16.25"	D: 6.00"		
	WITH 12	" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling		Ceiling Canopy (width)		
A: 24.25"	B: 17.75"	C: 16.25"	D: 6.00"		
AIR P					
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY					

Cubic Ft.

Per Minute Per Watt

75







Shown: 300008BKZ Berkshire Bronze Tinish, Umber Etched Marble Glass, with Dark Cherry Blades

60" Kimberley™



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Solid Wood

Downrods 6" and 12" Downrod with 1" (O.D.) Note: Décor trim must be removed for use with 6" downrod.

Downlight Replaceable. Includes (3) E12, 40W B8 Lamps, 4062CLR

Downlight Glass Umber Etched Marble

Optional Downlight N/A

Uplight Includes (6) E12, 15W, C7 4069CLR

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch[™] Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 34.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.72 on High RPM 154 on High Energy Star[®] No

INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
 - Manual Reverse - Lights On/Off with Full-
 - Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -FULL FUNCTION 370038MULTR (Shown)

COORDINATING LIGHTING

To see the complete Camerena[™] Collection visit Kichler.com.



HANGING MEASUREMENTS


WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19.50"	B: 12.00"	C: 15.25"	D: 5.50"

WITH 12" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 25.50"	B: 18.00"	C: 15.25"	D: 5.50"

AIR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6179	85	73



BLADE SPECS





52" Cortez



(Sold Separately)

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" and 12" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight Bowl Light Fixture 380007 AW or TZ

Uplight Includes (7) E12, 15W, C7 Lamps

Uplight Glass White Marble, Sunrise Marble

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 28 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.54 on High RPM 173 on High Energy Star[®] No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS



OPTIONAL DOWNLIGHT



Bowl Light Fixture 380007 AW, TZ White Marble Glass (AW) Sunrise Marble Glass (TZ) 4-Way Light Switch Includes (3) E12, 40W B8 Lamps, 4062CLR 12.00" Dia. x 5.50" H


HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.50"	B: 11.50"	C: 15.00"	D: 6.00"

WITH 12" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 21.50"	B: 19.50"	C: 15.00"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5485	63	87	









70" Monarch[™] Patio



310206WCP Weathered Copper Finish Brown Blades **310206WSP** Weathered Steel Finish Weathered White Walnut Blades

Blades (5) Included - 16° Pitch - 70" Sweep - Non-reversible - ABS **Downrods** 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 30.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.78 on High RPM 122 on High Energy Star® No



WALL TRANSMITTER -FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -FULL FUNCTION 337009WHTR (Shown)

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) Weathered White Walnut FB310206 MWH MWH Matte White WCP Brown FB310206 WCP Veathered Copper Veathere White **Walnut** B310200


HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.25"	B: 16.25"	C: 15.00"	D: 6.75"	

AIR PERFORMANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
8398	94	89







70" Monarch[™]



3002060BB Oil Brushed Bronze[™] Finish Cherry Blades







Blades (5) Included - 16° Pitch - 70" Sweep - Reversible - Wood Downrods 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 30.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.80 on High RPM 128 on High Energy Star® No



INCLUDED CONTROLS

WALL TRANSMITTER -FULL FUNCTION - 3 Forward Speeds &

- Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

FULL FUNCTION 337009WHTR (Shown)

COORDINATING LIGHTING

To see the complete Missoula™ Collection visit Kichler.com.



OPTIONAL BLADE SET




371050 Weathered White Walnut Solid Wood Blades

HANGING MEASUREMENTS

WITH 6" DOWNROD				-
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.00"	B: 16.25"	C: 15.00"	D: 6.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High Lights) Per Watts on High Lights) AIRFLOW EFFICIENCY Cubic Ft. Per Minute Lights) Per Watt			
9411 97 97			



BLADE SPECS





Shown: 339413OZ Olde Bronze[®] Finish, Satin Etched Glass, with Walnut Blades

52" Monarch[™] II Select LED

339413BAP7 Burnished Antique Pewter Finish Weathered White Walnut Blades Satin Etched Glass



BLADE SPECS

(Reversible)

Black

Cherry FB339413

BAP7

Walnut

FB339413

OBB

Walnut

FB339413

ΟZ

Fan Finish

BAP7

Burnished Antique Pewter

OBB

Oil Brushed

Bronze[®]

ΟZ

Olde

Bronze®

Blade Finish & Part Number

(Side 1)

Veathered White Walnut

B339413 BAP7

Cherry FB339413

OBB

Cherry FB339413

ΟZ

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) B10, 4W LED Lamps

Downlight Glass Satin Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control CoolTouch[™] Transmitter - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.68 on High RPM 163 on High Energy Star° No

INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION 370039MULTR (Shown)

COORDINATING LIGHTING

To see the complete Missoula[™] Collection visit Kichler.com.




Pendant 78200AP

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19"	B: 12.00"	C: 13.75"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5472	81	68	





Shown: 339013OBB Oil Brushed Bronze[™] Finish with Walnut Blades

$52^{\prime\prime}~{\rm Monarch}^{\rm T}{\rm II}$



339013TZ Tannery Bronze[™] Finish Teak Blades



Weathered White Walnut Blades

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control CoolTouch[™] Transmitter - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.63 on High RPM 176 on High Energy Star® No



INCLUDED CONTROLS

COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse - Lights On/Off with Full-
- Range Dimming

OPTIONAL CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION 370039MULTR (Shown)


Blade Finish & Part Number Fan Finish (Side 1) (Reversible) OBB **Cherry** FB339013 Walnut Oil Brushed FB339013 Bronze™ OBB OBB **BAP7** Burnished Antique Pewter Veathered White Walnut FB339013 BAP7 Dark Cherry FB339013 BAP7 Dark ΤZ Cherry FB339013 Teak Tannery FB339013 Bronze ΤZ

BLADE SPECS

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Ceiling Canopy (width)		
A: 13.25"	B: 12.75"	C: 13.75"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4889	73	67	





Shown: 310103DBK Distressed Black Finish with Walnut Blades

$52^{\prime\prime} \;\; {\sf Monarch}^{\rm \tiny T} \; {\sf II} \; {\sf Patio}$



310103WCP Weathered Copper Finish Medium Walnut Blades



310103WZC Weathered Zinc Finish Weathered White Walnut Blades

Fan Finish

DBK

Distressed

Black

WCP

Weathered

Copper

WZC

Weathered

BLADE SPECS

(Reversible)

Walnut

Shadowed

FB310103

DBK

Dark

Walnut

FB310103

WCP

Blade Finish & Part Number

(Side 1)

Walnut

FB310103

DBK

Medium

Walnut

FB310103

WCP

/eathere

White Valnut

B31010 WZC

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314


Control CoolTouch[™] Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 25.9 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.68 on High RPM 163 on High Energy Star® No



COORDINATING LIGHTING

To see the complete Springfield Collection visit Kichler.com.



В

D

HANGING MEASUREMENTS

	WITH 4"	DOWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 14.50"	B: 12.75"	C: 13.75"	D: 6.75"	ļ


AIR PERFORMANCE				
IRFLOW	POWER	AIRFLOW		
Cubic Et	LICACE	EEEICIENCV		

۸

IONER	
USAGE	EFFICIENCY
Watts on High	Cubic Ft.
(Excludes	Per Minute
Lights)	Per Watt
82	68
0L	00
	Watts on High (Excludes



INCLUDED CONTROLS



370039MULTR (Shown)



60" Surrey CLIMATES™



Satin Black Finish Satin Black Blades 300250MWH

Matte White Finish Matte White Blades

Blades (4) Included - 13° Pitch - 60" Sweep - Non-reversible - ABS **Downrods** 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Wet Hanging Weight 30.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES


Motor Size/Type 172mm X 20mm, AC Amps 0.55 on High RPM 165 on High Energy Star® No




HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD			←D
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B 	c -
A: 14.00"	B: 11.50"	C: 9.00"	D: 6.50"		_>Z

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6246	65	96	









Shown: 330002OZ Olde Bronze[®] Finish, Etched Cased Opal Glass, with Walnut Blades

52" Vassar LED



330002NI Brushed Nickel Finish Silver Blades Etched Cased Opal Glass 330002WH White Finish White Blades Etched Cased Opal Glass

Blades (3) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 17.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.52 on High RPM 182 on High Energy Star® No

INCLUDED CONTROLS

WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.



Α В



HANGING MEASUREMENTS

WITH 4.5" DOWNROD					
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
	A: 15.00"	B: 11.00"	C: 8.75"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4811	59	81	



D







Shown: 310360WN Walnut Finish, Frosted White Polycarbonate Lens, with Walnut Blades

60" Jace[™] LED



310360WH White Finish White Blades Frosted White Polycarbonate Lens



Fan Finish

INCLUDED FEATURES

Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Frosted White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cETL Listed Damp Hanging Weight 21.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 15mm, AC Amps 0.60 on High RPM 156 on High Energy Star® No

INCLUDED CONTROLS		BLADE	SPE
N	65K WALL CONTROL - FULL FUNCTION	Blade Finish & Part (Side 1) (Rev	Number ersible)
	 - 3 Forward Speeds, Reverse & Motor Off - Lights On/Off with Full- Range Dimming - Faceplates Included in 3 Colors 	Walnut FB310360 WN	
OP	TIONAL CONTROLS	Satin	
	65K COOLTOUCH [™] TRANSMITTER - FULL FUNCTION	Black FB310360 SBK	
Ý	370006 (Shown)	White FB310360	(
	METAL CAPS	WH	
Includes a non-light	a metal fixture cap for use.	Bamboo	(
		FB310360 WH1	



WN SBK Satin Black WH White WH1 White

LADE SPECS

HANGING MEASUREMENTS

WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 15.25"	B: 13.00"	C: 9.00"	D: 6.75"	


Per Watt

81

AIR PERFORMANCE					
AIRFLOW POWER AIRFL					
Cubic Ft.	USAGE	EFFICIENCY			
Per Minute	Watts on High	Cubic Ft.			
on High	on High (Excludes Per Minute				

Lights) 72

5797







Shown: 330001BSS Brushed Stainless Steel Finish, Etched Cased Opal Glass, with Silver Blades

$54^{\prime\prime}~{\rm Geno}^{\rm T}{\rm LED}$



330001MWH Matte White Finish Matte White Blades Etched Cased Opal Glass



3300010Z Olde Bronze[®] Finish Cherry Blades Etched Cased Opal Glass

Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Handheld Control System - Basic

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.67 on High RPM 157 on High Energy Star[®] No



HANDHELD CONTROL SYSTEM - BASIC

- 3 Forward Speeds & Motor Off
- Manual Reverse
 Lights On/Off with Full-Range Dimming


OPTIONAL CONTROLS

WALL TRANSMITTER -LIMITED FUNCTION 370039MULTR (Shown)



HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.50"	B: 10.50"	C: 11.00"	D: 6.25"	



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5147	80	65	

LED



Shown: 3300000Z Olde Bronze[®] Finish, Etched Cased Opal Glass, with Walnut Blades

$52^{\prime\prime} \text{ Lucian}^{\rm T} \text{LED}$



330000NI Brushed Nickel Finish Walnut Blades Etched Cased Opal Glass And the second s

Fan Finish

NI

Brushed

Nickel

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 21.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.60 on High RPM 155 on High Energy Star® No

INCLUDED CONTROLS

WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.





HANGING MEASUREMENTS

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 10.25"	C: 7.50"	D: 6.00"	

Per Minute

Per Watt

75

AIR PERFORMANCE				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW		
Per Minute	Watts on High	Cubic Ft.		

(Excludes

Lights)

72

on High

5356

	←D→
1 1	
AB	C⊣∽⊐→∣
+	\Box

- -



(Side 1)

Blade Finish & Part Number




BLADE SPECS

(Reversible)



Shown: 330180PN Polished Nickel Finish, Etched Cased Opal Glass, with Silver Blades

60" Starkk[™] LED

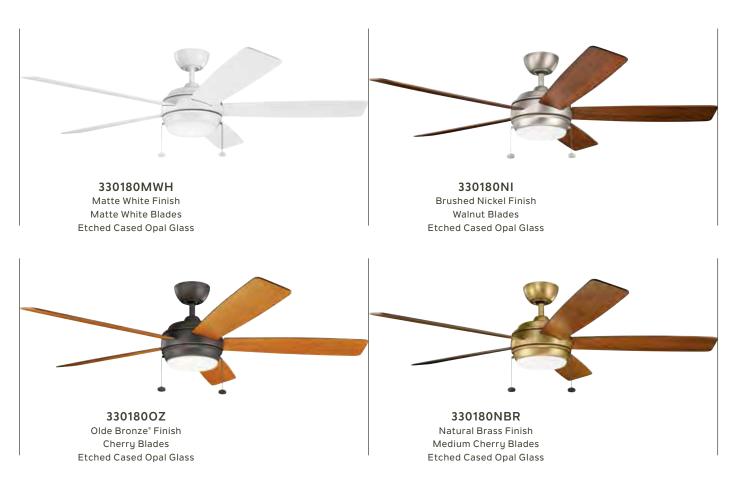

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 26.3 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.60 on High RPM 113 on High Energy Star® No

PULL CH - 3 Speed - 3 Forwa - Manual	s rd & Reverse	
OP	TIONAL CO	NTROLS
12.01	65K WALL CO SYSTEM - LIN	

SYSTE FUNCTION 371042MUL (Shown) 371082WH

INCLUDED CONTROLS




HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5476	72	76	

E









Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 26.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.46 on High RPM 135 on High Energy Star® No



65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH

INCLUDED CONTROLS

PULL CHAIN


- Manual Reverse

- 3 Speeds




WITH 4.5" DOWNROD				_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	4
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	

AIR PERFORMANCE							
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt					
4051	54	75					





42" Starkk[™] LED 330171NI 330171NBR Brushed Nickel Finish Natural Brass Finish Medium Cherry Blades Silver Blades Etched Cased Opal Glass Etched Cased Opal Glass 330171PN 330171MWH Polished Nickel Finish Matte White Finish Silver Blades Matte White Blades Etched Cased Opal Glass Etched Cased Opal Glass



Blades (5) Included

- 12° Pitch
- 42" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 26.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC Amps 0.39 on High RPM 215 on High Energy Star® No



65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH

INCLUDED CONTROLS

PULL CHAIN

- Manual Reverse

- 3 Speeds



HANGING MEASUREMENTS

	WITH 4.5" DOWNROD								
Fixture DropBlade Drop(from ceiling)(from ceiling)			Housing (width)	Ceiling Canopy (width)	1				
	A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"					

74

AIR PERFORMANCE							
AIRFLOW	POWER	AIRFLOW					
Cubic Ft.	USAGE	EFFICIENCY					
Per Minute	Watts on High	Cubic Ft.					
on High	(Excludes	Per Minute					
	Lights)	Per Watt					

47

3482



D


Α В





52" Starkk[™]



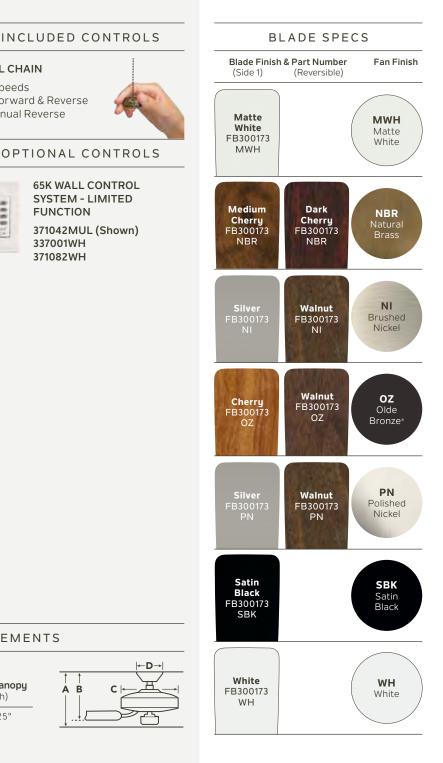



- Tony4x4 | Strongsville, OH

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) E11, 75W JD Lamp, 5910CLR

Downlight Glass Satin Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 26.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.46 on High RPM 136 on High Energy Star® No

HANGING MEASUREMENTS

PULL CHAIN

- 3 Forward & Reverse

65K WALL CONTROL

SYSTEM - LIMITED

371042MUL (Shown)

FUNCTION

337001WH

371082WH

- Manual Reverse

- 3 Speeds

WITH 4.5" DOWNROD							
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A B			
A: 14.00"	B: 10.00"	C: 10.75"	D: 6.25"	↓↓			

AIR PERFORMANCE						
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt				
3982	54	74				



52" Tess



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 26.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.51 on High RPM 175 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS





BLADE SPECS

HANGING MEASUREMENTS

WITH 4.5" DOWNROD										
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)							
A: 12.75"	B: 11.00"	C: 9.75"	D: 5.75"							

AIR PERFORMANCE	
-----------------	--

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5279	61	87



A B

D



60" Kevlar[™] CLIMATES[™]



310150MWH Matte White Finish Matte White Blades



310150WSP Weathered Steel Finish Satin Black Blades

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 26.2 lbs. Body Material Aluminum Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.63 on High RPM 142 on High Energy Star[®] No



OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH


- Manual Reverse




HANGING MEASUREMENTS

WITH 4.5" DOWNROD							
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A			
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"				

AIR PERFORMANCE						
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt				
6136	75	82				





CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold, and constant UV exposure.



$42^{\prime\prime} \; \text{Kevlar}^{\,\,} \; \text{CLIMATES}^{\,\,}$



310144MWH Matte White Finish Matte White Blades



Blades (5) Included

- 14° Pitch
- 42" Sweep
- Non-reversible
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 17.9 lbs. Body Material Aluminum Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.40 on High RPM 231 on High Energy Star® No



OPTIONAL CONTROLS

PULL CHAIN

- 3 Speeds

65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH




HANGING MEASUREMENTS

WITH 4.5" DOWNROD								
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	ļ				
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"					

ΑI	R	Ρ	Е	R	F	0	R	Μ	A	Ν	С	Е	

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3535	48	74





CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold, and constant UV exposure.





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 60W B8 Lamps

Downlight Glass White or Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 29.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.56 on High RPM 154 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS






BLADE SPECS

WITH 4.5" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 20.75"	B: 12.50"	C: 12.50"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4972	66	75	






52" Terra



330247BAP Burnished Antique Pewter Finish Weathered White Walnut Blades





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.60 on High RPM 161 on High Energy Star® No



OPTIONAL CONTROLS

INCLUDED CONTROLS

PULL CHAIN

- Manual Reverse


- 3 Speeds

65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 337001WH 371082WH



WITH 4.5" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 12.50"	C: 12.50"	D: 6.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4593	71	65	





60" Bowen



Matte White Blades

Cherry Blades

Blades (5) Included - 14° Pitch - 60" Sweep - Reversible - Wood Downrods 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-323 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 27.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.57 on High RPM 111 on High Energy Star[®] No

INCLUDED CONTROLS PULL CHAIN - 3 Speeds - 3 Forward & Reverse - Manual Reverse OPTIONAL CONTROLS OPTIONAL CONTROLS 65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 337001WH 371082WH

COORDINATING LIGHTING


To see the complete Shailene[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.5" DOWNROD					_
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
	A: 14.25"	B: 11.50"	C: 8.00"	D: 6.00"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5190	67	78	




BLADE SPECS





52" Bowen

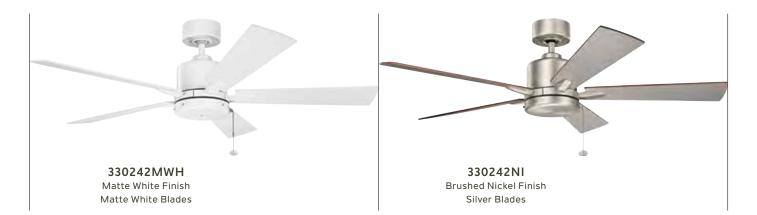

Blades (5) Included - 14° Pitch - 52" Sweep - Reversible - Wood Downrods 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-323 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 25.3 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.55 on High RPM 159 on High Energy Star® No



To see the complete Shailene[™] Collection visit Kichler.com.




BLADE SPECS Blade Finish & Part Number (Side 1) (Reversible) Fan Finish



WITH 4.5" DOWNROD				
Fixture DropBlade DropHousing(from ceiling)(from ceiling)(width)			Ceiling Canopy (width)	
A: 13.75"	B: 11.00"	C: 8.00"	D: 6.00"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes	AIRFLOW EFFICIENCY Cubic Ft. Per Minute	
onnight	Per Watt		
4411	67	66	







Blades (5) Included - 14° Pitch - 42" Sweep - Non-reversible - Wood Downrods 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-323 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 22.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.41 on High RPM 199 on High Energy Star® No




To see the complete Shailene[™] Collection visit Kichler.com.



HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 A
A: 13.75"	B: 11.00"	C: 8.00"	D: 6.00"	ļ

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3402	48	70	









BLADE SPECS



$60^{\prime\prime} \; \text{Canfield}^{\scriptscriptstyle \rm M} \, \text{XL}$

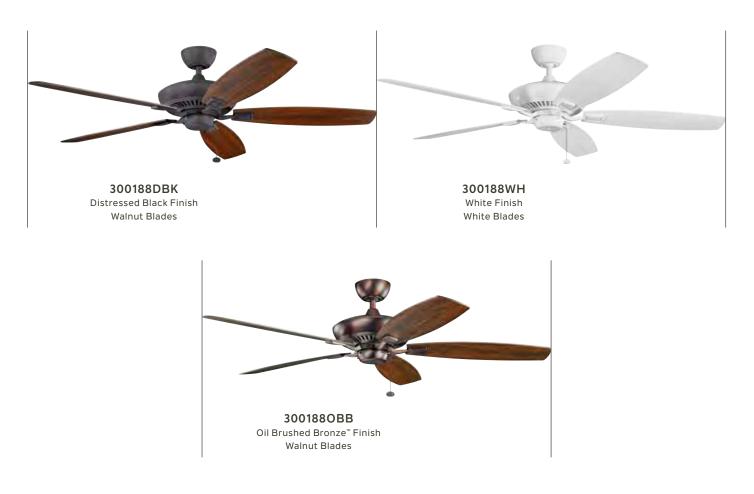

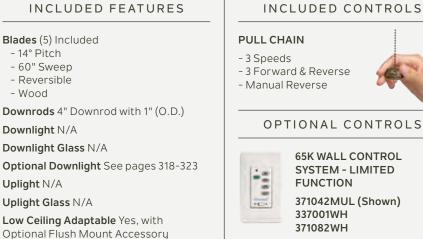

- 14° Pitch

- 60" Sweep

- Reversible

Downlight N/A

Uplight N/A

337008 on page 314 **Control** Pull Chain

Lead Wire 78" cETL Listed Indoor

Hanging Weight 27.8 lbs. Body Material Steel

Amps 0.70 on High RPM 148 on High Energy Star® No

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Warranty www.Kichler.com/Warranty

Motor Size/Type 212mm X 25mm, AC

MOTOR FEATURES

- Wood

OPTIONAL BLADE SET



Weathered White Walnut Solid Wood


371050

Sold separately. See page 329 for more blade options.

BLADE SPECS			
Blade Finish & (Side 1)	Part Number (Reversible)	Fan Finish	
Сherry	Walnut	DBK	
FB300188	FB300188	Distressed	
DBK	DBK	Black	
Cherry	Walnut	NI	
FB300188	FB300188	Brushed	
NI	NI	Nickel	
Cherry	Walnut	OBB	
FB300188	FB300188	Oil Brushed	
OBB	OBB	Bronze ^w	
White FB300188 WH		WH White	

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6785	83	82





$60^{\prime\prime} \;\; {\rm Canfield}^{\rm m} \, {\rm XL} \; {\rm Patio}$



Fan Finish

TZP

Tannery

BLADE SPECS

(Reversible)

Walnut

FB310193

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 29.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC Amps 0.68 on High RPM 167 on High Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse


OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042MUL (Shown) 371082WH





WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6678	81	82





Shown: 330013NI Brushed Nickel Finish, Satin Etched Glass, with Walnut Blades

$52^{\prime\prime} \;\; {\rm Canfield}^{\rm m} \, {\rm Pro} \, {\rm LED}$

330013MWH Matte White Finish Matte White Blades Satin Etched Glass



3300130BB Oil Brushed Bronze[™] Finish Walnut Blades Satin Etched Glass

Fan Finish

NI

Brushed

Nickel

MWH

Matte

White

OBB

Oil Brushed

Bronze™

BLADE SPECS

(Reversible)

Walnut

FB330013

Veathered White Walnut =B330013 MWH

Walnut

FB330013

OBB

Blade Finish & Part Number

(Side 1)

Cherry FB330013

NI

Matte

White

FB330013

MWH

Cherry FB330013

OBB

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Satin Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Wall Control - Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.55 on High RPM 157 on High Energy Star[®] No

-	LIMIT
588 E	- 3 Fo Mot - Mar - Ligh Ran
OP	TION

INCLUDED CONTROLS

WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds &
- Motor Off - Manual Reverse
- Lights On/Off with Full-Range Dimming

PTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER - LIMITED FUNCTION 337214TR (Shown)

OPTIONAL BLADE SETS



371030 Weathered White Walnut Solid Wood




371031 Shadowed Walnut Solid Wood

Sold separately. See page 329 for more blade options.

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.25"	B: 11.00"	C: 12.50"	D: 6.25"

AIR PERFORMANCE	
-----------------	--

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4966	66	76





$52^{\prime\prime} \;\; {\rm Canfield}^{\rm m} \, {\rm Select} \, {\rm LED}$



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 28.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.49 on High RPM 159 on High Energy Star[®] No

AIR PERFORM

POWER

USAGE

Watts on High

(Excludes

Lights)

58

AIRFLOW

Cubic Ft.

Per Minute

on High

5036



HANGING MEASUREMENTS


WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.00"	B: 10.50"	C: 11.00"	D: 6.25"	

ANCE	
AIRFLOW	
Cubic Ft.	

Per Minute

Per Watt

86



LED



$52^{\prime\prime} \;\; {\rm Canfield}^{\rm m}$





PULL CHAIN

- 3 Forward & Reverse

65K WALL CONTROL

LIMITED FUNCTION

371030

Walnut

371031

371042 (Shown)

for more blade options.

SYSTEM -

337001

371082

- Manual Reverse

- 3 Speeds

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES


Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 19.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.54 on High RPM 155 on High Energy Star® No

	WITH 4" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 13.50"	B: 10.75"	C: 12.50"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4868	66	74	





Shown: 320500CMO Coffee Mocha Finish with 370035 Ivory with Walnut Highlights All-Weather ABS Blades

52"/54"/56" Canfield" CLIMATES" Motor Assembly



320500SNW Satin Natural White Finish 371013SNW Satin Natural White All-Weather ABS Blades 380910 SNW Light Kit

12220



256



INCLUDED FEATURES Blades (5) Included - 14° Pitch - Multiple Sweeps - Optional ABS or Wood Downrods 4" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A

Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 19.9 lbs. **Body Material ABS** Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.61 on High RPM 180 on High Energy Star® No

HANGING MEASUREMENTS

WITH 4" DOWNROD				_		←D→
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ A	↑ . B 	c – – –
A: 13.00"	B: 11.25"	C: 12.50"	D: 6.75") S

AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW	

Watt

(E>

73

Per Minute

on High

6231

OWER	AIRFLOW		
SAGE	EFFICIENCY		
s on High	Cubic Ft.		
xcludes	Per Minute		
iahts)	Per Watt		

86





CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold and constant UV exposure.

Kichler.com 257



$52^{\prime\prime} \;\; {\rm Canfield}^{\rm T} \; {\rm Patio}$



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 24.2 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.59 on High RPM 185 on High Energy Star® No



OPTIONAL CONTROLS

INCLUDED CONTROLS

PULL CHAIN

- Manual Reverse

- 3 Speeds

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082




HANGING MEASUREMENTS

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.25"	B: 11.00"	C: 12.50"	D: 6.25"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5481	71	78	





Α



44" Canfield Canfield

Blades (5) Included

- 16° Pitch
- 44" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with **Optional Flush Mount Accessory** 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES


Motor Size/Type 172mm X 20mm, AC Amps 0.53 on High RPM 204 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

SYSTEM -337001 371082




371042 (Shown)



WITH 6" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.00"	B: 12.00"	C: 11.00"	D: 5.50"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4230	61	69	





$30^{\prime\prime} \;\; \text{Canfield}^{\scriptscriptstyle \scriptscriptstyle \!\!\!\scriptscriptstyle M}$

300103WH White Finish White Blades



Blades (5) Included

- 24° Pitch
- 30" Sweep
- Reversible
- UV Coated Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

 $\textbf{Uplight Glass}~\mathsf{N/A}$

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Damp Hanging Weight 14.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC Amps 0.33 on High RPM 232 on High Energy Star[®] No

INCLUDED	CONTROLS
PULL CHAIN	7 0 0 0 0

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082




HANGING MEASUREMENTS

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00"	B: 12.75"	C: 9.75"	D: 6.00"

FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 8.75"	B: 6.50"	C: 9.75"	D: 6.00"

AIR PERFORMANCE AIRFLOW AIRFLOW POWER Cubic Ft. USAGE EFFICIENCY Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 2439 40 61





AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
1491	40	37	



Shown: 3300050BB Oil Brushed Bronze[™] Finish, Satin Etched Glass, with Dark Walnut Blades

$52^{\prime\prime} \; \text{Bentzen}^{\,\,} \, \text{Select LED}$



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. 17W Dimmable Integrated LED Platform, 1,600 Lumens, 80 CRI, 3,000K

Downlight Glass Satin Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Wall Transmitter – Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight N/A Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.53 on High RPM 152 on High Energy Star[®] No

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.75"	B: 11.25"	C: 13.00"	D: 6.75"

AIR	PERF	O R M A	NCE

AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
5284	64	69



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™] TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

BLADE SPECS





A B



52" Bentzen™



Fan Finish

AP

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 314

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 23.1 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.53 on High RPM 152 on High Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS


65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082



OBB

Walnut FB300118 OBB

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 12.75"	B: 11.00"	C: 13.00"	D: 6.50"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5285	64	83	





Fan Finish

AP

Antique Pewter

MWH

Matte

White

OBB

Oil Brushed

Bronze^{**}

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 60W B10 Lamps, 4064CLR

Downlight Glass Satin Etched, Umber Etched, Umber Alabaster or White Alabaster

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A


Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.42 on High RPM 152 on High Energy Star® No

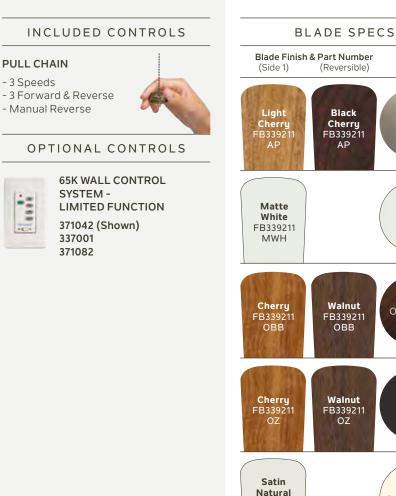

HANGING MEASUREMENTS

PULL CHAIN

- Manual Reverse

SYSTEM -

337001

371082

- 3 Speeds

	WITH 4" D	OWNROD		_
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	A
A: 18.00"	B: 10.75"	C: 12.00"	D: 10.75"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 8.00"	C: 12.00"	D: 5.25"

AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
3832	49	79

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3469	49	71	

В



D

White

FB339211 SNW

οz Olde **Bronze**®

SNW Satin Natural White



52" Sutter Place[™] Premier



Fan Finish

MWH

Matte

White

OBB

Oil Brushed Bronze™

> οz Olde

Bronze®

ΟZ

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 60W B10 Lamps, 4064CLR

Downlight Glass Umber Alabaster, White Alabaster and Satin Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.4 on High RPM 154 on High Energy Star® No

INCLUDED CONTROLS	BLADE	SPECS
L CHAIN	Blade Finish & Part M (Side 1) (Reve	Number ersible)
peeds forward & Reverse anual Reverse	Cherry Ch	ack erry
OPTIONAL CONTROLS		P
65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042 (Shown) 337001 371082	Matte White FB339400 MWH	
	FB339400 FB33	Inut 19400 BB
		Inut 19400

OZ

HANGING MEASUREMENTS

PULL CHAIN

- 3 Forward & Reverse

- Manual Reverse

- 3 Speeds

WITH 4" DOWNROD			
Fixture Drop (from ceiling)Blade Drop (from ceiling)Housing (width)Ceiling Canc (width)			
A: 18.75"	B: 10.75"	C: 12.00"	D: 5.25"

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 8.00"	C: 12.00"	D: 5.25"

AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
3915	48	82

ŀ
]

AIR PERFORMANCE (FLUSH) AIRFLOW AIRFLOW POWER Cubic Ft. USAGE EFFICIENCY Per Minute Cubic Ft. Watts on High Per Minute on High (Excludes Per Watt Lights) 3615 47 76



Shown: 330010NI Brushed Nickel Finish with Nickel Blades

60[™] Motu[™]



The Motu[™] fan blades must be mounted a minimum of 10' from the floor.

Blades (3) Included - 35° Pitch - 60" Sweep - Non-reversible - ABS Downrods 6" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control 4-Speed Fan Slide Control

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 24.0 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.86 on High RPM 261 on High Energy Star[®] No



4-SPEED FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan - For Use with Most
- Ceiling Fans

OPTIONAL CONTROLS




CONTROL - ROTARY 370040 (Shown) 370032

4-SPEED WALL



WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 14.50"	C: 8.75"	D: 5.75"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
10253	100	103	





Shown: 330025BSS Brushed Stainless Steel Finish with Brushed Stainless Steel Blades



The Todo[™] fan blades must be mounted a minimum of 10' from the floor.

INCLUDED FEATURES

Blades (3) Included - 6.5° Pitch - 56" Sweep - Non-reversible - Steel Downrods 8" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control 4-Speed Fan Slide Control

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 18.3 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES


Motor Size/Type 188mm X 20mm, AC Amps 0.79 on High RPM 267 on High Energy Star® No

LUDED CONTROLS	BLAD	E SPECS
4-SPEED FAN		t Number Fan Finish eversible)
 4-Speed Fan Control Faceplate Included Controls One Fan For Use with Most Ceiling Fans 	Brushed Stainless Steel FB330025 BSS	BSS Brushed Stainless Steel
TIONAL CONTROLS		
4-SPEED WALL CONTROL - ROTARY 370040 (Shown) 370032	Satin Black FB330025 SBK	SBK Satin Black
	4-SPEED FAN SLIDE CONTROL - 4-Speed Fan Control - Faceplate Included - Controls One Fan - For Use with Most Ceiling Fans TIONAL CONTROLS 4-SPEED WALL CONTROL - ROTARY 370040 (Shown)	4-SPEED FAN SLIDE CONTROL Blade Finish & Par (Side 1) - 4-Speed Fan Control Faceplate Included - Faceplate Included Stainless Steel - For Use with Most Ceiling Fans Brushed Stainless Steel TIONAL CONTROLS Satin Black FB330025 BSS 4-SPEED WALL CONTROL - ROTARY 370040 (Shown) Satin Black

White WH FB330025 White WH

WITH 8" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00"	B: 12.25"	C: 7.50"	D: 5.25"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
8666	91	95	







$24^{\prime\prime} \,\,_{\text{Pola}^{\scriptscriptstyle \text{M}}}$



339224SINB Satin Natural Bronze Finish Satin Natural Bronze Blades

Blades (3) Included

- 10° Pitch
- 24" Sweep
- Non-reversible
- Steel

Downrods N/A


Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Wall Mount only Lead Wire 6' Cord with GFCI Plug cUL Listed Wet Hanging Weight 37.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES


Motor Size/Type PSC139-640, AC Amps 2.65 on High RPM 1,075 on High Energy Star® No



PULL CHAIN


- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse





HANGING MEASUREMENTS





Overall Fan Dimensions



6"



Wall Bracket Dimensions Mounting Bracket

1.87"



18[™] Pola[™]



Brushed Nickel Finish Nickel Blades

Blades (3) Included

- 10° Pitch
- 18" Sweep
- Non-reversible
- Steel

Downrods N/A

Downlight N/A Downlight Glass N/A Optional Downlight N/A Uplight N/A Uplight Glass N/A Low Ceiling Adaptable No Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Wall Mount only Lead Wire 6' Cord with GFCI Plug cUL Listed Wet Hanging Weight 25.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES


Motor Size/Type PSC127-625C, AC Amps 2 on High RPM 1,100 on High Energy Star® No



PULL CHAIN


- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse





HANGING MEASUREMENTS





Overall Fan Dimensions



Wall Bracket Dimensions Mounting Bracket

8.6

1.87"



52" Stratmoor



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323 Uplight N/A

Uplight Glass N/A Low Ceiling Adaptable Flush Mount only Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 12" cUL Listed Indoor Hanging Weight 14.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.48 on High RPM 153 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS


65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082





FLUSH MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 8.25"	B: 6.75"	C: 11.50"	D: 11.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
2511	54	46	





42" Stratmoor



Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 42" Sweep
- Reversible
- Wood

 $\textbf{Downrods} \; N/A$

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323 Uplight N/A

Uplight Glass N/A Low Ceiling Adaptable Flush Mount only Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only Lead Wire 12" cUL Listed Indoor Hanging Weight 12.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC Amps 0.47 on High RPM 224 on High Energy Star® No



PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082







BLADE SPECS

FLUSH MOUNT				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 8.25"	B: 6.50"	C: 9.25"	D: 8.75"	

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
2981	57	52	





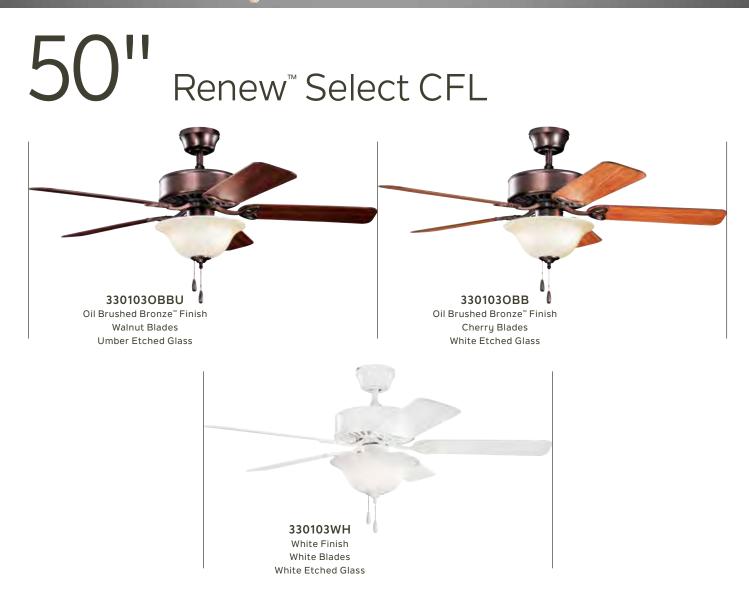

S

Blades (5) Included

- 12° Pitch
- 50" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (2) E26, 13W, Non-Dimmable CFL Lamps

Downlight Glass White or Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 27.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.58 on High RPM 210 on High Energy Star® No



SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082

INCLUDED CONTROLS

PULL CHAIN

- Manual Reverse

- 3 Speeds



HANGING MEASUREMENTS


	WITH 4" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.50"	B: 10.50"	C: 11.00"	D: 6.00"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 7.00"	C: 11.00"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4657	67	69	

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4421	68	65	





50" Renew[™] Select



Blades (5) Included

- 12° Pitch
- 50" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) E12, 40W B10 Lamps

Downlight Glass White Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 27.5 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.60 on High RPM 181 on High Energy Star® No



INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082



HANGING MEASUREMENTS


		WITH 4" D	OWNROD		
Fixture (from c		Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18	.50"	B: 10.50"	C: 11.75"	D: 6.00"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 7.00"	C: 11.75"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4443	69	64	

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4153	70	60	





$52^{\prime\prime}~{\tt Renew}^{\rm T}~{\tt Select~Patio~CFL}$



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (2) E26, 13W, Non-Dimmable CFL Lamps

Downlight Glass Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Wet Hanging Weight 15.7 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.59 on High RPM 179 on High Energy Star® No




PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082

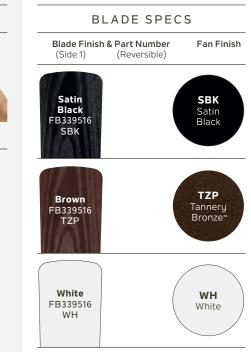

HANGING MEASUREMENTS

AIR P

WITH 4" DOWNROD				
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
	A: 19.25"	B: 11.00"	C: 11.75"	D: 6.00"
	FLUSH MOUNT			
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
	A: 15.75"	B: 7.75"	C: 11.75"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5409	68	80	

- •		N			
ER	ERFORMANCE (FLUSH)				
)W	POWER	AIRFLOW			

D

AIRFLOW	POWER	AIRFLOW
Cubic Ft.	USAGE	EFFICIENCY
Per Minute	Watts on High	Cubic Ft.
on High	(Excludes	Per Minute
	Lights)	Per Watt
4584	67	68

В





Blades (5) Included

- 12° Pitch
- 50" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E26, 13W, Non-Dimmable CFL Lamps

Downlight Glass White or Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 20.8 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.6 on High RPM 184 on High Energy Star® No



65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082

PULL CHAIN

- 3 Speeds



HANGING MEASUREMENTS

WITH 4" DOWNROD						
	Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	↑ ↑ A B 	¢⊬
	A: 19.25"	B: 10.50"	C: 11.75"	D: 6.00"	· ↓↓.⊂	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.75"	B: 7.00"	C: 11.75"	D: 6.00"


AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4438	69	64	

AIR PERFORMANCE (FLUSH)				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4061	70	58		

	←D→
1	
B	
ŧ.C	—) 子



50" Renew[™]

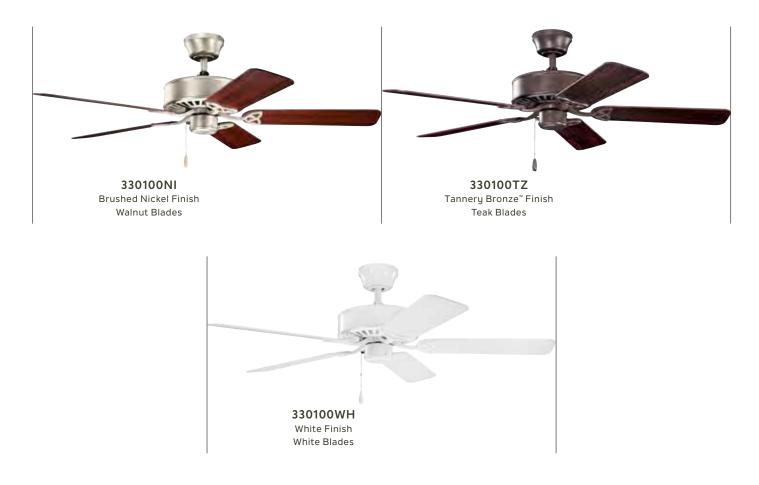

Blades (5) Included

- 12° Pitch
- 50" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 25.3 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.58 on High RPM 210 on High Energy Star® No



371042 (Shown) 337001 371082

PULL CHAIN

- 3 Speeds

INCLUDED CONTROLS



HANGING MEASUREMENTS

A

A P

4417

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 12.75"	B: 10.50"	C: 11.75"	D: 6.00"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.25"	B: 7.00"	C: 11.75"	D: 6.00"

AIR PERFORMANCE

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4596	66	69

6.00"		
IR PER	FORMANC	E (FLUSH)
IRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt

67

	←D→
1 1	
AB	C⊣→
↓.⊂) P

66



$52^{\prime\prime} \;\; \mathsf{Renew}^{\scriptscriptstyle \rm M} \; \mathsf{Patio}$



Blades (5) Included - 12° Pitch - 52" Sweep - Non-reversible - ABS Downrods 4" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Wet Hanging Weight 23.1lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.57 on High RPM 202 on High Energy Star[®] No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082



HANGING MEASUREMENTS

WITH 4" DOWNROD				
Fixture Drop (from ceiling) Blade Drop (from ceiling) Housing (width) Ceiling Canopy (width)				
A: 12.25"	B: 10.00"	C: 11.75"	D: 6.00"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canop
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.25"	B: 6.75"	C: 11.75"	D: 6.00"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4870	67	73	

	←D→
1 1	
AB	
↓ <u>↓</u>) P



AIR PER	AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4584	68	68		



$52^{\prime\prime} ~\text{Enduro}^{\rm T}~\text{CLIMATES}^{\rm T}$



310145MWH Matte White Finish Matte White Blades



Blades (5) Included - 12° Pitch - 52" Sweep - Non-reversible - ABS Downrods 4.5" Downrod with 1" (O.D.) Downlight N/A Downlight Glass N/A Optional Downlight See pages 318-320 Uplight N/A Uplight Glass N/A Low Ceiling Adaptable Yes, Low Ceiling Adaptable **Control** Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12 Lead Wire 78" cUL Listed Wet Hanging Weight 19 lbs. **Body Material ABS** Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC Amps 0.55 on High RPM 205 on High Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS

65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 371082





HANGING MEASUREMENTS

	WITH 4.5"	DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	 A B 	⊦ C
A: 14.25"	B: 11.75"	C: 12.50"	D: 5.75"		\supset

AIR PERFORMANCE				
AIRFLOW	POWER	AIRFLOW		
Cubic Ft.	USAGE	EFFICIENC		

AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
5116	65	79






CLIMATES[™]-grade fans are built with impressive corrosion-resistant materials to withstand harsh outdoor elements: extreme heat, saltwater spray, intense cold and constant UV exposure.



52" Basics Select 403SNB 403WH Satin Natural Bronze Finish White Finish White Blades Teak Blades White Etched Glass White Etched Glass 403SBK Satin Black Finish Satin Black Blades White Etched Glass

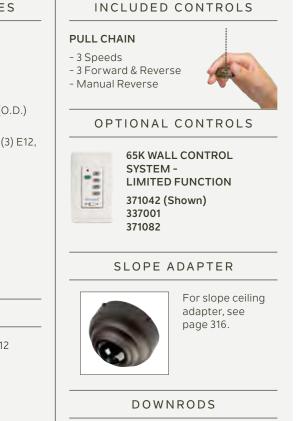

For Basics 400 Series Non-Threaded Downrods, see page 316.

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight Replaceable. Includes (3) E12, 40W B10 Lamps, 4063CLR

Downlight Glass White Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 16.4 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC Amps 0.51 on High RPM 167 on High Energy Star® No



HANGING MEASUREMENTS

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 17.75"	B: 10.50"	C: 11.00"	D: 5.25"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.50"	B: 7.00"	C: 11.00"	D: 5.25"

AIR PERFORMANCE

AIRFLOW	POWER	AIRFLOW
Cubic Ft. Per Minute	USAGE Watts on High	EFFICIENCY Cubic Ft.
on High	(Excludes Lights)	Per Minute Per Watt
3893	62	63

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes	AIRFLOW EFFICIENCY Cubic Ft. Per Minute
5	Lights)	Per Watt
3169	62	51

BLADE SPECS





Shown: 402SNB Satin Natural Bronze Finish, White Etched Glass, with Dark Cherry Blades





Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight Replaceable. Includes (4) E12, 40W B10 Lamps, 4063CLR

Downlight Glass White Etched, **Clear Seeded**

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 17.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC Amps 0.5 on High RPM 160 on High Energy Star® No

HANGING MEASUREMENTS

PULL CHAIN

- 3 Forward & Reverse

SYSTEM -

337001

371082

Downrods, see page 316.

371042 (Shown)

- Manual Reverse

- 3 Speeds

WITH 4" DOWNROD			<u> </u>		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	Î Î A B 	c 🔁
A: 17.75"	B: 10.50"	C: 11.00"	D: 5.25"		\supset

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.00"	B: 7.00"	C: 11.00"	D: 5.25"

Per Minute

Per Watt

66

AIR PERFORMANCE AIRFLOW AIRFLOW POWER Cubic Ft. USAGE EFFICIENCY Per Minute Watts on High Cubic Ft.

(Excludes

Lights)

57

on High

3863

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3028	59	52	







D

INCLUDED CONTROLS

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood
- wood

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-323

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included


Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Indoor Hanging Weight 14 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC Amps 0.49 on High RPM 186 on High Energy Star[®] No

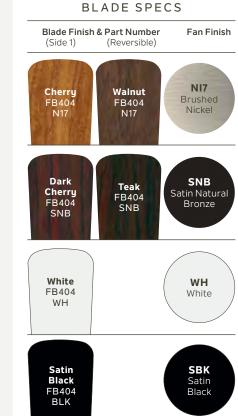

HANGING MEASUREMENTS

	WITH 4" D	OWNROD		
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 12.50"	B: 10.50"	C: 11.00"	D: 5.25"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.25"	B: 7.25"	C: 11.00"	D: 5.25"


AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 3778 57 66

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3350	59	57

A B



52" Basics Patio

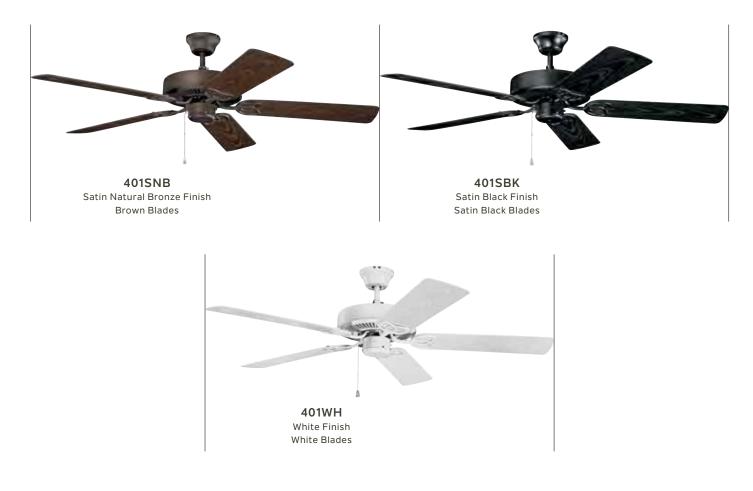

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 15.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 13mm, AC Amps 0.48 on High RPM 178 on High Energy Star® No

PULL CHAIN - 3 Speeds - 3 Forward & Reverse - Manual Reverse			
OPT	IONAL	CONTROLS	
	65K WALL CONTROL SYSTEM - LIMITED FUNCTION 371042 (Shown) 371082		
SLOPE ADAPTER			
6		For slope ceiling adapter, see page 316.	

INCLUDED CONTROLS

DOWNRODS

For Basics 400 Series Non-Threaded Downrods, see page 316.

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) NI Brown Brushed FB401 Nickel NI Satin SBK Black Satin FB401 Black SBK **SNB** Satin Natural Brown FB401 Bronze SNB White WH FB401 White WH

HANGING MEASUREMENTS

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 12.25"	B: 10.25"	C: 11.00"	D: 5.25"

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.00"	B: 7.00"	C: 11.00"	D: 5.25"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4286	56	75

	←D→
1 1	
AB	C⊣→

- -

AIR PER	FORMANC	E (FLUSH)
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4072	57	71



42" Basics Patio





Blades (5) Included

- 12° Pitch
- 42" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 3/4" (O.D.) Non-Threaded

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 318-320

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12 Lead Wire 78" cUL Listed Damp Hanging Weight 17.6 lbs. Body Material Steel Warranty www.Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 10mm, AC Amps 0.42 on High RPM 218 on High Energy Star[®] No

PULL CHAIN - 3 Speeds - 3 Forward & Reverse - Manual Reverse			
OP	TIONAL	CONTROLS	
	SYSTEM	FUNCTION	
	SLOPE /	ADAPTER	
		For slope ceiling adapter, see page 316.	

INCLUDED CONTROLS

DOWNRODS

For Basics 400 Series Non-Threaded Downrods, see page 316.

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) NI Brown Brushed FB414 Nickel NI Satin SBK Black Satin FB414 Black SBK SNB Brown Satin Natural FB414 SNB Bronze White WH FB414 White WΗ

HANGING MEASUREMENTS

	WITH 4" D	OWNROD		-
		Ceiling Canopy (width)		
A: 12.75"	B: 10.25"	C: 10.75"	D: 5.25"	

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.50"	B: 7.00"	C: 10.75"	D: 5.25"

AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3034	49	62

	←D→
1 1	
AB	C⊣→
*	

AIR PERFORMANCE (FLUSH) AIRFLOW AIRFLOW POWER Cubic Ft. USAGE EFFICIENCY Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 2832 49 57











Accessories

Add more versatility to your fan.

Kichler[®] accessories help you enhance the functionality of your fan to suit your lifestyle. Choose from optional wall or remote controls as well as light kits designed with unique features, like integrated LED or Bluetooth[®]-enabled speakers. Many accessories work with Kichler and non-Kichler fans; all feature Kichler quality and performance.





AC Control Systems

			Ċ	
	CoolTouch [™] Handheld Control System – Limited Function	Contro	ch[™] Handheld ol System – Function	Handheld Control System – Basic
Item Number and Finishes	371082 WH (shown)	371085 ALN	1, IV, WH (shown)	337001 WH
Motor Type		AC Moto	or Fans	
Control Type and Function	• 65K Code • 3 Forward Speeds, Motor Off • Manual Reverse	• 65K Code • 3 Forward Spee and Motor Off	ds, Reverse,	 • 16 Frequency Code • 3 Forward Speeds, Motor Off • Manual Reverse
Downlight Control	Lights on/off with full-range dimn On/off only fo) light sources).	Lights on/off with full-range dimming. On/off only for fluorescent. Not recommended for LED light kits.
Receiver	Wet-rated W for indoor Wireless radio frequency ope			Transmitter is Dry-rated for indoor use only.
Compatibility	Replaces any single-wall switch Retrofits most pull chain fans			
Notes	Includes transmitter and canopy-mounted settings. Also includes wall bracket and mo lithium batteries. Transmitter is Dry-rated f Function also available in Almond (ALM) a	unting hardware, p or indoor use only.	lus replaceable long-life . CoolTouch Limited	Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.
Available Transmitter	371062 MULTR 65K Wall Transmitter - Limited Function Almond (ALM), Ivory (IV) or White (WH)	65K Wa Full Ful	d (ALM), Ivory (IV)	-
	Wall Control System – Limite	d Function	Wall Control S	ystem – Full Function
Item Number and Finishes	371042 MUL		37	1045 MUL
Motor Type		AC Moto	or Fans	
Control Type and Function	• 65K Code • 3 Forward Speeds, Motor Off • Manual Reverse		65K Code S Forward Speeds, Reve	erse, and Motor Off
Downlight Control	Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.			rescent.
Receiver	Wet-rated W for indoor/outdoor covered areas			
Notes	Also includes Whit	e,Ivory, and Almor		er with 65,000 code settings. , plus mounting hardware. e only.
Available Transmitter	370005 65K CoolTouch [™] Transmi Limited Function	tter -	370006 65K Co Full Function	olTouch [™] Transmitter -

AC Controls – Transmitter only

	C BREE	6		
	Wall Transmitter – Full Function	CoolTouch[™] Transmitter – Full Function*	Wall Transmitter – Limited Function	CoolTouch [™] Transmitter – Limited Function*
Item Number and Finishes	370038 MULTR	337009 WHTR	370039 MULTR	337214 TR
Motor Type	AC Motor Fans			
Control Type and Function	 • 16 Frequency Code • 3 Forward Speeds, Reverse, and Motor Off 		 • 16 Frequency Code • 3 Forward Speeds, Motor Of • Manual Reverse 	f
Downlight Control		Lights on/off with	full-range dimming	
Receiver	Transmitt	er works with existing system.	*Wireless operational radius of 3	30' or less.
Notes	Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.	Includes wall bracket, mounting hardware and White faceplate.	Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.	Includes wall bracket, mounting hardware and White faceplate.
Accessories	-	370010 ALM (shown) 370010 IV	-	370010 ALM 370010 IV (shown)

AC Controls – Conversion Kit



	CoolTouch [™] Reversible Conversion Handheld Control System – Full Function			
Item Number	3R200	3R	400	3W500
Finishes	BSS, DBK, MWH, NBR, NI, OBB, SNW, TZ, WH	AP, BSS, MWH, NBR, NI, C	BB, OZ, SGD, SNW, TZ, WH	SBK, TZP, WCP, WH, WSP
For use with Fans:	300117 52" Canfield [™] 330247 52" Terra	300107 44" Canfield [™] 339011 52" Sutter Place	339017 42" Stratmoor 339022 52" Stratmoor	310192 52" Canfield [™] Patio W
Control Function	• 16 Frequency Code • 3 Forward Speeds, Reverse, and Motor Off			
Downlight Control	On/off with full-range dimming and intelligent return for both			
Receiver	Wireless operational radius of 30' or less			
Compatibility	Replaces any single-wall switch or mounts on any flat surface			
Notes	Includes wall bracket and mounting hardware, plus replaceable, long-life lithium batteries. Also includes wall pocket, transmitter, canopy-mounted receiver and reversing wiring harness. Designed exclusively for and intended for use with listed Kichler [®] brand ceiling fans ONLY.			

Accessories



370010 ALM (shown), **IV Single Gang CoolTouch[™] Wallplate** works with any AC or DC CoolTouch[™] Control System



370011 ALM, IV, WH (shown) **Dual Gang CoolTouch[™] Wallplate** works with any AC or DC CoolTouch[™] Control System

AC Wall Controls – Hardwire

	Dual-Slide Control – Fan/Light	4-Speed Slide Control – Fan only	Dimmer Slide Control – Light only
Item Number and Finishes	337010 ALM, IV, WH (shown)	337012 ALM (shown), IV, WH	337011 ALM, IV (shown), WH
Motor Type		AC Motor Fans	
Control Type and Function	 Max 1.25 Amp Fan speed and light control Controls 1 fan and light 	• Max 1.25 Amp • 4-Speed fan control • Controls 1 fan	• Max 600W • Full-range light dimmer • Controls 1 fan light or light fixture
Dimming	Full-range dimming light control	-	Full-range dimming light control
Notes	Includes faceplate. Requires 3 wire + ground installation. For use with most AC ceiling fans.	Includes faceplate. Can be used in dual gang box alongside our Dimmer Slide Control 337011 . For use with most AC ceiling fans.	Includes faceplate. Can be used in dual gang box alongside our 4-Speed Slide Control 337012 . For use with most AC ceiling fans.



O
120
Wall Control

	4-Speed Wall Control – Rotary	4-Speed Wall Control – Rotary		
Item Number and Finishes	370040	370032 MUL		
Motor Type	AC Mot	tor Fans		
Control Type and Function	Max 10 Amp Controls multiple fans on one circuit	• Max 5 Amp • Controls 2 or 3 fans (3 max.)		
Notes	Brushed Aluminum faceplate with black control knob. For use with most AC ceiling fans.	Includes Almond, Ivory, and White faceplates and control knobs. For use with most AC ceiling fans.		

DC Control Systems





	6-Speed DC Wall Transmitter – Full Function	6-Speed DC CoolTouch [™] Transmitter – Full Function
Item Number and Finishes	370036 ALMTR, IVTR, WHTR (shown)	371075 WHTR
Motor Type	DC Mot	or Fans
Control Type and Function		r Fans only everse, and Motor Off
Downlight Control	Lights on/off with f	ull-range dimming
Receiver	Sold set	parately
Notes	Includes White faceplate and mounting harc	lware. No more than two fans on one circuit.
Accessories	_	370010 ALM 370010 IV



Hanger System Accessories







		60° Slope Adapter		Flush Mount Kits		Downrod Coupler	
ltem Number and Finishes		337005 + Finish code		337008 + Finish code		337007 + Finish code	
Features	 Adapts to sloped or vaulted ceilings from 0° to 60° Accepts our CoolTouch[®] Receiver Unit for remote controlled fans Includes "Stabilized" Mounting System with tension feature Safety features prevent fan from "lifting" off mounting system Heavy-duty design features 2 safety pins and 1 screw set for maximum safety 		iit em ing"	 For use with any fan noted as "Low Ceiling Adaptable" Accepts control receiver for remote controlled fans 		Decorative Coupler for 1" (O.D.) extension downrods to achieve desired length	
Dimensions		6.00" Dia. x 4.00" H		6.00" Dia. x 2.75" H		2.00" Dia. x 4.00" H	
Notes	Outd paint • Desig • ONL • Availa • Dowr	gned for indoor or outdoor use. oor finishes are powder coated o ed with a galvanized undercoati gned for use with 1" O.D. downr (able in all Kichler® fan finishes nrod sold separately Patent Pending	or ng ods	Overall fan height reduced by approximate length of downrod removed For use with: 60" Ashbyrn, 52" Bentzen, 52" Bentzen Select LED, 44" Canf 52" Canfield, 52" Canfield Patio, 52" Canfield Pro LED, 52" Canfield Pro LED, 60" Canf XL, 60" Canfield XL Patio, 52" Hen 52" Kittery Point, 52" Monarch II, 52" Monarch II Patio, 52" Monarch II Select, 52" Terra, 52" Terra Select, 52" Tess	ield	For use with dual-threaded downrods only	
				FINISH CODES			
	ANS	Antique Satin Silver	MCH	5	SGE	5	
	AP	Antique Pewter	MDV		SNE		
	AVI	Anvil Iron	MW		SNV		
	AW	Aged White	NBF	R Natural Brass	TZ	Tannery Bronze™	

	1				
AVI	Anvil Iron	MWH	Matte White	SNW	Satin Natural White
AW	Aged White	NBR	Natural Brass	ΤZ	Tannery Bronze™
BAB	Burnished Antique Brass	NI	Brushed Nickel	TZP	Tannery Bronze™
BKZ	Berkshire Bronze™	OBB	Oil Brushed Bronze™	WCP	Weathered Copper
BSS	Brushed Stainless Steel	OLZ	Oiled Bronze	WH	White
СМО	Coffee Mocha	ΟZ	Olde Bronze®	WN	Walnut
DBK	Distressed Black	PN	Polished Nickel	WSP	Weathered Steel
GST	Galvanized Steel	SBK	Satin Black	WZC	Weathered Zinc

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod

All Kichler® ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).

Recommended for fan stability in high wind applications. (For any slope or flat ceiling.)







Dual-Threaded Downrods

	Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft. +
	Suggested Downrod Length	12"	18"	24"	36"	48"	60"	72"
	FINISHES							
0	ANS Antique Satin Silver	360000 ANS	360001 ANS	360002 ANS	360003 ANS	360004 ANS	360005 ANS	360006 ANS
	AP	360000	360001	360002	360003	360004	360005	360006
	Antique Pewter AVI	AP 360000	AP 360001	AP 360002	AP 360003	AP 360004	AP 360005	AP 360006
	Anvil Iron	AVI						
0	AW Aged White	360000 AW	360001 AW	360002 AW	360003 AW	360004 AW	360005 AW	360006 AW
	BAB	360000	360001	360002	360003	360004	360005	360006
	Burnished Antique Brass BKZ	BAB 360000	BAB 360001	BAB 360002	BAB 360003	BAB 360004	BAB 360005	BAB 360006
	Berkshire Bronze™	BKZ						
	BSS Brushed Stainless Steel	360000 BSS	360001 BSS	360002 BSS	360003 BSS	360004 BSS	360005 BSS	360006 BSS
	CMO Coffee Maska	360000	360001	360002	360003	360004	360005	360006
	Coffee Mocha DBK	CMO 360000	CMO 360001	CMO 360002	CMO 360003	CMO 360004	CMO 360005	CMO 360006
	Distressed Black	DBK						
	GST Galvanized Steel	360000 GST	360001 GST	360002 GST	360003 GST	360004 GST	360005 GST	360006 GST
_	MCH	360000	360001	360002	360003	360004	360005	360006
	Midnight Chrome MDW	MCH 360000	MCH 360001	MCH 360002	MCH 360003	MCH 360004	MCH 360005	MCH 360006
	Mediterranean Walnut [™]	MDW						
0	MWH Matte White	360000 MWH	360001 MWH	360002 MWH	360003 MWH	360004 MWH	360005 MWH	360006 MWH
	NBR Natural Brass	360000 NBR	360001	360002	360003 NBR	360004	360005 NBR	360006
1100	Naturar Drass	360000	NBR 360001	NBR 360002	360003	NBR 360004	360005	NBR 360006
	Brushed Nickel	NI 360000	NI 360001	NI 360002	NI 360003	NI 360004	NI 360005	NI 360006
-0	OBB Oil Brushed Bronze [™]	OBB						
	OLZ Oiled Bronze	360000 OLZ	360001 OLZ	360002 OLZ	360003 OLZ	360004 OLZ	360005 OLZ	360006 OLZ
	OZ	360000	360001	360002	360003	360004	360005	360006
	Olde Bronze® PN	OZ 360000	OZ 360001	OZ 360002	OZ 360003	OZ 360004	OZ 360005	OZ 360006
	Polished Nickel	PN						
	SBK Satin Black	360000 SBK	360001 SBK	360002 SBK	360003 SBK	360004 SBK	360005 SBK	360006 SBK
	SGD	360000	360001	360002	360003	360004	360005	360006
	Sterling Gold SNB	SGD 360000	SGD 360001	SGD 360002	SGD 360003	SGD 360004	SGD 360005	SGD 360006
	Satin Natural Bronze	SNB						
0	SNW Satin Natural White	360000 SNW	360001 SNW	360002 SNW	360003 SNW	360004 SNW	360005 SNW	360006 SNW
	TZ	360000	360001	360002	360003	360004	360005	360006
	Tannery Bronze™ TZP	TZ 360000	TZ 360001	TZ 360002	TZ 360003	TZ 360004	TZ 360005	TZ 360006
	Tannery Bronze [™] Powder Coat	TZP						
•	WCP Weathered Copper	360000 WCP	360001 WCP	360002 WCP	360003 WCP	360004 WCP	360005 WCP	360006 WCP
•	White	360000	360001	360002	360003	360004	360005	360006
	White WN	WH 360000	WH 360001	WH 360002	WH 360003	WH 360004	WH 360005	WH 360006
-	Walnut	WN						
	WSP Weathered Steel	360000 WSP	360001 WSP	360002 WSP	360003 WSP	360004 WSP	360005 WSP	360006 WSP
	WZC Weathered Zinc	360000 WZC	360001 WZC	360002 WZC	360003 WZC	360004 WZC	360005 WZC	360006 WZC

Extension downrods 1" (O.D.). Not for use with Kichler[®] Basics fans.

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod

Non-Threaded Downrods – Basics 400 Series

	Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft.
	Suggested Downrod Length	12" 	18" 	24" 	36" 	48" 	60" 	72"
	FINISHES							
•	MWH	450	451	452	453	454	455	456
	Matte White	MWH	MWH	MWH	MWH	MWH	MWH	MWH
-0	NI	450	451	452	453	454	455	456
	Brushed Nickel	NI	NI	NI	NI	NI	NI	NI
•	SBK	450	451	452	453	454	455	456
	Satin Black	SBK	SBK	SBK	SBK	SBK	SBK	SBK
	SNB	450	451	452	453	454	455	456
	Satin Natural Bronze	SNB	SNB	SNB	SNB	SNB	SNB	SNB
•	SNW	450	451	452	453	454	455	456
	Satin Natural White	SNW	SNW	SNW	SNW	SNW	SNW	SNW
•	WH	450	451	452	453	454	455	456
	White	WH	WH	WH	WH	WH	WH	WH

Extension non-threaded downrods ³/₄" (O.D.). For use exclusively with all Kichler[®] Basics fans.

Hanger System Accessories – Non-Threaded



	45° Slope Adapter
ltem Number and Finishes	471 MWH, NI, SBK, SNB (shown), SNW, WH
Features	 Adapts to sloped or vaulted ceilings from 0° to 45° Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating.
Dimensions	6.00" Dia. x 4.00" H
Notes	 Designed for use with ¾" O.D. downrods ONLY (see above) Available in all Kichler[®] Basics fan finishes Downrod sold separately

All Kichler[®] Basics ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 22° slope. For ceilings in excess of 22° of slope, please utilize our 45° Slope Adapter (471).



Outdoor Light Kits

LED Industrial Mesh Light Kit

380952 DBK (shown), MWH, OZ, TZP, WCP, WSP, WZC

Glass	Etched Cased Opal	
Downlight	 17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K 	·
Dimensions	12.75" Diameter 6.25" Height	
ETL Listed	Wet	

LED Bluetooth[®] Audio Light Kit

380950 MWH, NI (shown), SBK, SNB

Glass	Etched Cased Opal	
Downlight	 17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K 	
Dimensions	13.00" Diameter 5.25" Height	
ETL Listed	Damp	
Notes	Works on any fan that accepts a light kit. Dual speakers: 7W, 84dB each.	💷 D 🚷 Bluetooth


LED Yorke Ceiling Fan Light Kit

380915 DBK, MWH, SBK (shown), TZP, WCP, WH, WSP

Glass	Clear Seeded	
Downlight	• Includes (1) E26, 7W LED, 2,700K	
Dimensions	8.50" Diameter 9.00" Height	
cUL Listed	Wet	💷 🔍 🖕

LED Bridge Point Ceiling Fan Light Kit

380945 DBK, OZ (shown), WCP, WSP, WZC

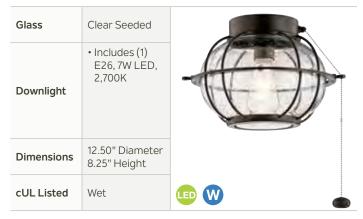

LED Ahrendale[™] Ceiling Fan Light Kit

380949 AUB, **AVI** (shown), WZC



Schoolhouse Light Kit

380903 ANS, CMO, MWH, NI, SBK (shown), SNB, SNW, TZP, WCP, WH, WSP

Glass	Cased Opal	
Downlight	• Includes (1) E26, 13W CFL, 4052	
Dimensions	8.00" Diameter 6.75" Height	
cUL Listed	Wet	\mathbf{W}

Outdoor Light Kits

Small Low-Profile Light Kit					
3		OBB (shown), OZ, /, TZP, WH			
Glass	Etched Cased Opal				
Downlight	 Includes (2) E11, 50W JD Halogen Lamps, 5920FST Low-profile 				
Dimensions	9.00" Diameter 4.00" Height				
cUL Listed	Wet				
Notes	Designed for smaller blade sweep fans	W			

380020 ANS (shown), CMO, MWH, NI, OBB, SBK, SNB, TZP, WH Etched Cased Glass Opal Includes (2) E11, 50W JD Halogen Lamps, Downlight 5920FST Low-profile 11.50" Diameter Dimensions 4.25" Height (ALL) cUL Listed Wet W Notes

Large Low-Profile Light Kit

LED Low-Profile Light Kit

380930 MUL (WH shown)

LED Low-Profile Light Kit

380931 MUL (SNB shown)

Glass	Etched Cased Opal
Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K
Dimensions	11.50" Diameter 4.25" Height
cUL Listed	Wet
Notes	Includes MWH, NI and SNB finishes.

Glass	Umber Etched	
Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K 	
Dimensions	11.50" Diameter 4.25" Height	
cUL Listed	Wet	
Notes	Includes MWH, NI and SNB finishes.	

FINISH CODES

ANS	Antique Satin Silver	OBB	Oil Brushed Bronze [™]	WH	White
AP	Antique Pewter	οz	Olde Bronze®	WSP	Weathered Steel
AUB	Auburn Stained	SBK	Satin Black	WZC	Weathered Zinc
AVI	Anvil Iron	SGD	Sterling Gold		
СМО	Coffee Mocha	SNB	Satin Natural Bronze		
DBK	Distressed Black	SNW	Satin Natural White		
MDW	Mediterranean Walnut	ΤZ	Tannery Bronze [™]		
MWH	Matte White	TZP	Tannery Bronze [™] Powder Coat		
NI	Brushed Nickel	WCP	Weathered Copper		

Outdoor Light Kits

CLI	MATES [™] CFL	Slim-Profile Light Kit		CLIMATES [™] L	.ED Light Kit
380910	ANS (shown),	CMO, DBK, SBK, SNW, WH		338629 MWH, WC	CP, WSP (shown)
Glass	Cased Opal		Glass	Etched Cased Opal	
Downlight	 Includes (1) E26, 23W CFL Lamp, 4052 11.00" Diameter 		Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 2000/	
Dimensions	4.50" Height			• 3,000K 7.50" Diameter	
cUL Listed	Wet		Dimensions	3.00" Height	_
	ABS fixture.		cUL Listed	Wet	
Notes	Designed for use with CLIMATES [™] Fans, but compatible with many	W C	Notes	Aluminum fixture. Designed for use with Arkwet [™] CLIMATES [™] Fans, but compatible with many	

Outdoor CFL Light Kit

380902 SBK (shown), SNB, SNW, TZP, WCP, WH, WSP

Outdoor CFL Light Kit

338050 ANS, CMO, DBK, SBK, SNW, TZP (shown), WCP, WH, WSP

Glass	Cased Opal		Glass	Cased Opal	
Downlight	• Includes (2) GU24, 13W CFL Lamps, 4043		Downlight	• Includes (2) E26, 13W CFL Lamps, 4052	
Dimensions	11.00" Diameter 4.50" Height	6	Dimensions	10.25" Diameter 5.50" Height	
cUL Listed	Wet		cUL Listed	Wet	-
Notes		W	Notes		W

Indoor Light Kits

LED Low-Profile Light Kit

380030 MUL (WH shown)

Glass	Etched Cased Opal
Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K
Dimensions	10.00" Diameter 4.75" Height
cUL Listed	Indoor
Notes	Includes MWH, NI and SNB finishes.

380032 MUL (SNB shown)				
Glass	Umber Etched			
Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K 			
Dimensions	10.00" Diameter 4.75" Height			
cUL Listed	Indoor			
Notes	Includes MWH, NI and SNB finishes.			

LED Low-Profile Light Kit

LED Low-Profile Light Kit

380031 MUL (WH shown)

Glass	Etched Cased Opal
Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K
Dimensions	13.00" Diameter 4.75" Height
cUL Listed	Indoor
Notes	Includes MWH, NI and SNB finishes.

LED Low-Profile Light Kit

380033 MUL (SNB shown)

Notes	Includes MWH, NI and SNB	
cUL Listed	Indoor	
Dimensions	13.00" Diameter 4.75" Height	
Downlight	 17W Dimmable Integrated LED Platform 1,600 lm 80 CRI 3,000K 	
Glass	Umber Etched	

LED Low-Profile Light Kit

338200 AP (shown), DBK, MWH, NBR, NI, OBB, SGD, SNB, SNW, TZ, WH

Glass	Etched Cased Opal	
Downlight	17W Dimmable Integrated LED Platform 1,600 Im 80 CRI 3,000K	
Dimensions	11.50" Diameter 4.25" Height	•
ETL Listed	Indoor	
Notes		LED

Indoor Light Kits

		3-Light Bowl Light Kit			
Item Number		338506 MUL (WH shown)	338509 MUL (WH shown)	338507 MUL (OBB shown)	338508 MUL (OBB shown)
Downlight	• Includes (3), E12, 60W Max. B8 Lamps				
Dimensions	11.00" Diameter 5.75" Height				
cUL Listed	Indoor	Ú			
Glass		White Alabaster Swirl	Opal Etched	Citrine	Umber Etched
Notes	Includes BSS, DBK, NI, OBB, SNW, TZ and WH cap finishes.				

		Fluorescent Larg	orescent Large Bowl Light Kit		
Item Number		338150 MUL (NI shown)	338151 MUL (WH shown)		
Downlight	• Includes (3), E26, 23W CFL Lamps				
Dimensions	12.50" Diameter 5.50" Height	The second secon	6.0		
cUL Listed	Indoor	e			
Glass		Satin Etched	White Linen		
Notes	Includes NI, OBB, SNW, TZ and WH cap finishes.				
ltem Number	r	338153 MUL (TZ shown)	338154 MUL (TZ shown)		
Downlight	• Includes (3), E26, 23W CFL Lamps				
Dimensions	12.50" Diameter 5.50" Height	*	*		
cUL Listed	Indoor	•	•		
Glass		Pine Bark	Alabaster Swirl		
Notes	Includes NI, OBE	8, SNW, TZ and WH cap finishes.	P P		

Indoor Light Kits

		3-Light Decorative Fitter Light Kit		
Item Number		338505 NI, OBB, TZ, WH		
Downlight	• Includes (3) E12, 40W Max. B10.5 Lamps, 4063CLR			
Dimensions	12.75" Diameter 6.50" Height			
cUL Listed	Indoor			
Glass	NI - White Alabaster Swirl		OBB - Umber Alabaster	
Downlight	 Includes (3) E12, 40W Max. B10.5 Lamps, 4063CLR 			
Dimensions	12.75" Diameter 6.50" Height			
cUL Listed	Indoor			
Glass	WH - White Alabaster Swirl		TZ - Umber Alabaster	

		3-Light Decorative Fitter Light Kit	
Item Number		370041 DBK (shown), NI, OBB, SBK, SNW, TZ, WH	
Downlight	• Includes (3) E12, 40W Edison Lamps, 4058CLR		
Dimensions	10.25" Diameter 6.75" Height		
cUL Listed	Indoor		
Glass	None		

Indoor Light Fitters

Designed to accommodate 2-1/4" fitter glass (sold separately). See the next page for glass options.

		4-Light Fitter	4-Light Bent Arm Fitter
Item Number		350011 AP, BSS, DBK, MWH, NBR, NI, OBB, SGD, SNB (shown), SNW, TZ, WH	350102 AP, BSS, DBK, MDW (shown), NI, OBB, OZ, SNB, SNW, TZ, WH
Downlight	• Includes (4) E12, 40W Max. B10.5 Lamps		
Socket	Threaded Nord Sockets		
cUL Listed	Indoor	6	
Dimensions		6.75" Width 3.50" Height	12.75" Width 3.50" Height
Notes	Includes retainer nut tool for easy assembly of glass shades.		

		4-Light Medium Base Fitter	4-Light Bent Arm Fitter
Item Number		350110 AP, DBK, NI, OBB (shown), SNB, SNW, TZ, WH	350005 AP, BSS, DBK, MDW, MWH, NI (shown), OBB, OZ, SNB, SNW, TZ, WH
Downlight	• Includes (4) E26, 13W CFL, Non- Dimmable Lamps		
Socket	Threaded Nord Sockets		
cUL Listed	Indoor		
Dimensions		6.75" Width 3.75" Height	12.75" Width 3.50" Height
Notes	Includes retainer nut tool for easy assembly of glass shades.		

2-1/4" Fitter Glass



	2-1/4" Fitter Glass				
Item Number	340126	340127	340115	340116	340135
Glass	Umber Etched	Satin Etched	Citrine	Etched Seedy	Clear Seeded
Dimensions	5.25" Width 4.75" Height	5.25" Width 4.75" Height	5.50" Width 5.00" Height	5.50" Width 5.00" Height	5.25" Width 4.75" Height



	2-1/4" Fitter Glass				
ltem Number	340010	340011	340012	340114	340121
Glass	Satin Etched Cased Opal	White Vetro Mica	Cased White Water	Frosted Ribbed	White Alabaster
Dimensions	5.25" Width 5.00" Height	5.25" Width 5.00" Height	5.25" Width 5.00" Height	4.50" Width 5.00" Height	5.00" Width 5.25" Height




	2-1/4" Fitter Glass				
Item Number	340129*	340130 [•]	340131 [•]	340128	340133
Glass	Pine Bark	White Linen	Mocha Wisp	White Alabaster	Clear/Etched
Dimensions	4.25" Width 4.50" Height	4.25" Width 4.50" Height	4.25" Width 4.50" Height	5.25" Width 4.75" Height	4.75" Width 5.25" Height

*Requires Nord type socket.


Lighting Component Selection Guide


STEP ONE Select Glass (See page 327)			
		Art Glass Bowl	Edenvale [™] Etched Golden Antique Glass Bowl
	Item Number	340001	340002
	Dimensions	11.75" Diameter 4.75" Height	12.25" Diameter 4.25" Height
			-

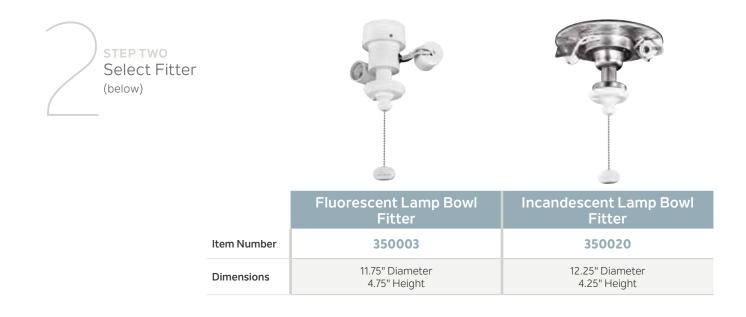



Glass Bowls

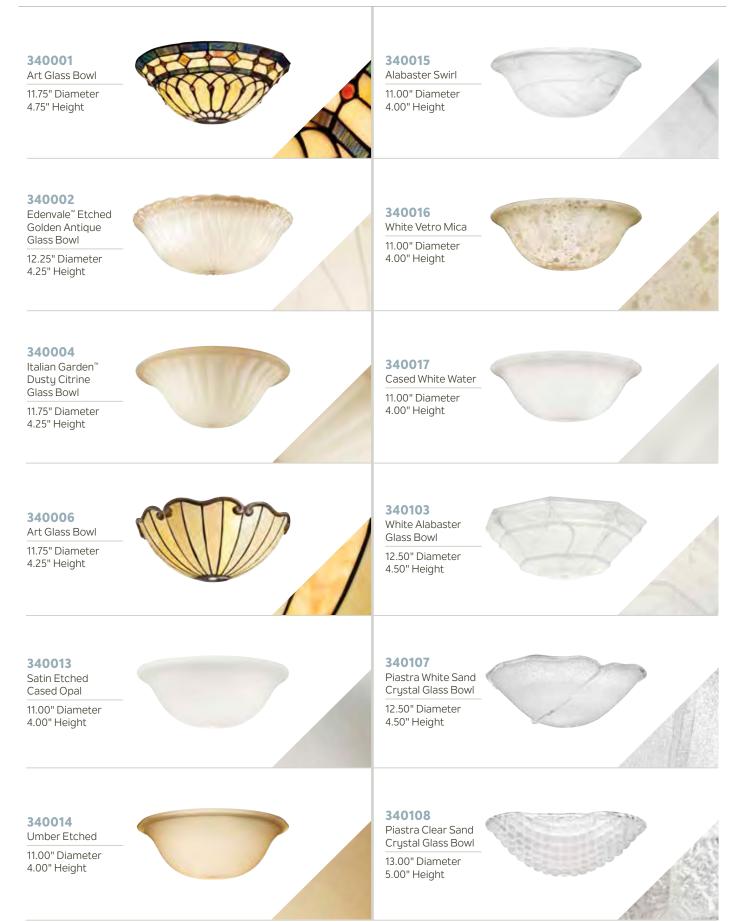

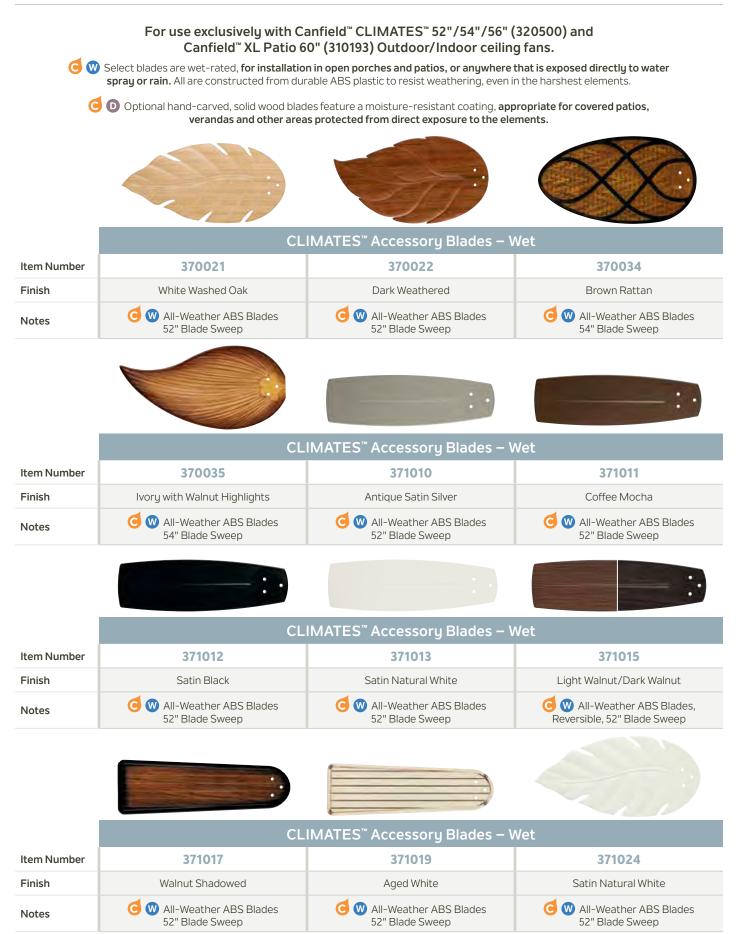

Accessory Blades

	CLIMATES [™] Access	ory Blades – Damp
Item Number	371021	371101
Finish	lvory with Walnut Highlights	American Walnut Stain
Notes	O Solid Wood Blades 52" Blade Sweep	C D Solid Wood Blades 56" Blade Sweep

For use exclusively with Canfield[™] 52" (300117) and Canfield[™] Pro LED 52" (330013) ceiling fans.



	Indoor 52" Accessory Blades – Solid Wood			
Item Number	371030	371031	371038	
Finish	Weathered White Walnut	Shadowed Walnut	Weathered Dark Walnut	
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	







	Indoor 52" Accessory Blades – Solid Wood			
Item Number	370050	371070	371040	
Finish	Walnut Shadowed	Distressed White	Silver/Black	
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades, Reversible 52" Blade Sweep	

For use exclusively with 70" Monarch[™] (300206) and Canfield[™] XL (300188) ceiling fans.

	Indoor 70" Accessory Blades – Solid Wood		
Item Number	371050		
Finish	Weathered White Walnut	and the second	
Notes	Solid Wood Blades 70" Blade Sweep		

LIGHT BULB REFERENCE

Incandescent and Compact Fluorescent Light Bulbs



Product ID	Incandescent Light Bulb Description	
4062CLR	40W E12, B8 Clear Replacement Lamp	
4063CLR 4064CLR	40W E12, B10 Clear Replacement Lamp 60W E12, B10 Clear Replacement Lamp	
4069CLR 4070CLR 4060CLR	15W E12, C7 Clear Replacement Lamp 10W E12, C7 Clear Replacement Lamp 7W E12, C7 Clear Replacement Lamp	
4058CLR	40W E12, Antique Decorative Lamp	

Product ID	Fluorescent Light Bulb Descriptio	n
4055	22W T9 Circline G10q Base Replacement Lamp	
4056	22W G10q Replacement Ballast	
4043	13W GU24 Replacement Ballast	
4051	18W GU24 Squat Replacement Ballast	
4052	13W E26 Replacement Ballast	

Product ID	Halogen Light Bulb Description	
5925CLR	100W J Type Halogen Replacement Lamp	× + + + + + + + + + + + + + + + + + + +
5920FST 5910CLR 5902CLR 5903CLR	50W E11, Halogen T3 Replacement Lamp 75W E11, Halogen T3 Replacement Lamp 50W GU10, Halogen T3 Replacement Lamp 100W E11, Halogen T3 Replacement Lamp	
5907FST 5919FST 5905FST	40W E12, Krypton T3 Replacement Lamp 50W E12, Krypton T3 Replacement Lamp 60W E12, Krypton T3 Replacement Lamp	

Equivalent Light Output


To determine which qualified CFL light bulbs will provide the same amount of light as your current incandescent light bulbs, consult the following chart:

Incandescent Light Bulbs Watts (W)	Incandescent Minimum Light Bulbs Lumens (Im)	Common CFL Light Bulbs Watts (W)
40W	450 lm	9W - 13W
60W	800 lm	13W - 15W
75W	1,100 lm	18W - 25W
100W	1,600 lm	23W - 30W
150W	2,600 lm	30W - 52W

• Lamps are included with all light kits.

- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada.

Fan Finishes Swatch Guide

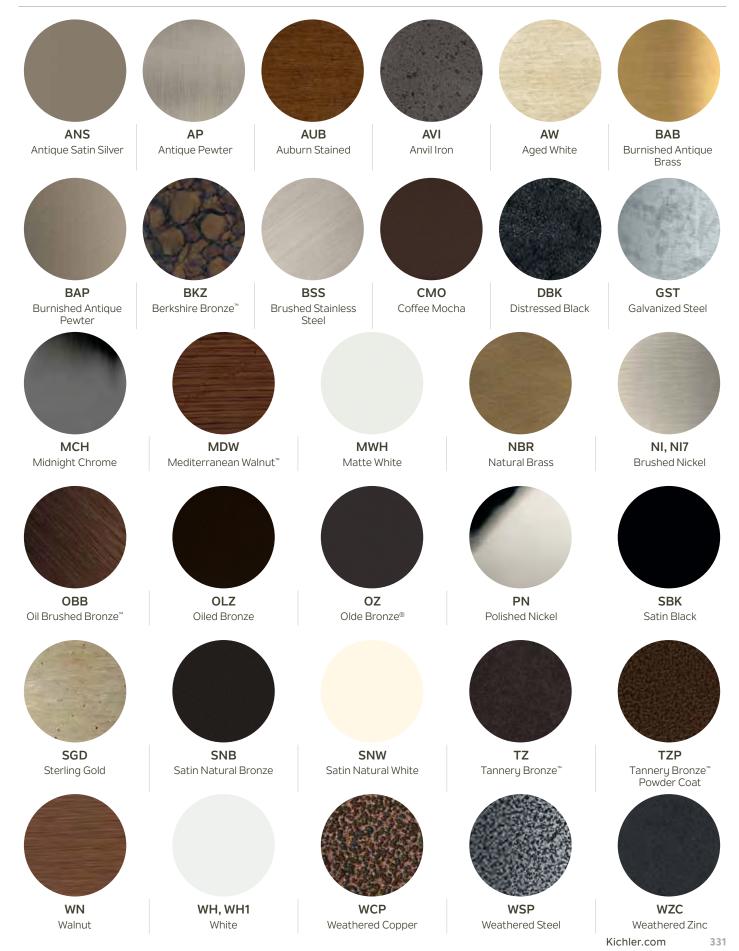

INDEX

3R200	311	300238 AP, OLZ	186	310215 TZP, WSP	114-115	338154 MUL	322
3R400	311	300239 NI	142	310220 OZ, WSP, WZC	230	338200 AP, DBK, MWH	
3W500	311	300250 MWH, SBK, SNB	212	310360 SBK, WH	216	NBR, NI, OBB SGD, SNB SNW,	321
401 SNB, WH, NI, SBK	304	300251 OLZ, NI, WH	144	WH1, WN 310700 MWH, OZ, WSP	86-89	TZ, WH	
402 N17, SNBS, NB WH1,	200	300254 NI, NI7, SNB	46-49	320500 ANS, CMO SNW	256	338203 AP, OBB, PN, WH	128
N17S, SBK	300	300256 BSS, OBB	158	330000 NI, OZ, PN	220	338505 NI, OBB	222
403 SBK, SNB, N17, WH	298	300265 AVI, DBK, WZC	36-37	330000 NI, OZ, PN	220	TZ, WH	323
404 N17, SBK, SNB, WH	302	300269 OZ, AP	160	330001 B33, MWH, OZ	210	338506 MUL	322
414 NI, SNB, WH, SBK	306	300270 SBK, SNB, WH	122	330002 NI, OZ, WH		338507 MUL	322
450	316	300275 AVI, NI, WH	124		264	338508 MUL	322
451	316	300285 AVI, DBK, WZC	32-35	330010 SBK, NI	272	338509 MUL	322
452	316	300300 OZ, SBK, WSP	96-97	330013 MWH, NI, OBB	250	338629 MWH, WCP WSP	320
453	316	300301 OZ, SBK, WSP	94-95	330025 SBK, BSS, WH 330100 NI, WH	274	339013 BAP7, TZ, OBB	208
454	316	300302 OZ, SBK, WSP	90-93	OBB, TZ	292	339017 WH, OBB	282
455	316	300304 SBK, NI, OBB	146	330103 OBBU, WH	284	339022 WH, OBB	280
456	316	300352 OZ, NI	154	NI, OBB	204	339211 MWH, OBB	268
471 MWH, NI, SBK		300356 AVI, NI, OZ	42-45	330110 MWH, TZ, OBB NI, WH	286	AP, OZ, SNW	
SNB, SNW, WH	316	300365 MWH, PN, SBK	50-53	330150 NI, MWH	152	339218 NI, SNB	278
300008 BKZ	198	300457 OBB, AP, NI	184	OZ, MWH		339224 SNB, NI 339240 NI, TZ, MWH	276
300011 AP, OZW, OZ	156	300700 AP, MWH		330151 MWH, NI, OZ	150	OBB, WH	290
300018 AB, DBK	188	NI, NI7	70-73	330152 NI, OZ, MWH	148	339400 AP, MWH	270
OBB, BSS	10.6	300702 NI, OZ	78-81	330171 MWH, NBR, NI OZ, PN	226	OBB, OZ	
300020 OZ, PN	196	300706 BSS, OBB, WH	74-77	330174 MWH, NBR, NI	224	339413 BAP7, OZ, OBB	206
300024 OZ, AP	162	300710 MWH, OBB PN, PNC	98-101	OZ, PN	224	339515 SBK, TZP, WH	294
300026 BSS, OBB 300027 BSS, AP	252	310085 AUB, WZC, AVI	172	330180 MWH, NBR, NI OZ, PN	222	339516 SBK, WH, TZP	288
OBB, NBR	164	310101 GST, WCP, TZP	192	330241 NI, MWH, OZ	244	339629 MWH, WSP WCP	132
300030 AP, NI, OBB	82-85	310103 WCP, DBK, WZC	210	330242 MWH, NI, OZ	242	340001	327
300052 DBK, NI	38-41	310104 TZP, WH		330243 MWH, NI, OZ	240	340002	326
300060 NI, PN, WH	58-61	NI, WCP	140	330247 BAP, MWH		340010	325
300103 WH, NI, OBB	262	310112 ANS, CMO, DBK	136	NI, OBB	238	340011	325
300107 NI, OBB, WH	260	310115 DBK, ANS, CMO	134	330248 BAP, MWH	236	340012	325
300113 AW, TZ	200	310117 DBK, WCP	190	NI, OBB 337001 WH	310	340114	325
300114 NI	180	WZC, TZP		337005	314	340115	325
300114 OZ	180	310136 DBK, OZ, WZC 310139 DBK, WSP, OZ	178 168	337006 AP, BSS, DBK	514	340116	325
300117 NI, BSS, MWH	254			MDW, MWH		340121	325
DBK, OBB, WH		310140 DBK, OZ, WSP 310144 MWH, WSP	166	NBR, NI, OBB OZ, SGD, SNW	326	340126	325
300118 AP, OBB	266	WCP	234	TZ, TZP, WH		340127	325
300125 BSS, MCH	138	310145 MWH, ANS	296	337007	314	340128	325
300146 PN, OBB AP, WH	128		250	337008	314	340128	325
300148 OBB, ZP	182	310150 MWH, WCP WSP	232	337009 WHTR	311		
300160 NI, OBB, PN	102-105	310152 OZ, WZC	176	337012 ALM, IV, WH	312	340130	325
300168 NI, OBB, PN	116-119	310155 NI, SBK	126		148,	340131	325
300173 MWH, NBR, NI		310160 NI, SBK	62-65	337033 OZ	150,	340133	325
PN, SBK, WH	228	WH, WN		337060 NI, SBK, WH	152 65	340135	325
300188 DBK, NI	246	310165 WZC, OZ	174		311	350003	326
OBB, WH		310170 AUB, AVI, WZC	170	337214 TR 338050 ANS, CMO	211	350005 AP, BSS, DBK MDW, MWH	
300200 PN, SBK 300206 BAP, OBB	54-57	310175 NI, WH, WN	66-69	DBK, SBK	320	NI, OBB OZ	324
TZ, WH	204	310181 OZ, WZC	194	SNW, TZP	520	SNB, SNW TZ, WH	
300209 NI, OBB, SBK	106-	310192 WH, WCP, WSP TZP, SBK	258	WCP, WH, WSP 338150 MUL	322	350011 AP, BSS, DBK	
	109	310193 WSP, TZP	248	338151 MUL	322	MWH, NBR, NI	324
300230 NI, OBB, WH	110-113	310206 WCP, MWH WSP	202	338153 MUL	322	OBB SGD, SNB SNW, TZ, WH	
			202	5501551VIUL	522	350020	326

350102 AP, BSS, DBK		371031	329
MDW, NI, OBB OZ, SNB, SNW	324	371038	329
TZ, WH		371040	329
350110 AP, DBK, NI OBB, SNB	324	371042 MUL	310
SNW, TZ, WH		371045 MUL	310
360000	315	371050	329
360001	315	371062 MULTR	310
360002	315	371065 MULTR	310
360003	315	371070	329
360004	315	371075 WHTR	313
360005	315	371082 WH	310
360006	315	371085 ALM, IV, WH	310
370005	310	371101	329
370006	310	380000 OZ	156
370010 ALM, IV, WH	310-313	380007 TZ	200
370011 ALM, IV, WH	311-312	380020 ANS, CMO MWH, NI, OBB	310
370021	328	SBK, SNB, TZP	
370022	328	WH	
370025 AP, OBB, PN, WH	128	380030 MUL	321
370026 AP, OBB, PN,	120	380031 MUL	321
WH	128	380032 MUL	321
370027 AP, OBB, PN, WH	128	380033 MUL	321
370028 AP, OBB, PN, WH	128	380047 AP, OBB, PN, WH	130
370029 AP, OBB, PN, WH 370030 AP, OBB, PN,	128	380120 MWH, NI, OBB OZ, SNB, SNW TZP, WH	319
WH	128	380356 AVI, NI, OZ	45
370032 MUL	312	380902 SBK, SNB	
370034	328	SNW, TZP WCP, WH	320
370035	328	WSP	
370036 ALMTR, IVTR WHTR	313	380903 ANS, CMO MWH, NI, SBK	210
370038 MULTR	311	SNB, SNW TZP WCP	318
370039 MULTR	311	WH, WSP	
370040	312	380910 ANS, CMO DBK, SBK SNW, WH	320
370041 DBK, NI, OBB SBK, SNW, TZ WH	323	380915 DBK, MWH SBK, TZP, WCP	318
370050	329	WH, WSP 380930 MUL	319
371010	328		319
371011	328	380931 MUL 380945 DBK, OZ, WCP	319
371012	328	WSP, WZC	318
371013	328	380949 AUB, AVI, WZC	172, 318
371015	328	380950 MWH, NI	318
371017	328	SBK SNB 380952 DBK, MWH, OZ	
371019	328	TZP, WCP	318
371021	329	WSP, WZC	
371024	328		
371030	329		



SYMBOL GUIDE & NOTES

SYMBOL GUIDE



DC MOTOR

CEILING FANS The ultimate in energyefficient operation

ENERGY STAR[®]

The trusted, governmentbacked symbol for energyefficient products

LED LIGHT KIT

CEILING FANS Feature a long life, light source that is extremely energy efficient



LED

DAMP-RATED

CEILING FANS Engineered for high-humidity areas

WET-RATED CEILING FANS

For open or direct exposure to sun, rain or water spray



CLIMATES[™] CEILING FANS

Built to withstand open exposure to the harshest outdoor elements

OUTDOOR/INDOOR CEILING FANS

This blue line shown at the top of the product page indicates ceiling fans that are Damp- or Wet-rated, but can be used indoors as well



Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules

NOTES

- Bulbs not included unless otherwise noted.
- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.
- All electrical products are rated as 120volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/ CSA/ETL standards for wet location except where noted.
- Many long-life tungsten halogen capsule lamps are now available as alternates to conventional incandescent light bulbs. The halogen capsule lamps may be used to replace any lamp of a higher wattage, but not to exceed the existing specified maximum wattage, i.e., 72W may replace a 75W.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.
- Kichler[®] lighting products are not produced or associated with any Native American Indians, nor are they a Native American product or the product of a particular Indian, Indian tribe or Indian arts and crafts organization as defined by 25 U.S.C. §305 et. seq.

CONSUMER NOTICE

Federal Legislation to phase out 100W incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all general-purpose light bulbs that produce 310–2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs by 2014. The efficiency standards started with 100W bulbs in January 2012 and will end with 40W bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40W or more than 150W). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps, and plant lights.

By 2020, a second tier of restrictions will become effective; which requires all general-purpose bulbs to produce at least 45 lumens per watt (similar to current CFLs). Exempt from the Act are reflector flood, 3-way, candelabra, colored and other specialty bulbs.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energy-efficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal, glass finishes and blades shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of handapplied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite® lanterns.

Due to environmental conditions such as soil acidity, concrete alkalinity and other corrosive soil and air conditions, we cannot guarantee our direct burial posts.



ABBREVIATION KEY

ADAAmericans with Disabilities ActALMAlmondAmpAmperageCCTColor TemperatureCFLCompact Fluorescent LampsCFMCubic Feet Per MinuteCLRClearCRIColor Rendering IndexDDepthdBDecibelDCDirect CurrentDiaDiameterFtFeetGAGaugeHHeighthrsHoursLDInside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMaxMaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.DOutside DiameterRPMRevolutions Per MinuteSq. FtSquare FeetVVoltVAVolt-AmpWWatt, when directly next to a number	AC	Alternating Current
AmpAmperageCCTColor TemperatureCFLCompact Fluorescent LampsCFMCubic Feet Per MinuteCLRClearCRIColor Rendering IndexDDepthdBDecibelDCDirect CurrentDiaDiameterFtFeetGAGaugeHHeighthrsHoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLumensIm/WLumens per WattMax.MaximummmMillimeterMULMutiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterKSquare FeetVVoltVVoltVVolt		0
CCT Color Temperature CFL Color Temperature CFL Color Cubic Feet Per Minute CLR Clear CRI Color Rendering Index D Depth dB Decibel DC Direct Current Dia Diameter Ft. Feet GA Gauge H Height hrs. Hours I.D. Inside Diameter IV Ivory K. Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V. Volt VA Volt-Amp	ALM	Almond
CFL Compact Fluorescent Lamps CFM Cubic Feet Per Minute CLR Clear CRI Color Rendering Index D Depth dB Decibel DC Direct Current Dia Diameter Ft Feet GA Gauge H Height hrs. Hours I.D. Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp	Amp	Amperage
CFL Compact Fluorescent Lamps CFM Cubic Feet Per Minute CLR Clear CRI Color Rendering Index D Depth dB Decibel DC Direct Current Dia Diameter Ft Feet GA Gauge H Height hrs. Hours I.D. Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp	ССТ	Color Temperature
CFM Cubic Feet Per Minute CLR Clear CRI Color Rendering Index D Depth dB Decibel DC Direct Current Dia Diameter Ft. Feet GA Gauge H Height hrs Hours I.D. Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp		
CRI Color Rendering Index D Depth dB Decibel DC Direct Current Dia Diameter Ft Feet GA Gauge H Height hrs Hours I.D Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp		
D Depth dB Decibel DC Direct Current Dia Diameter Ft. Feet GA Gauge H Height hrs. Hours I.D. Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max Maximum mm Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp	CLR	Clear
dB Decibel DC Direct Current Dia Diameter Ft Feet GA Gauge H Height hrs Hours I.D Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Va Volt-Amp	CRI	Color Rendering Index
DC Direct Current Dia. Diameter Ft. Feet GA Gauge H Height hrs. Hours I.D. Inside Diameter IV Ivory K Kelvin temperature L Length LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt Val Volt-Amp	D	Depth
Dia.DiameterFt.FeetGAGaugeHHeighthrs.HoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMax.MaximummmMillimeterMULNot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVolt-Amp	dB	Decibel
Ft.FeetGAGaugeHHeighthrs.HoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMax.MaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	DC	Direct Current
GAGaugeHHeighthrs.HoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMax.MaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	Dia.	Diameter
HHeighthrs.HoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMax.MaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	Ft	Feet
hrs.HoursI.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMax.MaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	GA	Gauge
I.D.Inside DiameterIVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMaxMaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	Н	Height
IVIvoryKKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMaxMaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	hrs.	Hours
KKelvin temperatureLLengthLEDLight Emitting DiodeImLumensIm/WLumens per WattMaxMaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	I.D.	Inside Diameter
LLength LEDLength Emitting Diode Im Lumens Im/W Lumens per Watt MaxMaximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt	IV	Ivory
LED Light Emitting Diode Im Lumens Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V VVIt VA Volt VA	К	Kelvin temperature
Im Lumens Im/W Lumens per Watt Max Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt-Amp	L	Length
Im/W Lumens per Watt Max. Maximum mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt-Amp	LED	Light Emitting Diode
Max.MaximummmMillimeterMULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	lm	Lumens
mm Millimeter MUL Multiple Finishes N/A Not Applicable NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt-Amp	lm/W	Lumens per Watt
MULMultiple FinishesN/ANot ApplicableNPSMNational Pipe & Thread - Straight, MaleO.D.Outside DiameterRPMRevolutions Per MinuteSq. Ft.Square FeetVVoltVAVolt-Amp	Max.	Maximum
N/ANot Applicable NPSMNational Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt	mm	Millimeter
NPSM National Pipe & Thread - Straight, Male O.D. Outside Diameter RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt-Amp	MUL	Multiple Finishes
O.DOutside Diameter RPMRevolutions Per Minute Sq. FtSquare Feet VVolt VAVolt VA	N/A	Not Applicable
RPM Revolutions Per Minute Sq. Ft. Square Feet V Volt VA Volt-Amp	NPSM	National Pipe & Thread - Straight, Male
Sq. Ft. Square Feet V Volt VA Volt-Amp	0.D.	Outside Diameter
V Volt VA Volt-Amp	RPM	Revolutions Per Minute
VA Volt-Amp	Sq. Ft.	Square Feet
	V	Volt
\boldsymbol{W} Watt, when directly next to a number	VA	Volt-Amp
	W	Watt, when directly next to a number
\boldsymbol{W} Width, when paired with L and/or H	W	Width, when paired with L and/or H
Thd Thread	Thd.	Thread

Shown right: Weathered White Walnut ABS Blade Finish; Kyte[™] 300254NI Brushed Nickel Finish with Weathered White Walnut Blades | Page 48

CONNECT WITH US



Like us: Facebook.com/Kichler.Lighting Follow us: Twitter.com/KichlerLight Watch us: YouTube.com/KichlerLighting Join us: Houzz.com/pro/KichlerLighting/Kichler Find us: Pinterest.com/KichlerStyle Follow us: Instagram.com/KichlerLighting

To find an Authorized Dealer, visit Kichler.com.

KICHLER 7711 E. Pleasant Valley Rd. PO Box 318010 Cleveland, Ohio 44131-8010





Our Vision

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com

Featured on Front Cover: Imari LED Celling Fan 300365SBK with 360001SBK 18" Downrod | Pages 52, 315

Catalog No. K1418 | Printed in U.S.A., CF18011-70M | For more information call: 866-558-5706 © 2018 Kichler Lighting LLC. All Rights Reserved. The majority of newer Kichler fixtures are U.S. and Canadian Patent Pending