



- Determine desired amount of stems to be used. **NOTE:** At least one 12" stem must be used at each side of fixture.
 - Screw stems into couplings on fixture.
 - Slip canopy and reinforcement bracket over threaded pipes at top of stems. Secure in place with lockwasher and hexnut.
 - Turn off power.
 - Attach mounting strap to outlet box. (Screws not provided)
 - Thread hexnut onto threaded pipe so that 5 threads are exposed above hexnut. Thread that end of threaded pipe into mounting strap and tighten hexnut against mounting strap.
 - Grounding instructions: (See Illus. A or B).
 - On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box \ ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

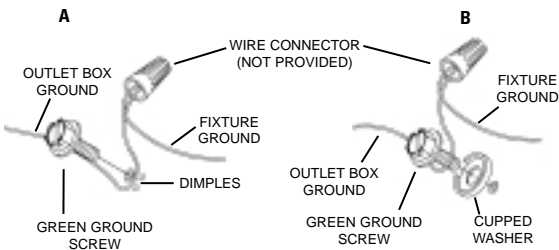

- Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- Push fixture to ceiling, carefully passing threaded pipe through hole.
- Tighten fixture to ceiling with threaded cap.
- Slip glass over socket and secure in place with socket ring.


- Determine the quantity of rods to be used. **NOTE:** At least one 12" rod must be used at each side of fixture.
 - Screw rods into couplings on fixture.
 - Introduce the canopy and reinforcement bracket over the threaded pipes at the top of the rods. Secure in place with a lockwasher and a hex nut.
 - Turn off power.
 - Attach the mounting strap to the outlet box. (Screws are not provided)
 - Thread the hex nut onto the threaded pipe so that 5 threads are exposed above the hex nut. Thread the other end of the threaded pipe into the mounting strap and tighten the hex nut against the mounting strap.
 - Grounding instructions: (See illustration A or B).
 - On fixtures where the mounting strap is provided with a hole and two raised dimples. Wrap the ground wire from the outlet box around the green ground screw, and thread it into the hole.
 - On fixtures where a cupped washer is provided. Attach the ground wire from the outlet box under the cupped washer and the green ground screw, and thread it into the mounting strap.
- If the fixture is provided with ground wire. Connect the fixture ground wire to the outlet box \ ground wire with the wire connector. (Not provided.) After following the above steps, never connect the ground wire to the black or white power supply wires.

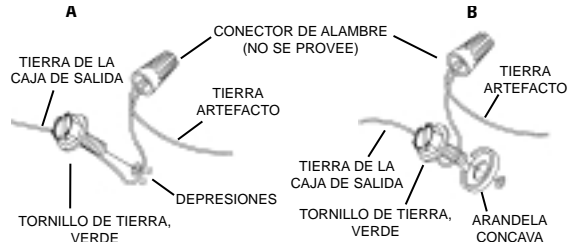

- Make the wire connections (connectors are not provided). Refer to the chart below for the correct connections and the corresponding wires.

Connect the black or red supply wire to:	Connect the white supply wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, brown, gold or black without tracer	Clear, brown, gold or black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illustration).



- Push the fixture to the ceiling, carefully passing the threaded pipe through the hole.
- Tighten the fixture to the ceiling with the threaded cap.
- Slide the glass over the socket and secure it in place with the socket ring.