

KICHLER.






2 Kichler.com/Fans

With its soft, modern design aesthetic, solid construction, performance, and core finish selections, a Renew fan works best in spaces of 100-150 square feet* delivering stylish, comfort to your customers' space.


Have a large space? Consider adding multiple Renew ceiling fans for added comfort.

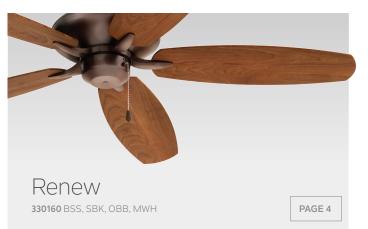







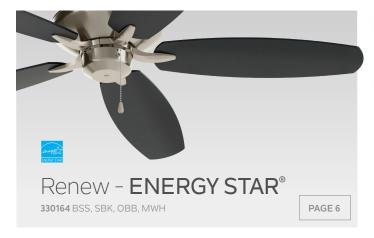



Choosing an AC or DC fan motor for your needs

AC Motor Fans

- Commonly used throughout residential and multi-use applications due to ease of maintenance
- Compatible with optional controls wall or handheld remotes that can program up to 65,000 codes to help avoid interference from other electronics
- 3-speeds, Forward and Reverse for desired comfort

DC Motor Fans

- Whisper quiet, making it ideal for homeowner preferences
- Offer a lightweight motor for easier ceiling installation
- Equipped with an internal transformer to convert AC input power to DC, resulting in energy savings as it uses up to 70% less electricity than an AC motor
- 3-speeds, Forward and Reverse for desired comfort

The Renew ENERGY STAR® qualified model features a DC motor; all remaining models feature an AC motor.

Renew

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White


Ideal for indoor spaces in which the fan complements existing primary light sources throughout the room.





	AIR PERFORMANCE				
(Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt		
	4484	59	90		

HANGING MEASUREMENTS (DOWNROD - 4.5")						
		W/ Downrod	Flush Mount			
Α	Fixture Drop from Ceiling	13.5"	10"	-D→		
В	Blade Drop from Ceiling	10.5"	7"	A B C		
С	Housing Width	11.5"	11.5"			
D	Ceiling Canopy Width	6.5"	6.5"			



Renew Select

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White Glass: Etched Opal Glass

Offers air circulation and illumination to indoor spaces with its frosted white etched opal glass bowl with LED light module.


52" BLADE SWEEP



■ Integrated LED			
330161 BSS	Silver	Satin Black	Brushed cainless Steel BSS
330161 SBK	Satin Black	Silver	Satin Black SBK
330161 OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330161MWH	Matte White	Distressed Antique Gray	Matte White MWH

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4537	59	90

HANGING MEASUREMENTS (DOWNROD - 4.5")						
		W/ Downrod	Flush Mount			
Α	Fixture Drop from Ceiling	17.5"	14"	-D-		
В	Blade Drop from Ceiling	10.5"	7"	A B C		
С	Housing Width	11.5"	11.5"			
D	Ceiling Canopy Width	6.5"	6.5"	Fixture Drop (A) includes light kit		



LIGHT OUTPUT					
Lumens	Watts	CCT	CRI		
1400	17	3000	90		

Renew Premier

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White Glass: Etched Opal Glass

Offers air circulation and illumination to indoor spaces with its 4-light fitter style light kit, including 4 LED medium-based bulbs.

52" BLADE SWEEP



330162 BSS	Silver	Satin Black	Brushed Stainless Steel BSS
330162 SBK	Satin Black	Silver	Satin Black SBK
		112 44	
330162 OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330162MWH	Matte White	Distressed Antique Gray	Matte White

AIR PERFORMANCE			
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt	
4573	59	91	

HANGING MEASUREMENTS (DOWNROD - 4.5")					
		W/ Downrod	Flush Mount		
Α	Fixture Drop from Ceiling	19.25"	16.5"	←D→	
В	Blade Drop from Ceiling	10.5"	7"	A B C	
С	Housing Width	11.5"	11.5"		
D	Ceiling Canopy Width	6.5"	6.5"	Fixture Drop (A) includes light kit	

INCLUDED CONTROL

Pull Chain	Wall Control System - Limited Function 371042MUL
	CoolTouch™ Handheld Control System - Limited Function 371082

Lumens	Watts	ССТ	CRI
2400	9	3000	90

Renew **Designer**

Finish: Brushed Nickel, Satin Black, Satin Natural Bronze, Matte White Glass: Etched Opal Glass

The LED platform of this stylish indoor/outdoor fan was designed to look like it was part of the fan in keeping its sleek, clean appearance.

52" BLADE SWEEP



(LED)	Integrated	LED	Damp I	Rated

330163MWH

330163 NI	Silver	Satin Black	Brushed Nickel
	Satin	Silver	Carrie
330163 SBK	Black	Silver	Satin Black SBK
2204C2CNID	Walnut	Cherry	Satin Natural
330163 SNB		MA W	Bronze SNB

AIR PERFORMANCE*				
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt		
4380	58	86		

Matte

HANGING MEASUREMENTS (DOWNROD - 4.5")						
		W/ Downrod	Flush Mount			
Α	Fixture Drop from Ceiling	15"	11.5"	←D→		
В	Blade Drop from Ceiling	10.5"	7"	A B C		
С	Housing Width	11.5"	11.5"			
D	Ceiling Canopy Width	6.5"	6.5"	Fixture Drop (A) includes light kit		

OPTIONAL CONTROL



Handheld Control System - Basic 337001WH



Wall Control System -Limited Function 371042MUL

Matte White



CoolTouch[™] Handheld Control System -Limited Function 371082

LIGHT OUTPUT					
Lumens	CRI				
1400	17	3000	90		

OPTIONAL CONTROL

Renew - ENERGY STAR®

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White

DC Motor / ENERGY STAR Qualified – this fan brings both performance and efficiency to indoor spaces.

52" BLADE SWEEP



AIR PERFORMANCE				
Airflow Cubic Ft. Per Minute on High	Airflow Efficiency Cubic Ft. Per Minute Per Watt			
5123	30	163		

HANGING MEASUREMENTS (DOWNROD - 4.5")						
		W/ Down Rod	Flush Mount			
Α	Fixture Drop from Ceiling	13.5"	10"	←D→		
В	Blade Drop from Ceiling	10.5"	7"	A B C		
С	Housing Width	11.5"	11.5"			
D	Ceiling Canopu Width	6.5"	6.5"			

INCLUDED CONTROL	OPTIONAL CONTROL			
Pull Chain	N/A			

Renew Patio

Finish: Brushed Nickel, Satin Black, Satin Natural Bronze, Matte White

Indoor/Outdoor – this damp-rated fan offers comfort throughout a variety of environments.






AIR PERFORMANCE*				
Airflow Cubic Ft. Per Minute on High				
4581	59	91		

HANGING MEASUREMENTS (DOWNROD - 4.5")						
		W/ Down Rod	Flush Mount			
Α	Fixture Drop from Ceiling	13.5"	10"	←D→		
В	Blade Drop from Ceiling	10.5"	7"	A B C		
С	Housing Width	11.5"	11.5"			
D	Ceiling Canopy Width 6.5"		6.5"			
	INCLUDED CONTRO	DL	ОРТІС	ONAL CONTROL		
	Pull Chain			Wall Control System - Limited Function		



CoolTouch[™] Handheld Control System -Limited Function 371082

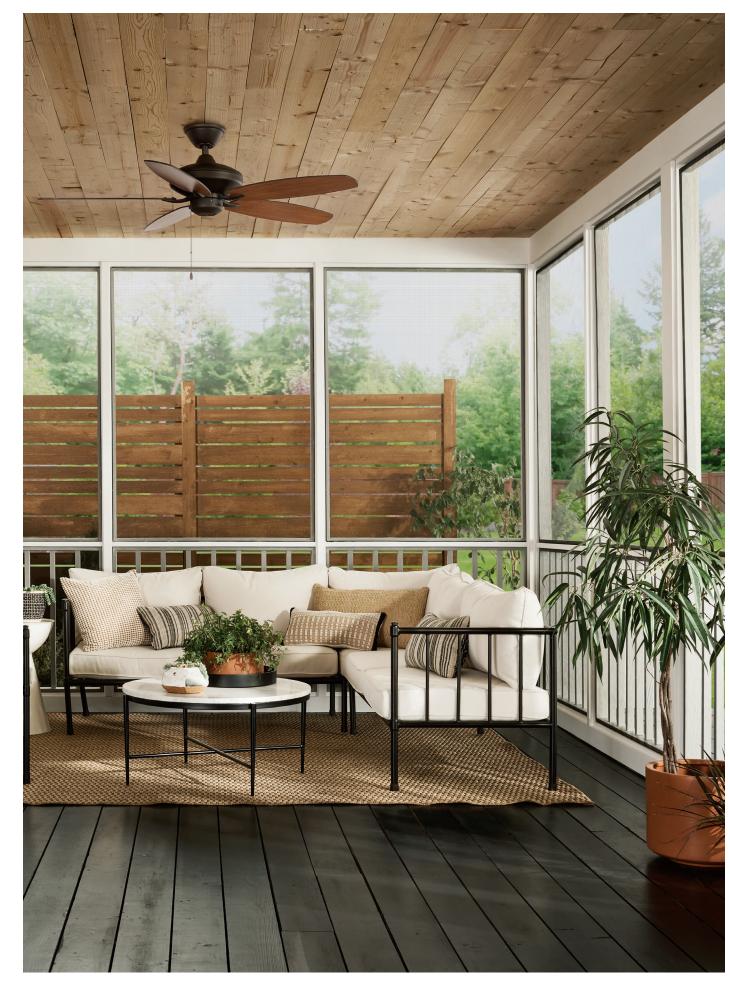

Kichler.com/Fans 7 6 Kichler.com/Fans ${}^*\mathsf{Performance}\ \mathsf{values}\ \mathsf{are}\ \mathsf{based}\ \mathsf{on}\ \mathsf{indoor}\ \mathsf{applications}\ \mathsf{and}\ \mathsf{may}\ \mathsf{vary}\ \mathsf{when}\ \mathsf{used}\ \mathsf{in}\ \mathsf{outdoor}\ \mathsf{applications}.$

AC Control Systems

Includes transmitter and receiver





Wet Rated

Wet Rated

CoolTouch™ Handheld Control System - Limited Function

- Designed for AC motor fans
- 65K Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- · Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Ivory (IV) faceplate colors -370010.



Available Transmitter 371062 MULTR

65K Wall Transmitter – Limited Function Almond (ALM), Ivory (IV) or White (WH)



371085 ALM, IV, WH CoolTouch™ Handheld Control System - Full Function

- AC Motor Fans
- 65K Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Ivory (IV) faceplate colors -370010.



Available Transmitter 371065 MULTR

65K Wall Transmitter - Full Function Almond (ALM), Ivory (IV) or White (WH)

KICHLER' Or C

371042MUL Wall Control System - Limited Function

- Designed for AC motor fans
- 65K Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370005 65K CoolTouch™ Transmitter -Limited Function

Wet Rated

Wet Rated



371045MUL Wall Control System - Full Function

- Designed for AC motor fans
- 65K Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370006 65K CoolTouch™ Transmitter -**Full Function**



Handheld Control System - Basic

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming. On/off only for fluorescent. Not recommended for LED light kits.
- Transmitter is Dry-rated for indoor use only.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.

AC Controls – Transmitter only



370038MULTR Wall Transmitter -**Full Function**

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimmina
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337009WHTR CoolTouch™ Transmitter -Full Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse. and Motor Off
- Lights on/off with full-range dimming
- · Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.





370039MULTR Wall Transmitter -Limited Function

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337214TR CoolTouch™ Transmitter -Limited Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket, mounting hardware and White faceplate

Accessory 370010 IV



Slope Adapter



337005 BSS, NI, MWH, OBB, SNB, SBK 60°Slope Adapter | 6"Dia. x 4"H

- Adapts to sloped or vaulted ceilings from 0° to 60°
- Accepts our CoolTouch™ Receiver Unit for remote controlled fans
- Includes "Stabilized" Mounting System with tension feature
- Safety features prevent fan from "lifting" off mounting system
- Heavy-duty design features 2 safety pins and 1 screw set for maximum safetu
- Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating
- · Designed for use with 1" O.D. downrods ONLY
- Available in all Kichler® fan finishes
- Downrod sold separately
- U.S. Patent Pending









All Kichler® ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).

Recommended for fan stability in high wind applications. (For any slope or flat ceiling)

Downrod Extensions

	Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft. +
	Downrod Size	12"	18"	24"	36"	48"	60"	72"
	FINISHES							
	BSS Brushed Stainless Steel	360000BSS	360001BSS	360002BSS	360003BSS	360004BSS	360005BSS	360006BSS
0	MWH Matte White	360000MWH	360001MWH	360002MWH	360003MWH	360004MWH	360005MWH	360006MWH
	NI Brushed Nickel	360000NI	360001NI	360002NI	360003NI	360004NI	360005NI	360006NI
	OBB Oil Brushed Bronze [™]	360000OBB	360001OBB	360002OBB	360003OBB	360004OBB	360005OBB	360006OBB
	SBK Satin Black	360000SBK	360001SBK	360002SBK	360003SBK	360004SBK	360005SBK	360006SBK
	SNB Satin Natural Bronze	360000SNB	360001SNB	360002SNB	360003SNB	360004SNB	360005SNB	360006SNB

SYMBOL GUIDE



DC MOTOR

CEILING FANS The ultimate in energyefficient operation



ENERGY STAR®



The trusted, governmentbacked symbol for energyefficient products



LED LIGHT KIT

CEILING FANS

Feature a long life, light source that is extremely energy efficient



DAMP-RATED

CEILING FANS Engineered for high-humidity areas



WET-RATED

CEILING FANS For open or direct exposure to sun, rain or water spray

DRY-RATED

CEILING FANS

Rated for indoor use only and are NOT intended for damp or wet locations

NOTES

- · Bulbs included unless otherwise noted.
- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.
- All electrical products are rated as 120-volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/CSA/ ETL standards for wet location except where noted.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.
- Kichler® Lighting products are not produced or associated with any Native American Indians, nor are they a Native American product or the product of a particular Indian, Indian tribe or Indian arts and crafts organization as defined by 25 U.S.C. §305 et. seq.

CONSUMER NOTICE

Federal Legislation to phase out 100W incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all generalpurpose light bulbs that produce 310–2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs by 2014. The efficiency standards started with 100W bulbs in January 2012 and will end with 40W bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40W or more than 150W). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps, and plant lights.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energyefficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal, glass finishes and blades shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of handapplied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite® lanterns.

Due to environmental conditions such as soil acidity, concrete alkalinity and other corrosive soil and air conditions, we cannot guarantee our direct burial posts.

Abbreviation Key

PRODUCT SPEC

ACAlternating Current

ADA Americans with Disabilities Act

Amp......Amperage

CCT.....Color Temperature

CFM.....Cubic Feet Per Minute

DC.....Direct Current

Ft.....Feet

K.....Kelvin Temperature

LED.....Light Emitting Diodes

Im.....Lumens

O.D. Outside Diameter

RPM......Revolutions Per Minute

Sq. Ft.....Square Feet

w Watt, when directly next to a numbers

wWidth, when paired with L and/or H

SBK......Satin Black

FINISHES

BSS...... Brushed Stainless Steel

MWH..... Matte White

NI.....Brushed Nickel

OBBOil Brushed Bronze®

Watch us: youtube.com/KichlerLighting Find us: linkedin.com/company/KichlerLighting

Kichler Lighting 7711 East Pleasant Valley Road P.O. Box 318010

Cleveland, Ohio 44131

CONNECT WITH US

Join us: houzz.com/pro/KichlerLighting/Kichler

Follow us: instagram.com/KichlerLighting

Like us: facebook.com/Kichler.Lighting

Follow us: twitter.com/KichlerLight

Find us: pinterest.com/KichlerStyle


To find an Authorized Dealer, visit Kichler.com/Where-to-buy







All electrical products are UL/CSA/ or ETL Listed and Certified to UL/CSA Standards for use in U.S.A. and Canada except where noted.

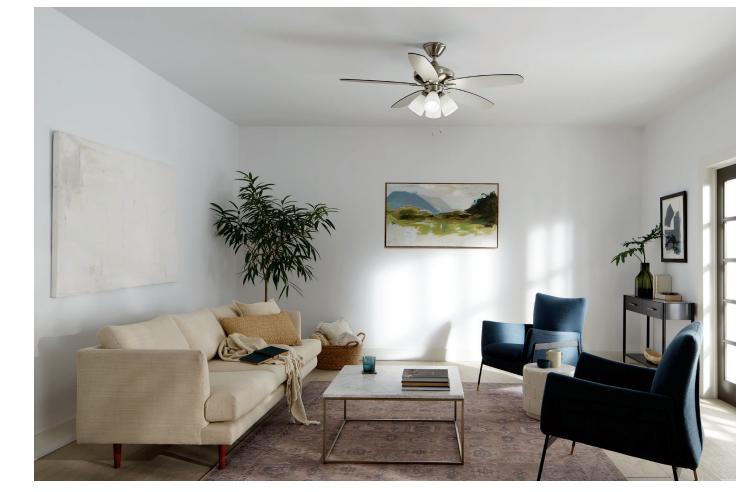



Renew fans are also compatible with accessory light kits.

Search our complete offering at Kichler.com

10 Kichler.com/Fans Kichler.com/Fans 11

Our Vision

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com

