


INCANDESCENT / LED 12V HYBRID PATH & SPREAD

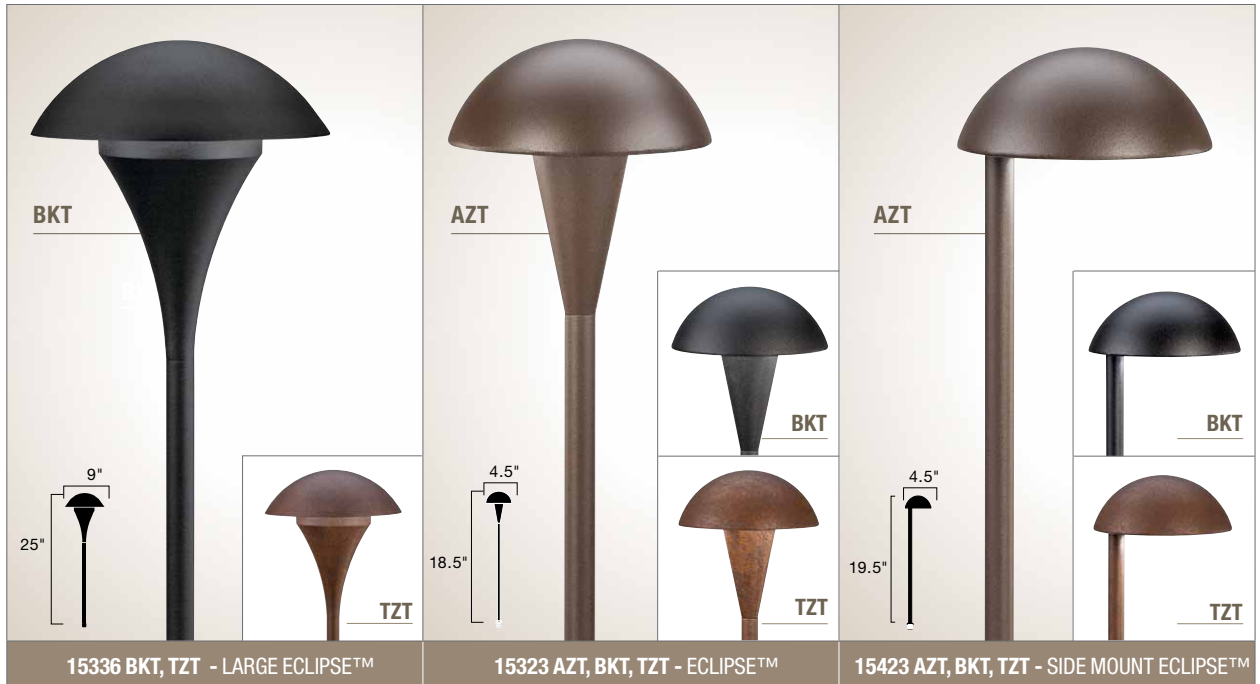

15336 BKT, Tzt - LARGE ECLIPSE™ **15323 AZT, BKT, Tzt - ECLIPSE™** **15423 AZT, BKT, Tzt - SIDE MOUNT ECLIPSE™**

Description	A larger version of our popular Eclipse design to cast a wider light spread on a wide path or patio.	A smaller scale, contemporary design with a dome cap that creates a soft, warm circular glow of light.	Popular dome cap design in a side-mounted fixture for more directional lighting.																																																												
Ordering Guide & Finish	15336 BKT - Textured Black 15336 Tzt - Textured Tannery Bronze™	15323 AZT - Textured Architectural Bronze 15323 BKT - Textured Black 15323 Tzt - Textured Tannery Bronze™	15423 AZT - Textured Architectural Bronze 15423 BKT - Textured Black 15423 Tzt - Textured Tannery Bronze™																																																												
Housing	Cast Aluminum with clear glass	Cast Aluminum	Cast Aluminum																																																												
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket	12V S8 wedge base socket																																																												
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)																																																												
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)																																																												
LED Lamp Options	2W (18036-18038) see page 159 Compares up to 18.5W Krypton	2W (18036-18038) see page 159 Compares up to 18.5W Krypton	2W (18036-18038) see page 159 Compares up to 18.5W Krypton																																																												
Wiring	35" of usable #18-2, SPT-1-W leads Cable connector supplied	37" of usable #18-2, SPT-1-W leads Cable connector supplied	34" of usable #18-2, SPT-1-W leads Cable connector supplied																																																												
Mounting Acces. Included	8" In-ground stake	8" In-ground stake	8" In-ground stake																																																												
Optional Acces.	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket																																																												
Photometric with Supplied Lamp	<table border="1"> <tr> <td>Distance from Light</td> <td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td><td>9'</td> </tr> <tr> <td>Footcandles</td> <td>8.7</td><td>3.3</td><td>1.1</td><td>.4</td><td>.1</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> </table>	Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'	Footcandles	8.7	3.3	1.1	.4	.1	-	-	-	-	<table border="1"> <tr> <td>Distance from Light</td> <td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td><td>9'</td> </tr> <tr> <td>Footcandles</td> <td>14.7</td><td>4.8</td><td>1.8</td><td>1</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> </table>	Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'	Footcandles	14.7	4.8	1.8	1	-	-	-	-	-	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td><td>1'</td><td>2'</td><td>3'</td><td>4'</td><td>5'</td><td>6'</td><td>7'</td><td>8'</td> </tr> <tr> <td>Footcandles</td> <td>44.3</td><td>18.6</td><td>5.7</td><td>1.8</td><td>.3</td><td>.2</td><td>-</td><td>-</td><td>-</td> </tr> </table>	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Footcandles	44.3	18.6	5.7	1.8	.3	.2	-	-	-
Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'																																																						
Footcandles	8.7	3.3	1.1	.4	.1	-	-	-	-																																																						
Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'																																																						
Footcandles	14.7	4.8	1.8	1	-	-	-	-	-																																																						
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																																						
Footcandles	44.3	18.6	5.7	1.8	.3	.2	-	-	-																																																						

Denotes fixture is compatible with incandescent or LED lamps.

INCANDESCENT/LED 12V HYBRID PATH & SPREAD

P