


FUNDAMENTALS™



15439 CO, OB, TZT

LARGE CENTER  
MOUNT

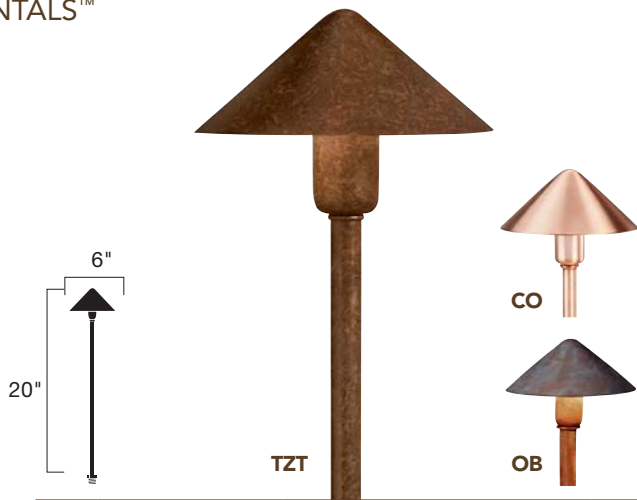

15328 AZT

Ordering Guide & Finish	15439 CO 15439 OB 15439 TZT	15328 AZT
Housing	Brass or Unfinished Copper	Aluminum
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)
LED Lamp Options	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.
Wiring	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket
Integrated LED Options	15839 on page 35	NA
Notes	Copper will develop natural patina over time	N/A
Photometric with Supplied Lamp	Distance from Light	0' 1' 2' 3' 4' 5' 6' 7' 8'
	Foot Candles	13.4 4.55 1.65 .58 .13 – – – –
	Stem Height	1' 2' 3' 4' 5' 6' 7' 8' 9'
	12"	20.8 4.1 .27 – – – – –
	18" Supplied	12.1 5.6 1.8 .67 – – – – –
	24"	8.3 5.8 2.2 .97 .48 .02 – – –