


GATE HOUSE™



15379 OZ

ARIES MANOR™

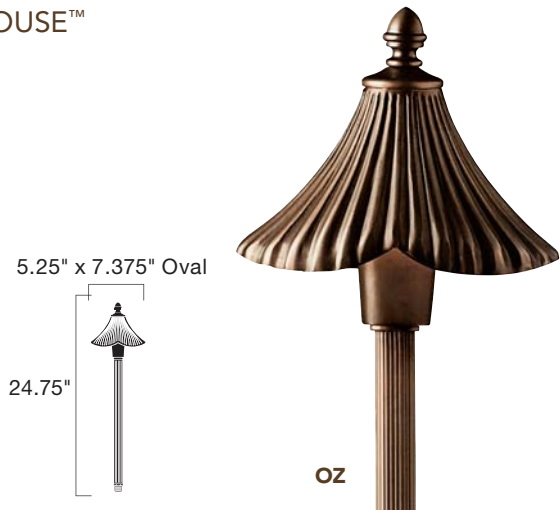

15447 OZ

Ordering Guide & Finish	15379 OZ	15447 OZ																																								
Housing	Cast Brass	Brass with cocoa turned marble accent																																								
Lamp Base	12V S8 wedge base socket	12V T5 wedge base socket																																								
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	11.6-W(VA) 912X (17023) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)																																								
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)																																								
LED Lamp Options	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18039-18041) see page 137. Compares up to 16W Xenon.																																								
Wiring	34" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	24" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																																								
Mounting Access. (Included)	14" In-ground slotted stake	8" In-ground slotted stake																																								
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket																																								
Notes	U.S. Patent No. D561,371. Brass will develop natural patina over time.	Brass will develop natural patina over time																																								
Photometric with Supplied Lamp	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> </tr> <tr> <td>Foot Candles</td> <td>8.16</td> <td>3.43</td> <td>3.43</td> <td>1.46</td> <td>.33</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot Candles	8.16	3.43	3.43	1.46	.33	-	-	-	-	<table border="1"> <tr> <td>Distance from Light</td> <td>0'</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> </tr> <tr> <td>Foot Candles</td> <td>6.9</td> <td>4.9</td> <td>2.9</td> <td>1.3</td> <td>0.4</td> <td>0.1</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Foot Candles	6.9	4.9	2.9	1.3	0.4	0.1	-	-	-
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																	
Foot Candles	8.16	3.43	3.43	1.46	.33	-	-	-	-																																	
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																	
Foot Candles	6.9	4.9	2.9	1.3	0.4	0.1	-	-	-																																	