


KOBE® KOBE Brand Range Hood

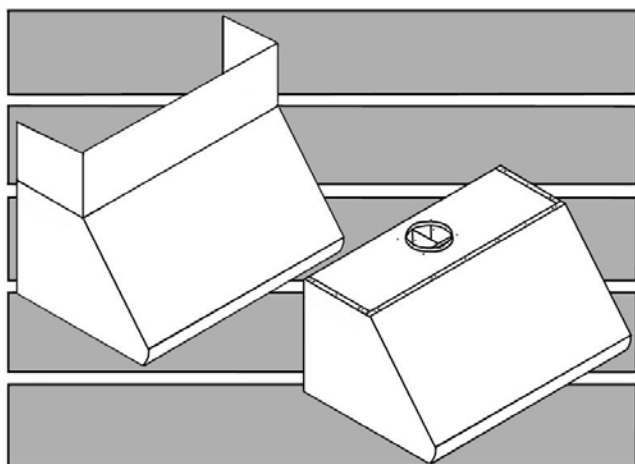

CH-100 Series (18" Height)


Model No.:

CH0030SQB-1 (30")

CH0036SQB-1 (36")

CH0042SQB-1 (42")

CH0048SQB-1 (48")

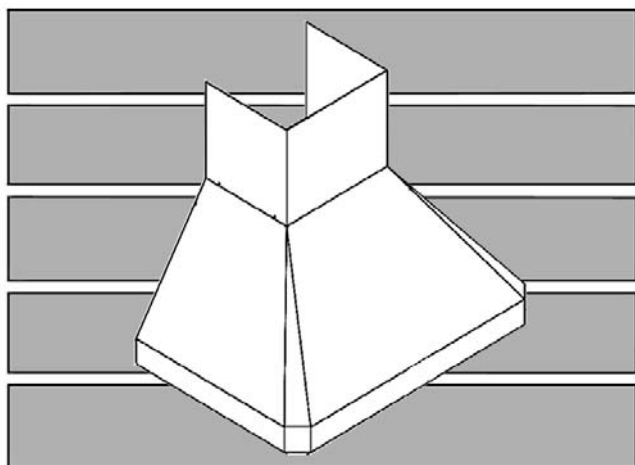

RA-02 Series (18" Height)

Model No.:

RA0230SQB-1 (30")

RA0236SQB-1 (36")

RA0242SQB-1 (42")

RA0248SQB-1 (48")

**INSTALLATION INSTRUCTIONS
AND OPERATION MANUAL**

- READ AND SAVE THESE INSTRUCTIONS -

CONTENTS

IMPORTANT SAFETY INSTRUCTIONS	1
COMPONENTS OF PACKAGE.....	3
INSTALLATION.....	5
OPERATION INSTRUCTIONS.....	15
MAINTENANCE.....	16
SPECIFICATIONS	17
MEASUREMENTS & DIAGRAMS.....	19
PARTS LIST.....	22
CIRCUIT DIAGRAM.....	28
TROUBLE SHOOTING	29
DISCLAIMER.....	30
WARRANTY	31
PRODUCT REGISTRATION.....	33

- READ ALL INSTRUCTIONS CAREFULLY BEFORE STARTING -

ALL WIRING MUST BE DONE BY A PROFESSIONAL AND IN ACCORDANCE WITH
NATIONAL AND LOCAL ELECTRICAL CODES.



IMPORTANT SAFETY INSTRUCTIONS

- PLEASE READ THIS SECTION CAREFULLY BEFORE INSTALLATION -

⚠WARNING: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY, OBSERVE THE FOLLOWING:

- 1) Installation and electrical wiring must be done by qualified professionals and in accordance with all applicable codes and standards, including fire-rated construction.
- 2) When cutting or drilling into wall or ceiling, be careful not to damage electrical wiring or other hidden utilities.
- 3) Ducted fans must be vented to the outside.
 - a) Before servicing or cleaning unit, open the light panel and SWITCH POWER OFF AT SERVICE PANEL.
 - b) Clean all grease laden surfaces frequently. To reduce the risk of fire and to disperse air properly, make sure to vent air outside. DO NOT vent exhaust air into wall spaces, attics, crawl spaces or garages.

NOTE - This warranty is invalid without an authorized agent's receipt or if unit is damaged due to misuse, poor installation, improper use, mistreatment, negligence or any other circumstances beyond the control of KOBE RANGE HOODS authorized agents. Any repair carried out without the supervision of KOBE RANGE HOODS authorized agents will automatically void the warranty.

- KOBE RANGE HOODS will not be held responsible for any damages to personal property or real estate or any bodily injuries whether caused directly or indirectly by the range hood.

⚠WARNING: TO REDUCE THE RISK OF PERSONAL INJURY IN THE EVENT OF A RANGE TOP GREASE FIRE:

1. Keep all fan, baffle/spacer/filter/oil tunnel/oil container and grease-laden surfaces clean. Grease should not be allowed to accumulate on fan, baffle/spacer/filter/oil tunnel/oil container.
2. Always turn hood ON when cooking.
3. Use high settings on cooking range ONLY when necessary.
4. Do not leave cooking range unattended when cooking.
5. Always use cookware and utensils appropriate for the type and amount of food prepared.
6. Use this unit only in the manner intended by the manufacturer.
7. Before servicing, switch power off at service panel and lock service panel (if possible) to prevent power from switching on accidentally.
8. Clean ventilating fan frequently.

What to Do In The Event Of a Range Top Grease Fire

- SMOTHER FLAMES with a tight fitting lid, cookie sheet, or metal tray, and then turn off the burner. KEEP FLAMMABLE OR COMBUSTIBLE MATERIAL AWAY FROM FLAMES. If the flames do not go out immediately, EVACUATE THE AREA AND CALL THE FIRE DEPARTMENT or 911.
- NEVER PICK UP A BURNING PAN – You May Get Burned.
- DO NOT USE WATER, including wet dishcloths or towels – a violent steam blast will result.
- Use an extinguisher ONLY if:
 - a) You have a Class A, B, C extinguisher and know how to operate it.
 - b) The fire is small and contained in the area where it started.
 - c) The fire department has been called.
 - d) You can fight the fire with your back to an exit.

What to Do If You Smell Gas

- Extinguish any open flame.
- Do not try to turn on the lights or any type of appliance.
- Open all doors and windows to disperse the gas. If you still smell gas, call the Gas Company and Fire Department right away.

⚠ CAUTION

- 1) For general ventilation use only. Do not use to exhaust hazardous or explosive materials and vapors.
- 2) To reduce the risk of fire, use only metal ductwork. Sufficient air is needed for proper combustion and exhausting of gases through the flue (chimney) to prevent back drafting.
- 3) Follow the heating equipment manufacturer's guideline and safety standards such as those published by the National Fire Protection Association (NFPA), and the American Society for Heating, Refrigeration and Air Conditioning Engineers (ASHRAE), and code authorities.
- 4) Activating any switch on may cause ignition or an explosion.
- 5) Due to the size and weight of this hood, two people installation is recommended.

⚠ WARNING



ELECTRICAL SHOCK HAZARD – Can result in serious injury or death. Disconnect appliance from electric power before servicing. If equipped, the fluorescent light bulb contains small amounts of mercury, which must be recycled or disposed of according to Local, State, and Federal Codes.


COMPONENTS OF PACKAGE

(Must keep all material for returns or refunds)

CH-100 Series RANGE HOOD BOX

- {A} KOBE Range Hood – 1
- {B} Warranty Registration Card – 1
- {C} Instructions Manual – 1
- {D} Oil Tunnel – 1
- {E} Baffle Filter
 - 2 (30" & 36")
 - 3 (42" & 48")
- {F} Spacer – 2
- {G} 8" Round Exhaust Plate – 1
(42" & 48" only)
- {H} Screws Package – 1
- {I} Hood-Mounting Bracket – 2
- {J} Screws Package – 1


{A}



{B}



{C}




{D}



{E}



{F}




{G}




{H}



{I}



{J}




Duct Cover
(Sold Separately)

Option Of:
Model No. CH0030DC-12 for 30" hood
 KOBE Duct Cover – 1
 Screw Package for Duct Cover – 1

Model No. CH0036DC-12 for 36" hood
 KOBE Duct Cover – 1
 Screw Package for Duct Cover – 1

Model No. CH0042DC-12 for 42" hood
 KOBE Duct Cover – 1
 Screw Package for Duct Cover – 1


Model No. CH0048DC-12 for 48" hood
 KOBE Duct Cover – 1
 Screw Package for Duct Cover – 1



**RA-02 Series
RANGE HOOD BOX
(BOX 1 OF 2)**

- {A} KOBE Range Hood – 1
- {B} Warranty Registration Card – 1
- {C} Instructions Manual – 1
- {D} Oil Tunnel – 1
- {E} Baffle Filter
 - 2 (30" & 36")
 - 3 (42" & 48")
- {F} Spacer – 2
- {G} 8" Round Exhaust Plate – 1
(42" & 48" only)
- {H} Screws Package – 1
- {I} Hood-Mounting Bracket – 1
- {J} Screws Package – 1

{A}



{B}




{C}



{D}



{E}



{F}



{G}



{H}

30" & 36"



Baffle Handle (4 pc)

M4 x 8mm (8 pc)

42" & 48"



Baffle Handle (6 pc)

M4 x 8mm (12 pc)

{I}



* Attached to Hood

{J}




4 x 8 mm (4)

**BOX 2 OF 2
ITEM NO.: RA02DC**

{K} Duct Cover

{K}



- FOR MORE INFORMATION, PLEASE VISIT OUR WEBSITE www.KOBERangeHoods.com OR CONTACT KOBE RANGE HOODS AT (626) 775-8880.


INSTALLATION

PLEASE READ ENTIRE INSTRUCTIONS BEFORE PROCEEDING



Calculation before Installation

Calculate the length of the installation, before installing the hood. (All calculation is measure in inches.)

- FOR UNDER THE CABINET -
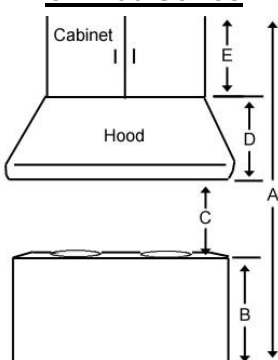
<p>TABLE 1</p> <p>A = Height of Floor to Ceiling B = Height of Floor to Counter Top (Standard: 36") C = Preferred Height of Counter Top to Hood Bottom (Recommended 30" to 36") D = Height of Hood E = Height of the Cabinet</p>	<p>CH-100 Series</p> 
---	--

- FOR STAND ALONE -
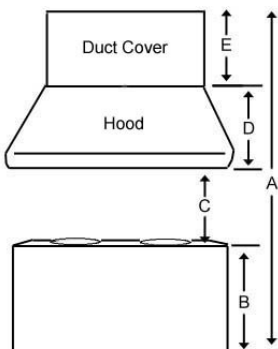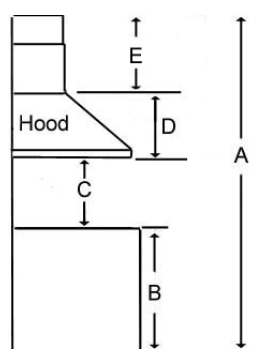
<p>TABLE 2</p> <p>A = Height of Floor to Ceiling B = Height of Floor to Counter Top (Standard: 36") C = Preferred Height of Counter Top to Hood Bottom (Recommended 30" to 36") $[(A - B) - (D + E)]$ D = Height of Hood E = Height of Duct Cover</p>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>CH-100 Series</p>  </div> <div style="text-align: center;"> <p>RA-02 Series</p>  </div> </div>
--	--

 **SAFETY WARNING**

HOOD MAY HAVE VERY SHARP EDGES; PLEASE WEAR PROTECTIVE GLOVES IF IT IS NECESSARY TO REMOVE ANY PARTS FOR INSTALLING, CLEANING OR SERVICING.

NOTE: BE CAREFUL WHEN USING ELECTRICAL SCREWDRIVER, DAMAGE TO THE HOOD MAY OCCUR.

CH-100 SERIES – UNDER THE CABINET INSTALLATION 7
CH-100 SERIES – STAND ALONE INSTALLATION 9
RA-02 SERIES - INSTALLATION 12

CH-100 SERIES – UNDER THE CABINET INSTALLATION

Preparation before Installation

NOTE: TO AVOID DAMAGE TO YOUR HOOD, PREVENT DEBRIS FROM ENTERING THE VENT OPENING.

- ◆ Decide the location of the venting pipe from the hood to the outside. Refer to Figure 1.
- ◆ A straight, short venting run will allow the hood to perform more efficiently.
- ◆ Try to avoid as many transitions, elbows, and long run as possible. This may reduce the performance of the hood.
- ◆ Temporarily wire the hood to test for proper operation before installing.
- ◆ **Important: Peel protective film off the hood (if any).**
- ◆ For installing under the cabinet with recessed bottom, attach 4-inch wide wood filler strips (not included) on each side. Refer to Figure 2.
- ◆ Measure and create access opening for electrical wires under the cabinet.

Hood Installation

CAUTION: If required to move the cooking range to install the hood, turn off the power on an electric range at the main electrical box. SHUT OFF THE GAS BEFORE MOVING A GAS RANGE.

1. Puncture the knockout holes on the hood as shown in Figure 3.
2. (This step only applies to 42" and 48" models.) Attach exhaust plate on hood with four (3/16" x 3/8") screws (included). Shown in Figure 4.
3. Using references on Table 1 and measurements on page 19 center the hood in place beneath the cabinet and flush with the front of the cabinet.
4. Draw electrical wires through cabinet access opening. Refer to Figure 6.
5. From the bottom of the hood, place screw (not provided) into the exact center of each knockout hole. Make sure all screws are in place before tightening screws. **CAUTION: MAKE SURE THE HOOD IS SECURE BEFORE RELEASING.**
6. For safety purpose, pre-drilled mounting holes are provided through the back of the hood. For a more secure installation, use as many mounting holes as needed to secure from the inside of hood (screws not included).

Figure 1

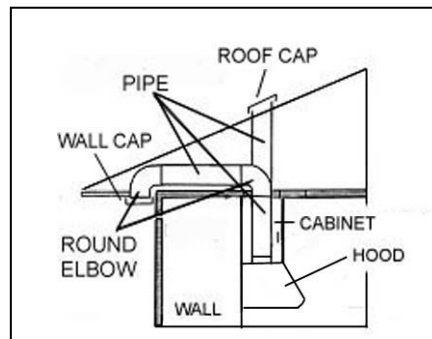


Figure 2

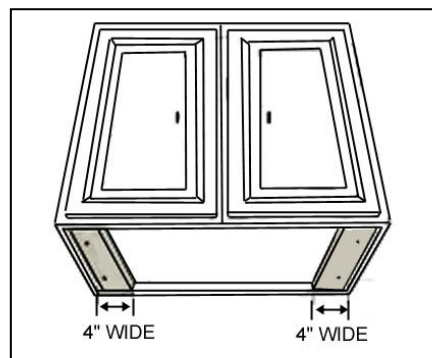


Figure 3


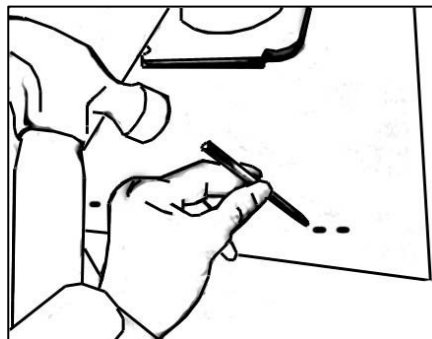


Figure 4

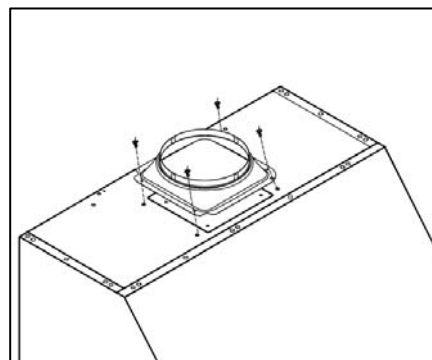

Ductwork Installation

7. Use 6" round steel pipe for 30" and 36" models or 8" round steel pipe for 42" and 48" models (follow building codes in your area) to connect the exhaust on the hood to the ductwork above. Use duct tape to make all joints secure and air tight. Refer to Figure 5.

Wiring to Power Supply



SAFETY WARNING

RISK OF ELECTRICAL SHOCK. THIS RANGE HOOD MUST BE PROPERLY GROUNDED. MAKE SURE THIS IS DONE BY SPECIALIZED ELECTRICIAN IN ACCORDANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL CODES. BEFORE CONNECTING WIRES, SWITCH POWER OFF AT SERVICE PANEL AND LOCK SERVICE PANEL TO PREVENT POWER FROM BEING SWITCHED ON ACCIDENTALLY.

8. Connect the electrical wires.
 - Connect three wires (black, white and green) to house wires and cap with wire connectors. Connect according to color: black to black, white to white, and green to green as shown on Figure 6.
 - If necessary to hide the electrical wire connections, push wires back into the wiring box. Access the wire connections underneath the hood. To prevent any damage, make sure wires do not slip between motor or any moving parts.

Install Accessories

9. Attach Oil Tunnel. Refer to Figure 7.
10. Refer to Figure 8. ① Slide the baffle filter into the hood. ② Push the baffle filter upward. ③ Slide forward. ④ Pull downward. ⑤ Fit into place.
11. Repeat until all baffle filters and spacers are resting against oil tunnel. Refer to page 20.
12. Install heat lamps (not included), 120 Volts 175 Watts max. each.

Final Assembly

13. Turn power ON in control panel. Check all lights and fan operation.
14. Make sure to leave this manual for the homeowner.

Figure 5

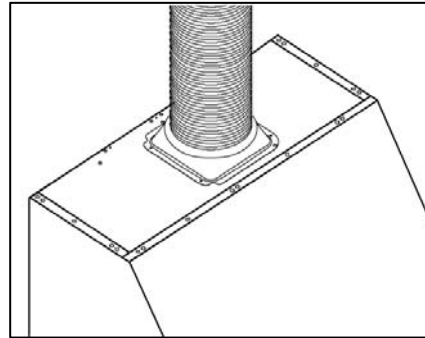


Figure 6

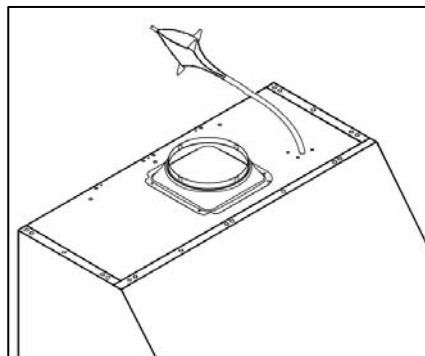


Figure 7


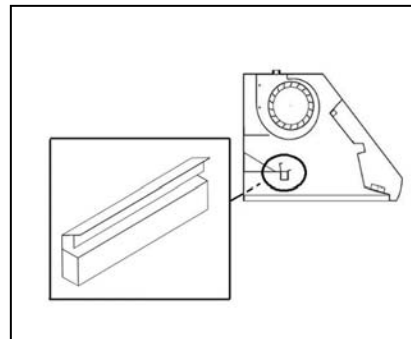


Figure 8

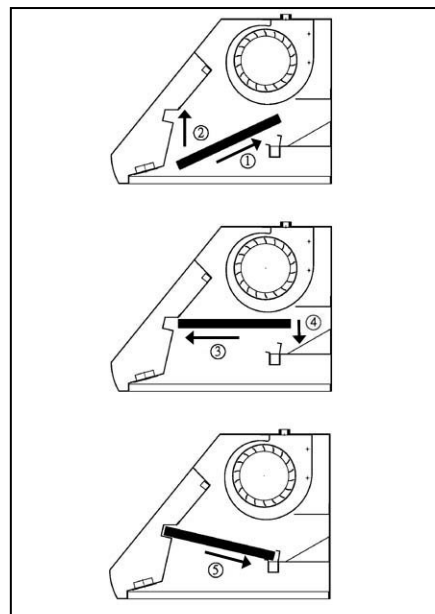

CH-100 SERIES – STAND ALONE INSTALLATION

***This installation only applies with the purchase of an optional duct cover:

Preparation before Installation

NOTE: TO AVOID DAMAGE TO YOUR HOOD, PREVENT DEBRIS FROM ENTERING THE VENT OPENING.

- ◆ Decide the location of the venting pipe from the hood to the outside. Refer to Figure 9.
- ◆ A straight, short venting run will allow the hood to perform more efficiently.
- ◆ Try to avoid as many transitions, elbows, and long run as possible. This may reduce the performance of the hood.
- ◆ Temporarily wire the hood to test for proper operation before installing.
- ◆ **Important: Peel protective film off the hood and the duct cover (if any).**
- ◆ If necessary, prepare back wall frame with cross framing lumber for secure installation.
- ◆ Using references on Table 2 and measurements on page 19-20, decide the level of the lumber. Refer to Figure 10.

Hood Installation

CAUTION: If required to move the cooking range to install the hood, turn off the power on an electric range at the main electrical box. **SHUT OFF THE GAS BEFORE MOVING A GAS RANGE.**

1. (This step only applies to 42" and 48" models.) Attach exhaust plate on hood with four (3/16" x 3/8") screws (included). Shown in Figure 11.
2. If necessary, remove the rubber stand on the back of the hood and discard.
3. Use twelve (3/16" x 3/8") screws (included) to attach the two hood-mounting brackets (included) to the back of the hood. Refer to Figure 12.
4. Using references in Table 2 on page 5 and Measurements and Diagrams on pages 19-20, mark the leveling point of the hood. Position two mounting screws (not included) on the wall, leaving 1/8" away from the wall. Refer to Figure 13.

Figure 9

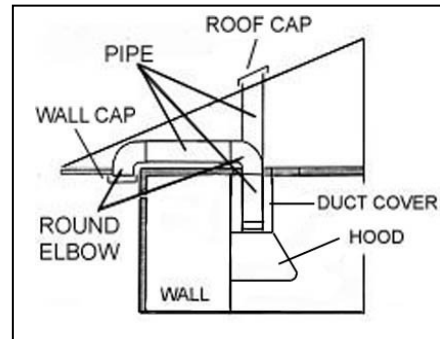


Figure 10

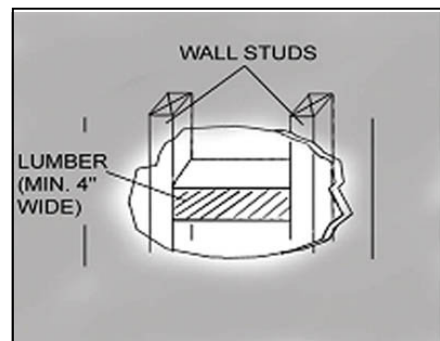


Figure 11


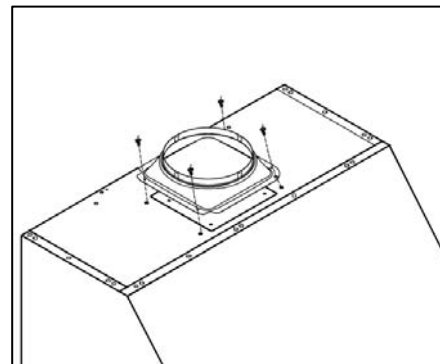


Figure 12



5. Align hood-mounting bracket to the two screws on the wall and hook hood into place. Tighten screws to secure hood to the wall.
6. For safety purpose, pre-drilled mounting holes are provided through the back of the hood. For a more secure installation, use as many mounting holes as needed to secure from the inside of hood (screws not included).

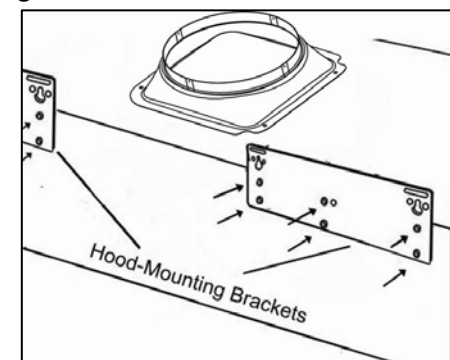

CAUTION: MAKE SURE HOOD IS SECURE BEFORE RELEASING.

Wiring to Power Supply



SAFETY WARNING

RISK OF ELECTRICAL SHOCK. THIS RANGE HOOD MUST BE PROPERLY GROUNDED. MAKE SURE THIS IS DONE BY SPECIALIZED ELECTRICIAN IN ACCORDANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL CODES. BEFORE CONNECTING WIRES, SWITCH POWER OFF AT SERVICE PANEL AND LOCK SERVICE PANEL TO PREVENT POWER FROM BEING SWITCHED ON ACCIDENTALLY.

7. Connect the electrical wires.
 - Connect three wires (black, white and green) to house wires and cap with wire connectors. Connect according to color: black to black, white to white, and green to green as shown on Figure 14.
 - If necessary to hide the electrical wire connections, push wires back into the wiring box. Access the wire connections underneath the hood. To prevent any damage, make sure wires do not slip between motor or any moving parts.

Figure 13


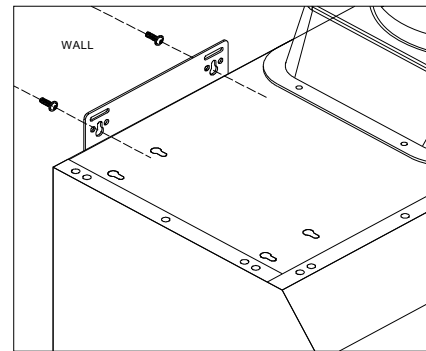



Figure 14

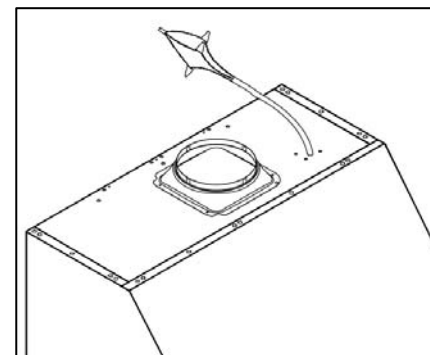

Duct Cover Installation

- Use 6" round steel pipe for 30" and 36" models or 8" round steel pipe for 42" and 48" models (follow building codes in your area) to connect the exhaust on the hood to the ductwork above. Use duct tape to make all joints secure and air tight. Refer Figure 15. Slide the duct cover onto the hood.
- Use 3/16" x 3/8" screws (included) to attach duct cover to hood.


Figure 15

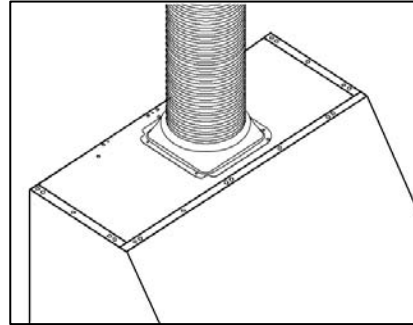

Install Accessories

- Attach oil tunnel. Refer to Figure 16.
- Refer to Figure 17. ① Slide the baffle filter into the hood. ② Push the baffle filter upward. ③ Slide forward. ④ Pull downward. ⑤ Fit into place.
- Repeat until all baffle filters and spacers are resting against oil tunnel. Refer to page 20.
- Install heat lamps (not included), 120 Volts 175 Watts max. each.


Figure 16

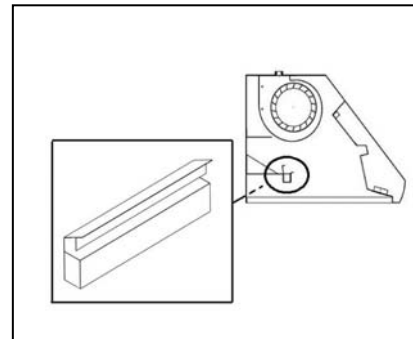

Final Assembly

- Turn power ON in control panel. Check all lights and fan operation.
- Make sure to leave this manual for the homeowner.

Figure 17

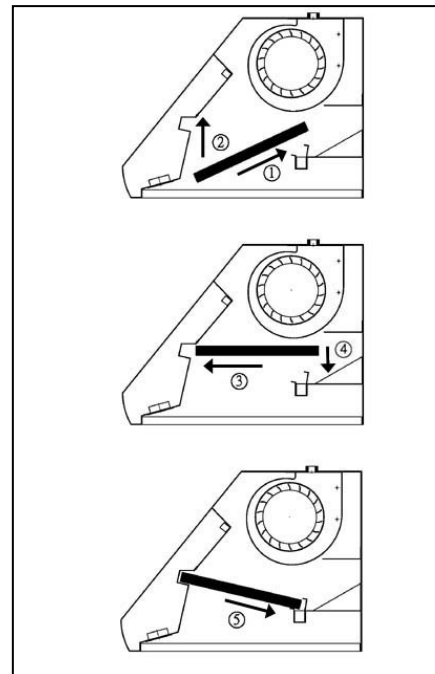

RA-02 SERIES - INSTALLATION

Preparation before Installation

NOTE: TO AVOID DAMAGE TO YOUR HOOD, PREVENT DEBRIS FROM ENTERING THE VENT OPENING.

- ◆ Decide the location of the venting pipe from the hood to the outside. (Figure 18)
- ◆ A straight, short venting run will allow the hood to perform more efficiently.
- ◆ Try to avoid as many transitions, elbows, and long run as possible. This may reduce the performance of the hood.
- ◆ Temporarily wire the hood to test for proper operation before installing
- ◆ **Important: Peel protective film off the hood and the duct cover (if any).**
- ◆ If necessary, prepare back wall frame with cross framing lumber for secure installation. Refer to Table 2 and measurements on Page 21 to decide the level of the lumber. (Figure 19)
- ◆ Loosen hood-mounting brackets at the back of the hood, adjust brackets and tighten screws as shown in Figure 20.
- ◆ If necessary, remove the rubber stand on the back of the hood and discard. (Figure 21)

Figure 19

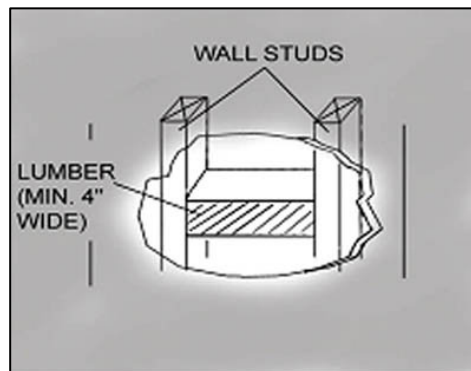


Figure 20

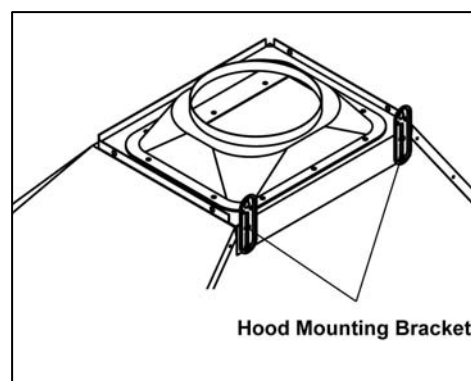


Figure 18


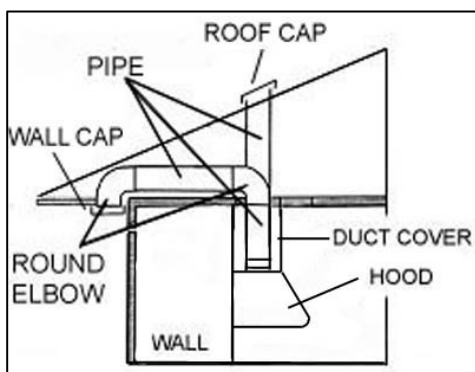


Figure 21

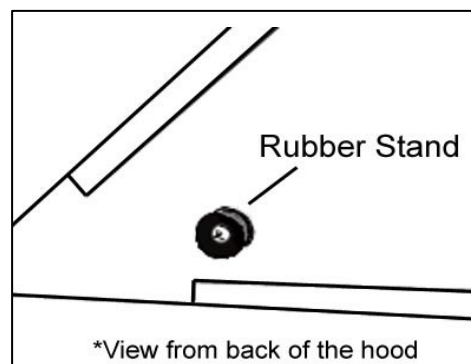

Hood Installation

CAUTION: If required to move the cooking range to install the hood, turn off the power on an electric range at the main electrical box. **SHUT OFF THE GAS BEFORE MOVING A GAS RANGE.**

1. Using references in Table 2 and measurements on Page 21, mark the leveling locations point for hood-mounting bracket on the wall.
2. Secure two mounting screws (not provided) to the wall, leaving an 1/8" space from the wall. (Figure 22)
3. Align the hood-mounting bracket to the mounting screws on the wall and hang hood into place.
4. Secure and tighten the mounting screws.

CAUTION: MAKE SURE HOOD IS SECURE BEFORE RELEASING.

Wiring to Power Supply

SAFETY WARNING

RISK OF ELECTRICAL SHOCK. THIS RANGE HOOD MUST BE PROPERLY GROUNDED. MAKE SURE THIS IS DONE BY SPECIALIZED ELECTRICIAN IN ACCORDANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL CODES. BEFORE CONNECTING WIRES, SWITCH POWER OFF AT SERVICE PANEL AND LOCK SERVICE PANEL TO PREVENT POWER FROM BEING SWITCHED ON ACCIDENTALLY.

5. Connect the electrical wires.
 - Connect three wires (black, white and green) to house wires and cap with wire connectors. Connect according to color: black to black, white to white, and green to green as shown on Figure 23.
 - If necessary to hide the electrical wire connections, push wires back into the wiring box. Access the wire connections underneath the hood. To prevent any damage, make sure wires do not slip between motor or any moving parts.

Figure 22

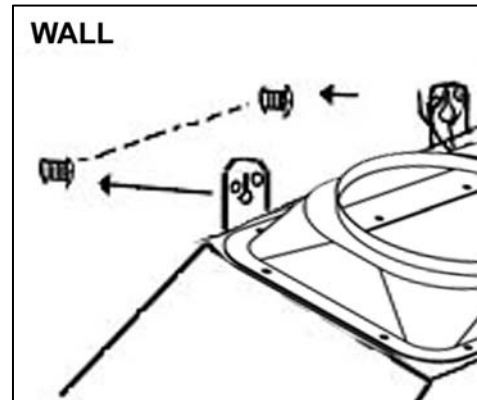


Figure 23

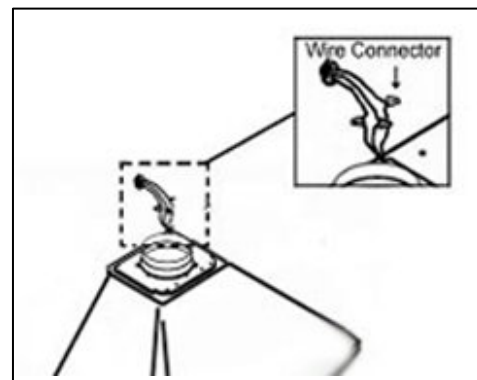


Figure 24


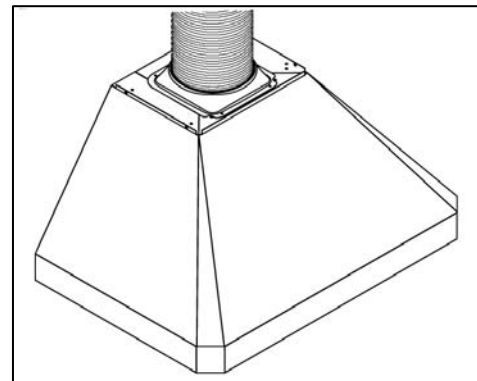


Figure 25

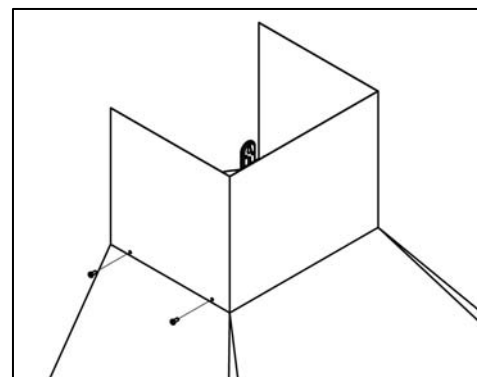

Duct Cover Installation

6. Use 6" round steel pipe for 30" and 36" models or 8" round steel pipe for 42" and 48" models (follow building codes in your area) to connect the exhaust on the hood to the ductwork above. Use duct tape to make all joints secure and air tight. Refer Figure 24.
7. Use four 4mm x 8mm screws (included) to attach duct cover to hood. Refer to Figure 25.

Install Accessories

8. Attach oil tunnel. Refer to Figure 26.
9. Refer to Figure 27. ① Slide the baffle filter into the hood. ② Push the baffle filter upward. ③ Slide forward. ④ Pull downward. ⑤ Fit into place.
10. Repeat until all baffle filters and spacers are resting against oil tunnel. Refer to page 21.

Final Assembly

11. Turn power ON in control panel. Check all lights and fan operation.
12. Make sure to leave this manual for the homeowner.

Figure 26


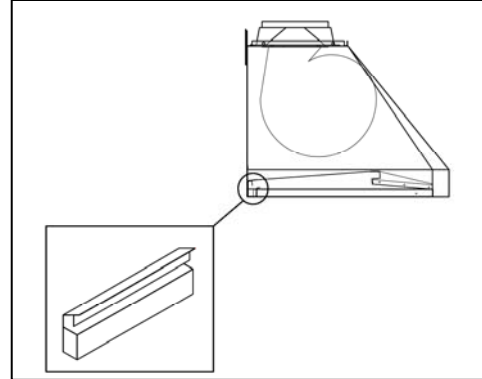


Figure 27

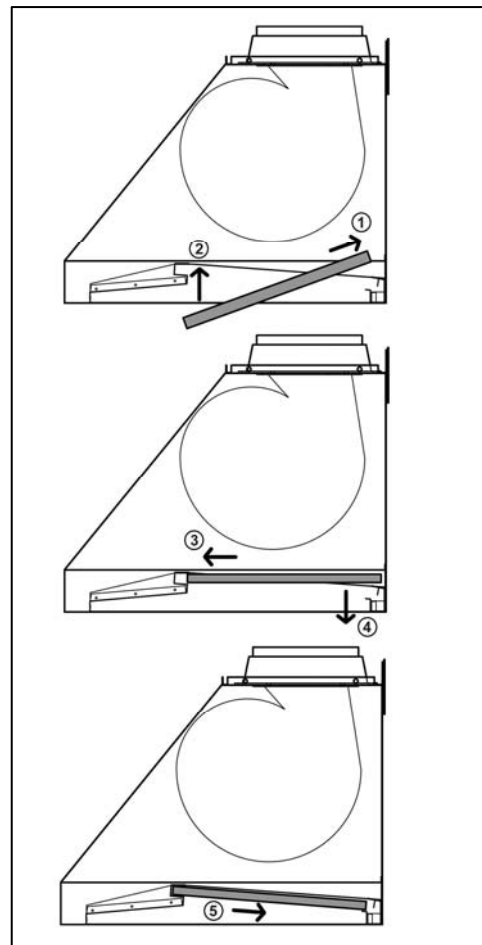


OPERATION INSTRUCTIONS

This KOBE hood is equipped with two rotary controls with powerful centrifugal squirrel cage, baffle filters, and bright LED lights.

The two rotary controls are Light Control & Speed Control. Refer to Figure 28.

Figure 28

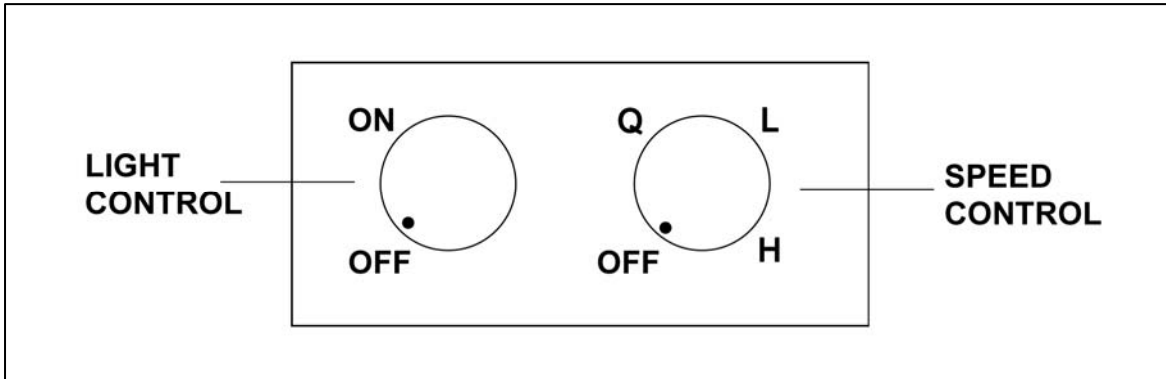

Note: For best results, turn hood to QuietMode™ prior to preparation or cooking to establish airflow in the kitchen. Adjust speed as needed.

- Rotate the Speed Control clockwise to cycle from QuietMode™, Low, High, and Off; and rotate counterclockwise to cycle from High, Low, QuietMode™, and off
- Rotate the Light Control clockwise to turn on the light.

For CH-100 Series only

- Press the back Red button to turn on heat lamps.
(Note: Heat lamps are sold separately. Heat lamps required 120-volt, 175-watt.)

MAINTENANCE

For the optimal level of operation, clean the range hood surface and baffles regularly.

To Clean Hood Surface

CAUTION: NEVER USE ABRASIVE CLEANERS, PADS, OR CLOTHS.

*** Regular care will help preserve its fine appearance.

1. Use only mild soap or detergent solutions. Dry surfaces using soft cloth.
2. If hood looks splotchy (stainless steel hood), use an orange base cleaner to clean the surface of the hood. Avoid cleaner to get on the control switches. Only spread a light coating over the surface of the hood and leave on for a few minutes (do not leave on too long or this may cause damage to hood finish). Use soft towel to wipe off the cleaning solution, gently rubs any stubborn spots. Use a slightly damp towel to get rid of any cleaning solution. Use dry soft towel to dry the hood.
3. To bring the glow back into a stainless steel finish, use a stainless steel cleaner.
4. DO NOT allow deposits to remain for long periods of time.
5. DO NOT use ordinary steel wool or steel brushes. Small bits of steel may adhere to the surface causing rust.
6. DO NOT allow salt solutions, disinfectants, bleaches, or cleaning compounds to remain in contact with stainless steel for extended periods. Many of these compounds contain chemicals, which may be harmful. Rinse with water after exposure and wipe dry with a clean cloth.

To Clean Baffle Filters & Oil Tunnel

CAUTION: DRAIN BAFFLE FILTERS AND OIL TUNNEL BEFORE OIL WILL OVERFLOW.

1. Remove the baffle filters and oil tunnel..
2. Using a sponge, wash with warm soapy water. Dry completely before returning into place.
(Note: Baffle Filters are top rack dishwasher safe.)

SPECIFICATIONS

CH-100 Series

MODEL / SIZE	CH0030SQB-1 / 30" / Single Blower CH0036SQB-1 / 36" / Single Blower CH0042SQB-1 / 42" / Dual Blowers CH0048SQB-1 / 48" / Dual Blowers		
COLOR	Commercial Grade Stainless Steel		
CONSUMPTION / AMPERE	CH0030SQB-1 – 700W / 6A CH0036SQB-1 – 700W / 6A CH0042SQB-1 – 700W / 6A CH0048SQB-1 – 700W / 6A		
VOLTAGE	120V 60Hz		
NUMBER OF BLOWER	1 – 30", 36" 2 – 42", 48"		
DESIGN	18-Gauge Seamless / Satin Finish		
FAN TYPE: CENTRIFUGAL	Squirrel Cage		
EXHAUST	Top 6" Round – 30", 36" Top 8" Round – 42", 48"		
CONTROLS	Rotary Switch		
LIGHTS	3-Watt LED x 2 – 30", 36" 3-Watt LED x 3 – 42", 48"		
HOOD DIMENSION (W x D x H)	(CH0030SQB-1) 29-3/4" x 24" x 18" (CH0036SQB-1) 35-3/4" x 24" x 18" (CH0042SQB-1) 41-3/4" x 24" x 18" (CH0048SQB-1) 47-3/4" x 24" x 18"		
OPTIONAL ACCESSORIES (W x D x H)	1) Duct Cover: Model No. CH0030DC-12 (30" x 12" x 12") Model No. CH0036DC-12 (36" x 12" x 12") Model No. CH0042DC-12 (42" x 12" x 12") Model No. CH0048DC-12 (48" x 12" x 12") 2) Model No. SSP30 30" Stainless Steel Back Panel (30" x 1/10" x 32") 3) Model No. SSP36 36" Stainless Steel Back Panel (36" x 1/10" x 32")		
HOOD WEIGHT (lbs)		Net	Gross
	(CH0030SQB-1)	60.0	78.0
	(CH0036SQB-1)	67.0	87.0
	(CH0042SQB-1)	86.0	108.0
	(CH0048SQB-1)	93.0	117.0
SPEED		QuietMode™	Low
<u>SINGLE BLOWER</u>			High
CH0030SQB-1	Air Capacity (cfm)	300	580
CH0036SQB-1	Sone*	1.8	4.7
<u>DUAL BLOWERS</u>			
CH0042SQB-1	Air Capacity (cfm)	450	800
CH0048SQB-1	Sone*	2.5	6.0

*One sone is equivalent to the sound of a refrigerator at 40 decibels.

**Specifications subject to change without notice.

RA-02 Series

MODEL / SIZE

RA0230SQB-1 / 30" / Single Blower
 RA0236SQB-1 / 36" / Single Blower
 RA0242SQB-1 / 42" / Dual Blowers
 RA0248SQB-1 / 48" / Dual Blowers

COLOR

Commercial Grade Stainless Steel

CONSUMPTION / AMPERE

RA0230SQB-1 – 350W / 3A
 RA0236SQB-1 – 350W / 3A
 RA0242SQB-1 – 350W / 3A
 RA0248SQB-1 – 350W / 3A

VOLTAGE

120V 60Hz

NUMBER OF BLOWER

1 – 30", 36"
 2 – 42", 48"

DESIGN

18-Gauge Seamless / Satin Finish

FAN TYPE: CENTRIFUGAL

Squirrel Cage

EXHAUST

Top 6" Round – 30", 36"
 Top 8" Round – 42", 48"

CONTROLS

Rotary Switch

LIGHTS

3-Watt LED x 2 – 30", 36"
 3-Watt LED x 3 – 42", 48"

**HOOD DIMENSION
 (W x D x H)**

(RA0230SQB-1) 29-3/4" x 24" x 18"
 (RA0236SQB-1) 35-3/4" x 24" x 18"
 (RA0242SQB-1) 41-3/4" x 24" x 18"
 (RA0248SQB-1) 47-3/4" x 24" x 18"

**OPTIONAL ACCESSORIES
 (W x D x H)**

- 1) **Model No. RA02DC-24**
 1-Piece Extension Duct Cover (15" x 12" x 24-1/2")
- 2) **Model No. SSP30**
 30" Stainless Steel Back Panel (30" x 1/10" x 32")
- 3) **Model No. SSP36**
 36" Stainless Steel Back Panel (36" x 1/10" x 32")

	<u>Net</u>	<u>Gross</u>	
HOOD WEIGHT (lbs)	(RA0230SQB-1)	46	66
	(RA0236SQB-1)	53	73
	(RA0242SQB-1)	65	87
	(RA0248SQB-1)	72	94
	RA02DC	5	7

SPEED		QuietMode™	Low	High
<u>SINGLE BLOWER</u>				
RA0230SQB-1	Air Capacity (cfm)	300	580	760
RA0236SQB-1	Sone*	1.8	4.7	5.4
<u>DUAL BLOWERS</u>				
RA0242SQB-1	Air Capacity (cfm)	450	800	1100
RA0248SQB-1	Sone*	2.5	6.0	8.0

*One sone is equivalent to the sound of a refrigerator at 40 decibels.

**Specifications subject to change without notice.


MEASUREMENTS & DIAGRAMS

- ◆ All measurements in () are millimeters.
- ◆ All inch measurements are converted from millimeters. Inch measurements are estimated.


CH-100 Series

MODEL NO.: CH0030SQB-1 (30")
 CH0036SQB-1 (36")
 CH0042SQB-1 (42")
 CH0048SQB-1 (48")

- FOR UNDER THE CABINET -

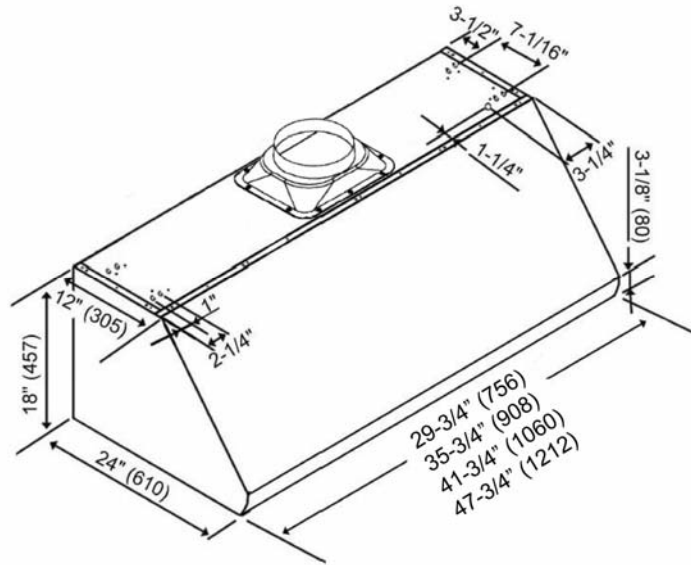

- FOR STAND ALONE -

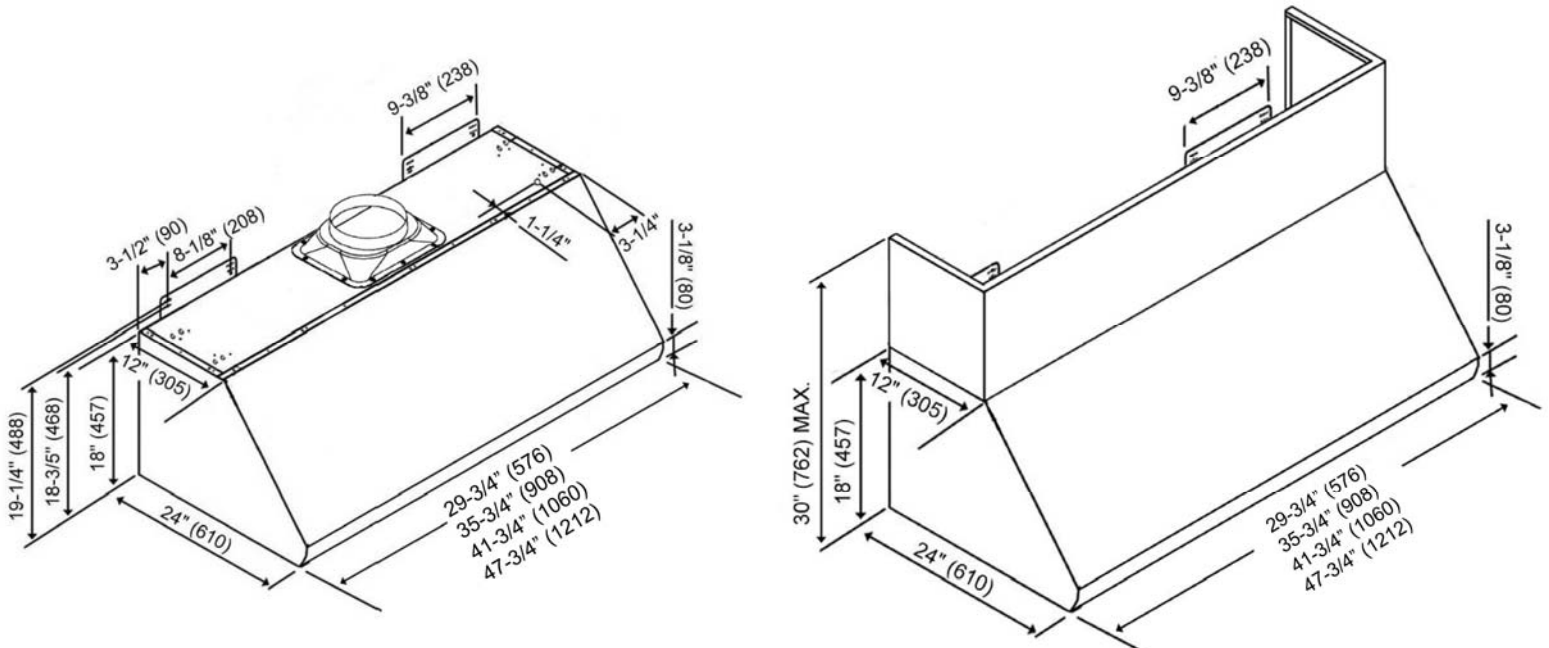


- FOR STAND ALONE (WITH OPTIONAL DUCT COVER) -


CH-100 Series

- MODEL NO.:** CH0030SQB-1 (30")
 CH0036SQB-1 (36")
 CH0042SQB-1 (42")
 CH0048SQB-1 (48")


*****Hood-Mounting Bracket**

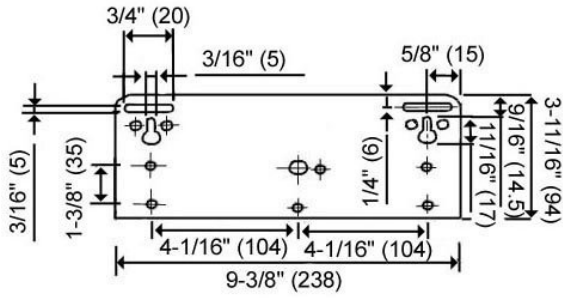

*****Rear Knockout Holes**

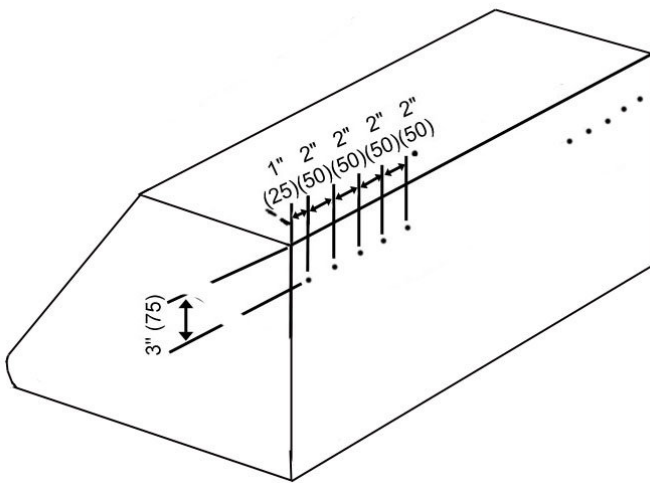



BAFFLE FILTERS & BOTTOM CASINGS

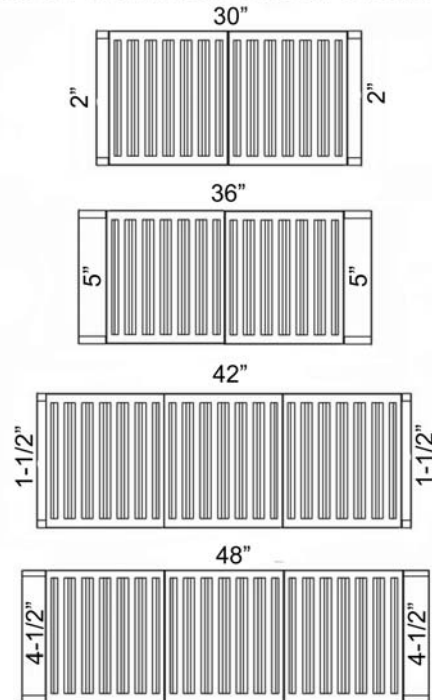


- ◆ All measurements in () are millimeters.
- ◆ All inch measurements are converted from millimeters. Inch measurements are estimated.

RA-02 Series

MODEL NO.: RA0230SQB-1 (30")
 RA0236SQB-1 (36")
 RA0242SQB-1 (42")
 RA0248SQB-1 (48")

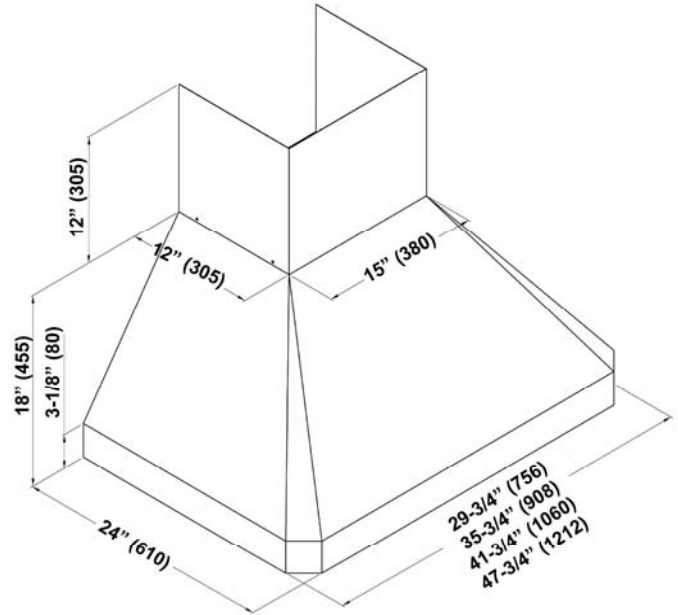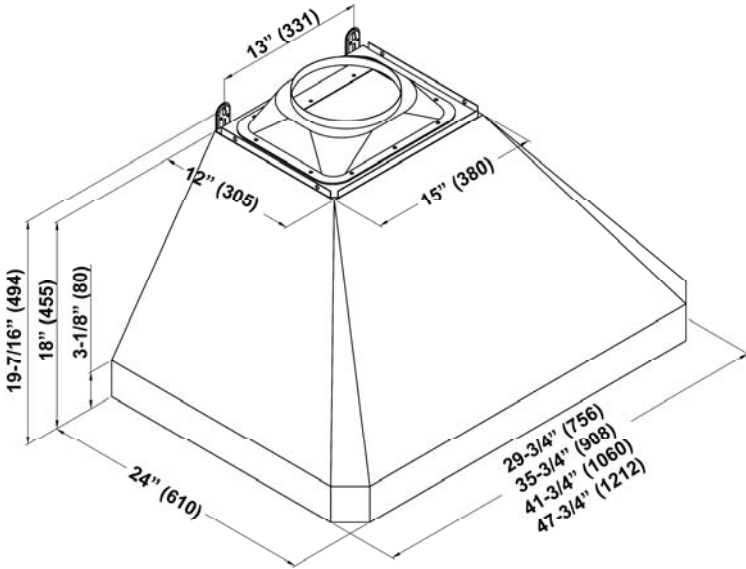

BAFFLE FILTERS & BOTTOM CASINGS

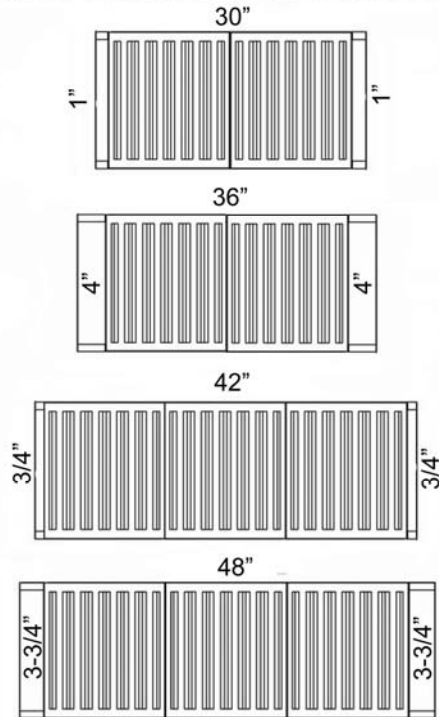

PARTS LIST

CH-100 Series

MODEL NO.: CH0030SQB-1 (30")
 CH0036SQB-1 (36")
 CH0042SQB-1 (42")
 CH0048SQB-1 (48")

NO.	DESCRIPTION	MODEL /SIZE	PART NO.
1	Screw (3/16" x 3/8")		C1-0707-0001
2	Hood Mounting Bracket		C1-0221-0330
3	6" Round Plastic Exhaust	CH0030SQB-1 / CH0036SQB-1	C1-0505-0001
	8" Round Exhaust Plate	CH0042SQB-1 / CH0048SQB-1	C1-0606-0101
4	Hood Casing	CH0030SQB-1	B101-2130-02
		CH0036SQB-1	B101-2136-02
		CH0042SQB-1	B101-2142-02
		CH0048SQB-1	B101-2148-02
5	Heat Lamp Socket Cover		C1-0204-2130
6	Heat Lamp Socket		C1-0414-0120
7	Motor Mounting Bracket	CH0030SQB-1 / CH0036SQB-1	C1-0105-2100-L
		CH0042SQB-1 / CH0048SQB-1	C1-0105-2142-L
8	Air Chamber & Motor	CH0030SQB-1 / CH0036SQB-1	C1-0302-A110-06
		CH0042SQB-1 / CH0048SQB-1	C1-0302-A120-01
9	Safety Screen	CH0030SQB-1 / CH0036SQB-1	C1-0302-A110-06-C
		CH0042SQB-1 / CH0048SQB-1	C1-0302-A120-01-C
10	LED Light		C1-0403-0306
11	Capacitor Panel	CH0030SQB-1	C1-0201-2130
		CH0036SQB-1	C1-0201-2136
		CH0042SQB-1	C1-0201-2142
		CH0048SQB-1	C1-0201-2148
12	Light Transformer		C1-0402-D001
13	Capacitor	CH0030SQB-1 / CH0036SQB-1	C1-0401-A250-22
		CH0042SQB-1 / CH0048SQB-1	C1-0401-A300-08
14	Valve Stem		C1-0405-0404-B
15	Knob		C1-0405-0400-A
16	Spacer		
A	2" wide	CH0030SQB-1	B101-2130-09
B	5" wide	CH0036SQB-1	B101-2136-09
C	1-1/2" wide	CH0042SQB-1	B101-2142-09
D	4-1/2" wide	CH0048SQB-1	B101-2148-09
17	Baffle Filter		B101-2130-15
18	Oil Tunnel	CH0030SQB-1	B101-2130-14
		CH0036SQB-1	B101-2136-14
		CH0042SQB-1	B101-2142-14
		CH0048SQB-1	B101-2148-14





(Optional Duct Cover)

ORIGINAL KIT			
NO.	DESCRIPTION	MODEL /SIZE	PART NO.
01	Duct Cover	CH0030DC-12	B102-6012-030
		CH0036DC-12	B102-6012-036
		CH0042DC-12	B102-6012-042
		CH0048DC-12	B102-6012-048
02	Screw (3/16" x 3/8")		C1-0707-0001

CH-100 Series




MODEL NO.: CH0030SQB-1 (30")

CH0036SQB-1 (36")

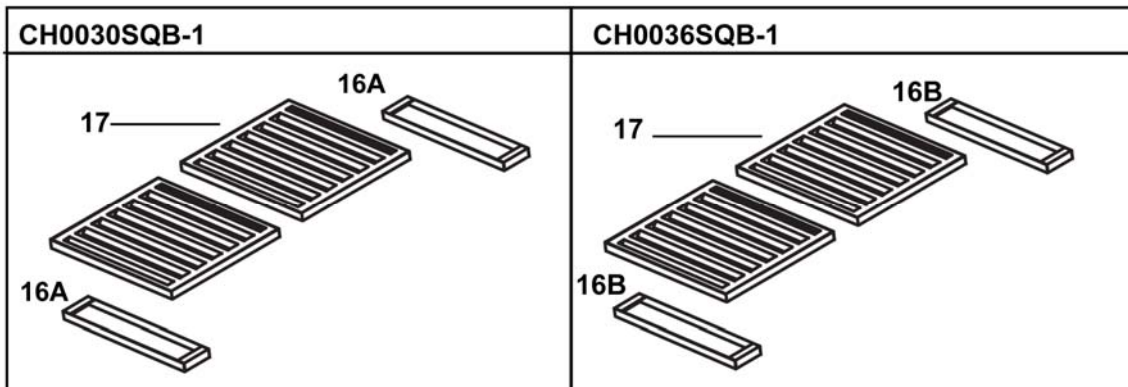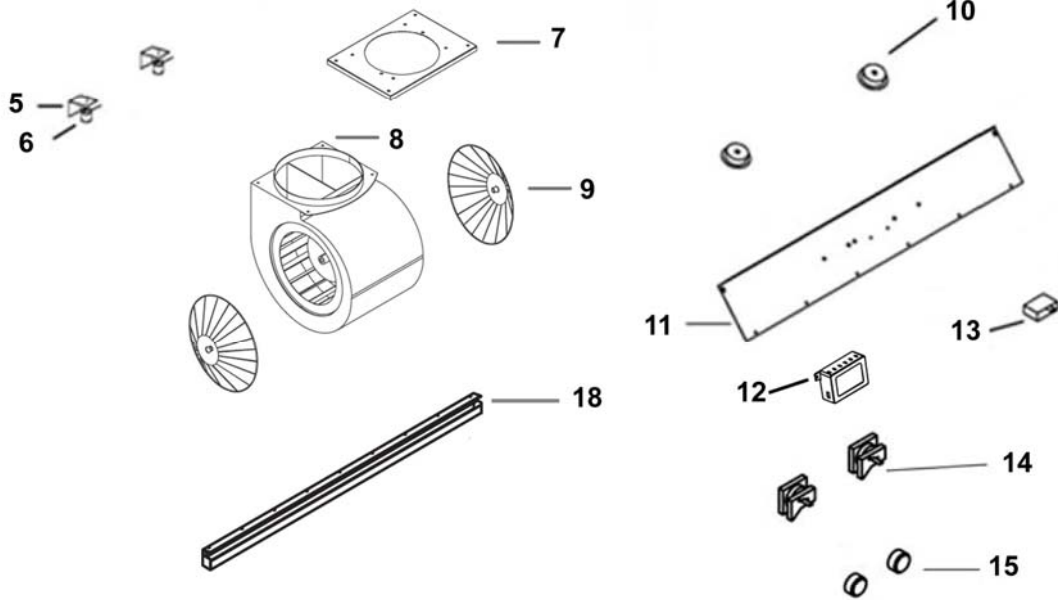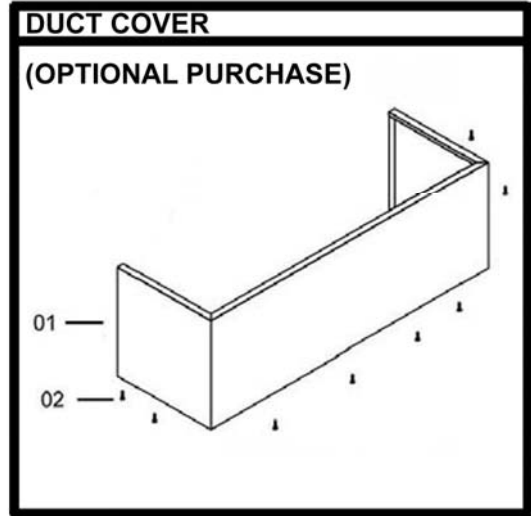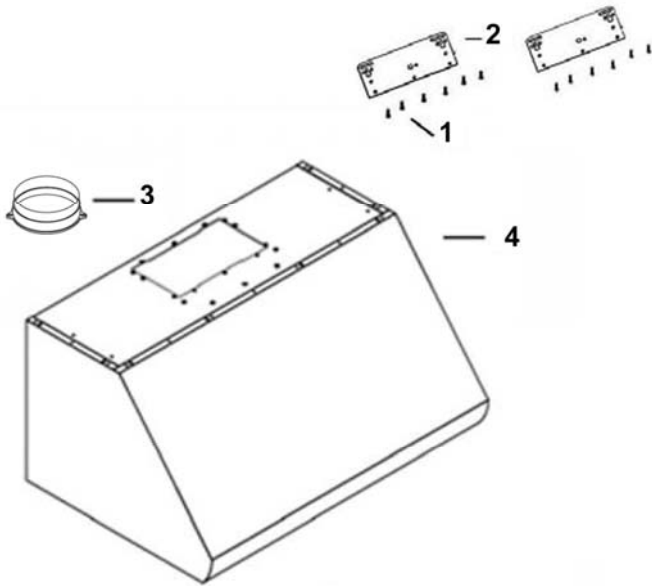

CH-100 Series

MODEL NO.: CH0042SQB-1 (42")
 CH0048SQB-1 (48")

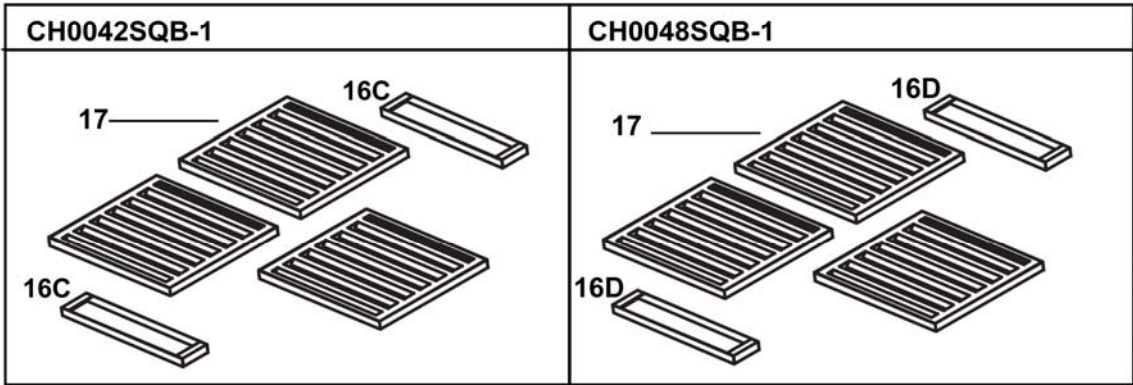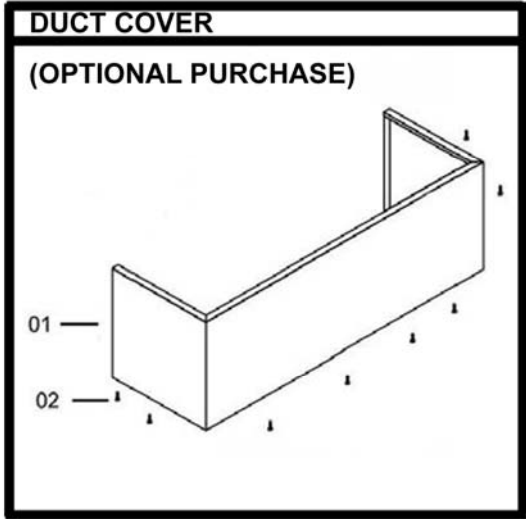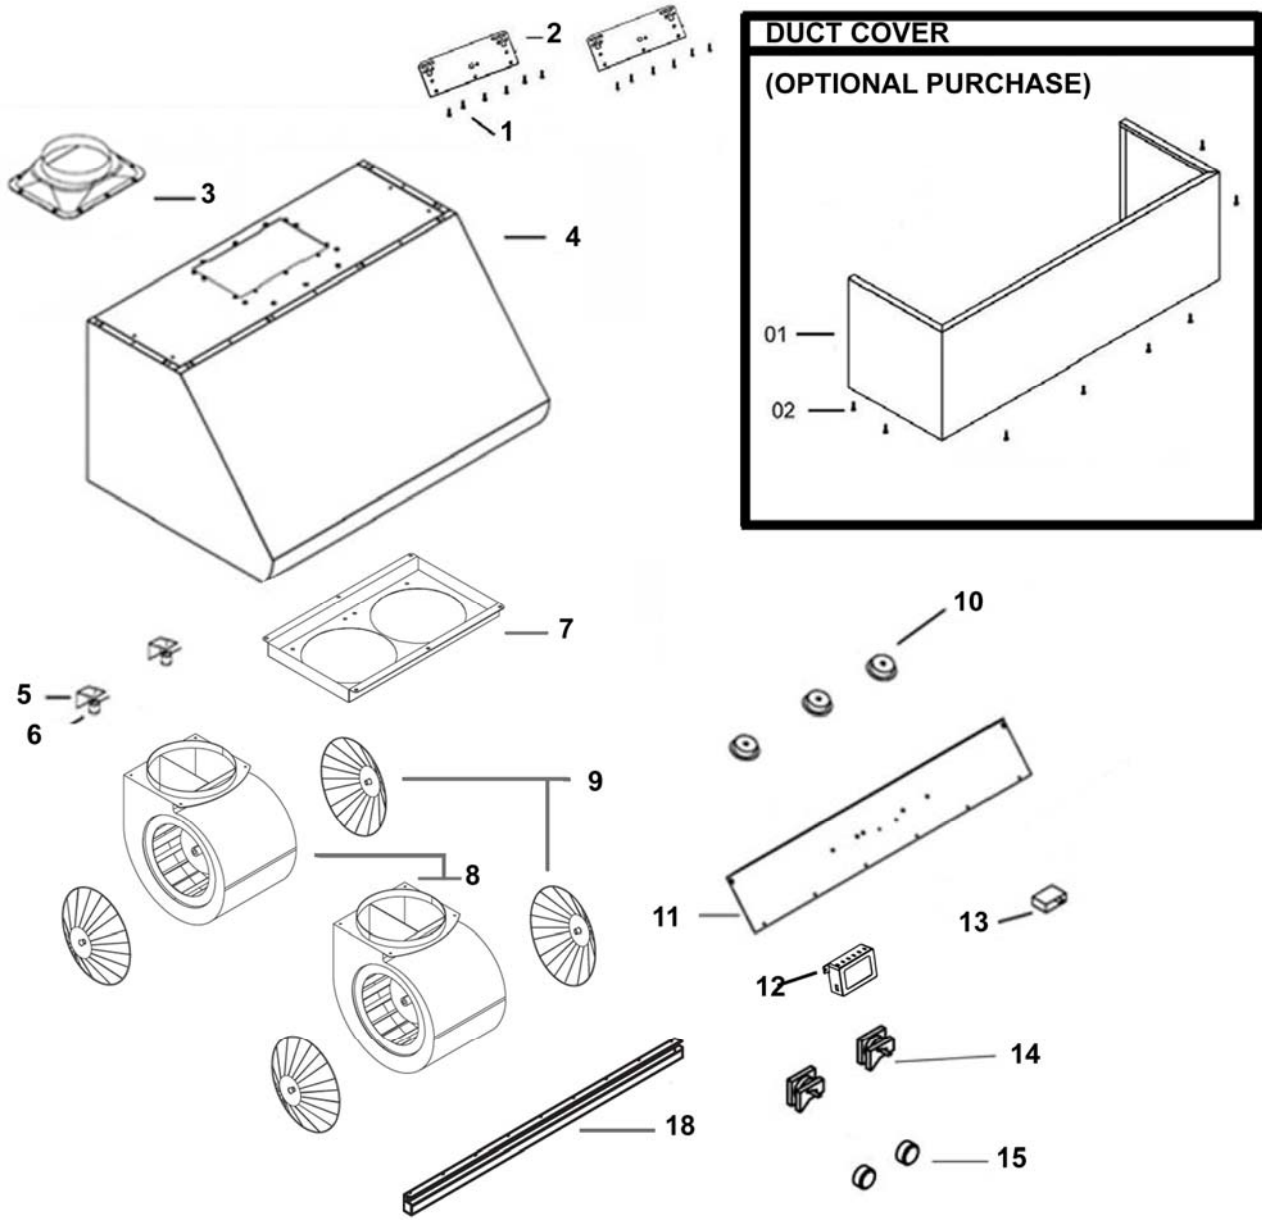



RA-02 Series

MODEL NO.: RA0230SQB-1 (30")
RA0236SQB-1 (36")
RA0242SQB-1 (42")
RA0248SQB-1 (48")

NO.	DESCRIPTION	MODEL /SIZE	PART NO.
1	6" Round Plastic Exhaust	RA0230SQB-1 / RA0236SQB-1	C1-0505-0001
	8" Round Exhaust Plate	RA0242SQB-1 / RA0248SQB-1	C1-0606-0101
2	Duct Cover	RA02DC	12-56000-012-51
3	Hood Mounting Bracket		C1-0221-0092
4	Hood Casing	RA0230SQB-1	B101-5630-01
		RA0236SQB-1	B101-5636-01
		RA0242SQB-1	B101-5642-01
		RA0248SQB-1	B101-5648-01
5	LED Light		C1-0403-0306
6	Valve Stem		C1-0405-0404-B
7	Knob		C1-0405-0400-A
8	Oil Tunnel	RA0230SQB-1	B101-5630-14
		RA0236SQB-1	B101-5636-14
		RA0242SQB-1	B101-5642-14
		RA0248SQB-1	B101-5648-14
9	Motor Mounting Bracket	RA0230SQB-1 / RA0236SQB-1	C1-0105-2100-L
		RA0242SQB-1 / RA0248SQB-1	C1-0105-2142-L
10	Air Chamber & Motor	RA0230SQB-1 / RA0236SQB-1	C1-0302-A110-06
		RA0242SQB-1 / RA0248SQB-1	C1-0302-A120-01
11	Safety Screen	RA0230SQB-1 / RA0236SQB-1	C1-0302-A110-06-C
		RA0242SQB-1 / RA0248SQB-1	C1-0302-A120-01-C
12	Capacitor	RA0230SQB-1 / RA0236SQB-1	C1-0401-A250-22
		RA0242SQB-1 / RA0248SQB-1	C1-0401-A300-08
13	Light Transformer		C1-0402-D001
14	Capacitor Panel	RA0230SQB-1	C1-0201-5630
		RA0236SQB-1	C1-0201-5636
		RA0242SQB-1	C1-0201-5642
		RA0248SQB-1	C1-0201-5648
15	Baffle Filter		B101-1930-15
16	Spacer		
A	1" wide	RA0230SQB-1	B101-5630-09
B	4" wide	RA0236SQB-1	B101-5636-09
C	3/4" wide	RA0242SQB-1	B101-5642-09
D	3-3/4" wide	RA0248SQB-1	B101-5648-09


RA-02 Series

MODEL NO.: RA0230SQB-1 (30")
RA0236SQB-1 (36")

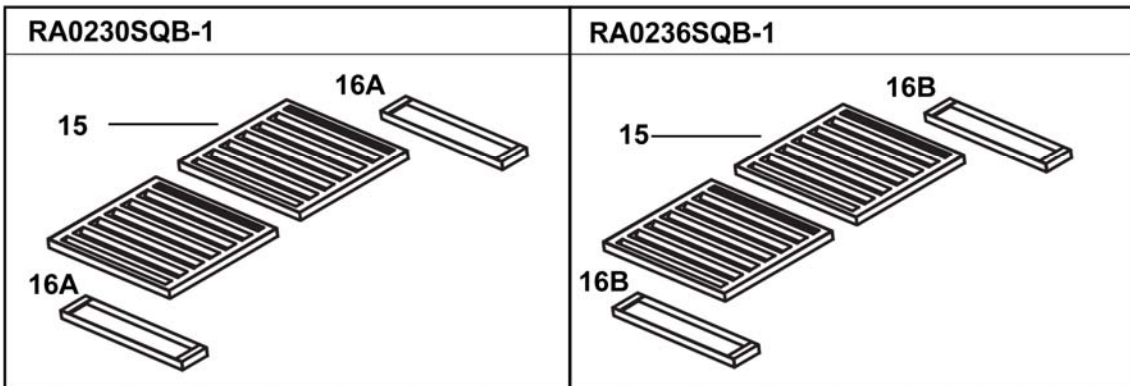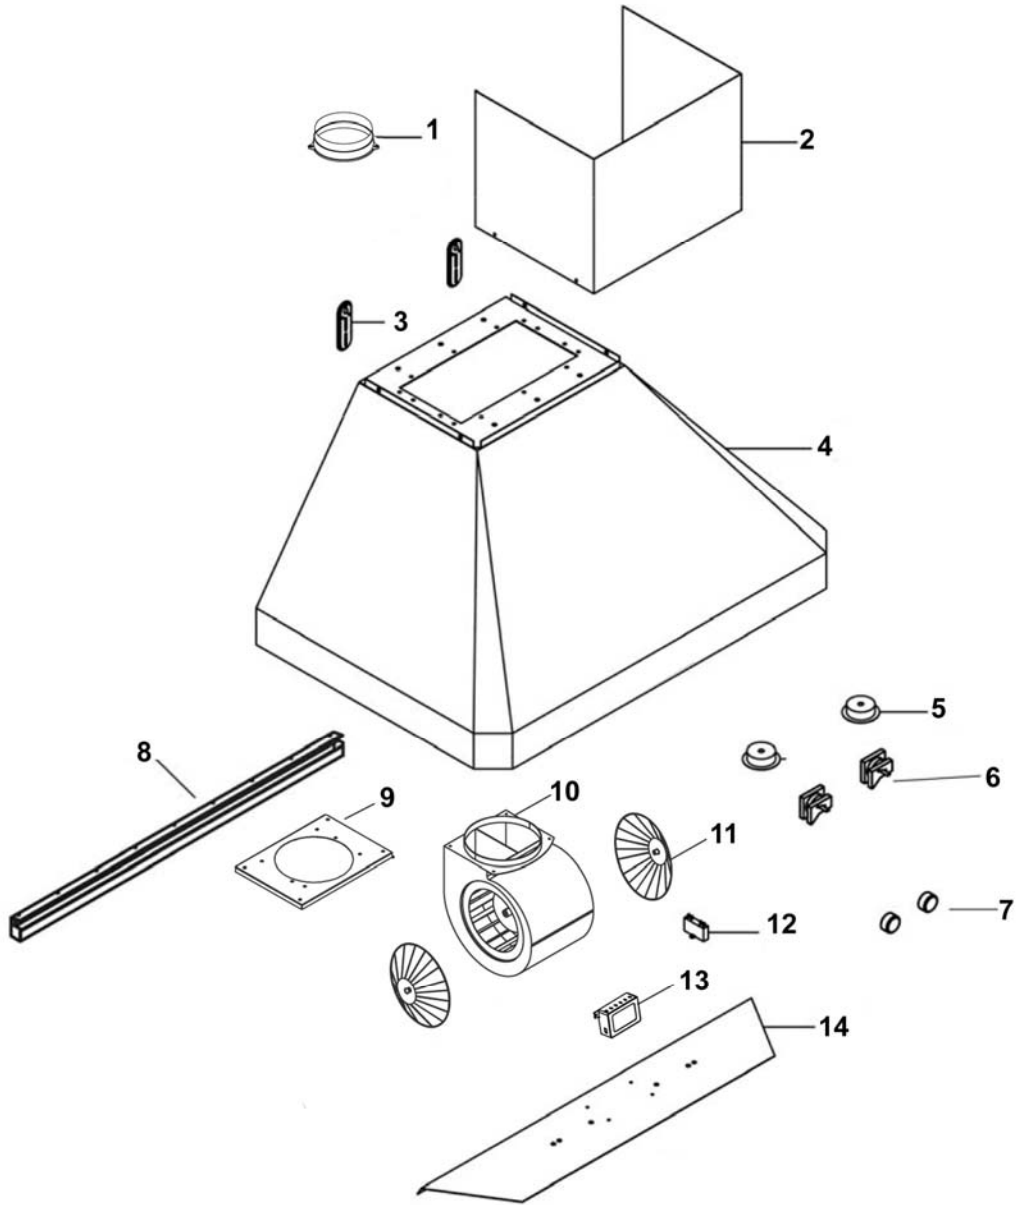

RA-02 Series

MODEL NO.: RA0242SQB-1 (42")
RA0248SQB-1 (48")

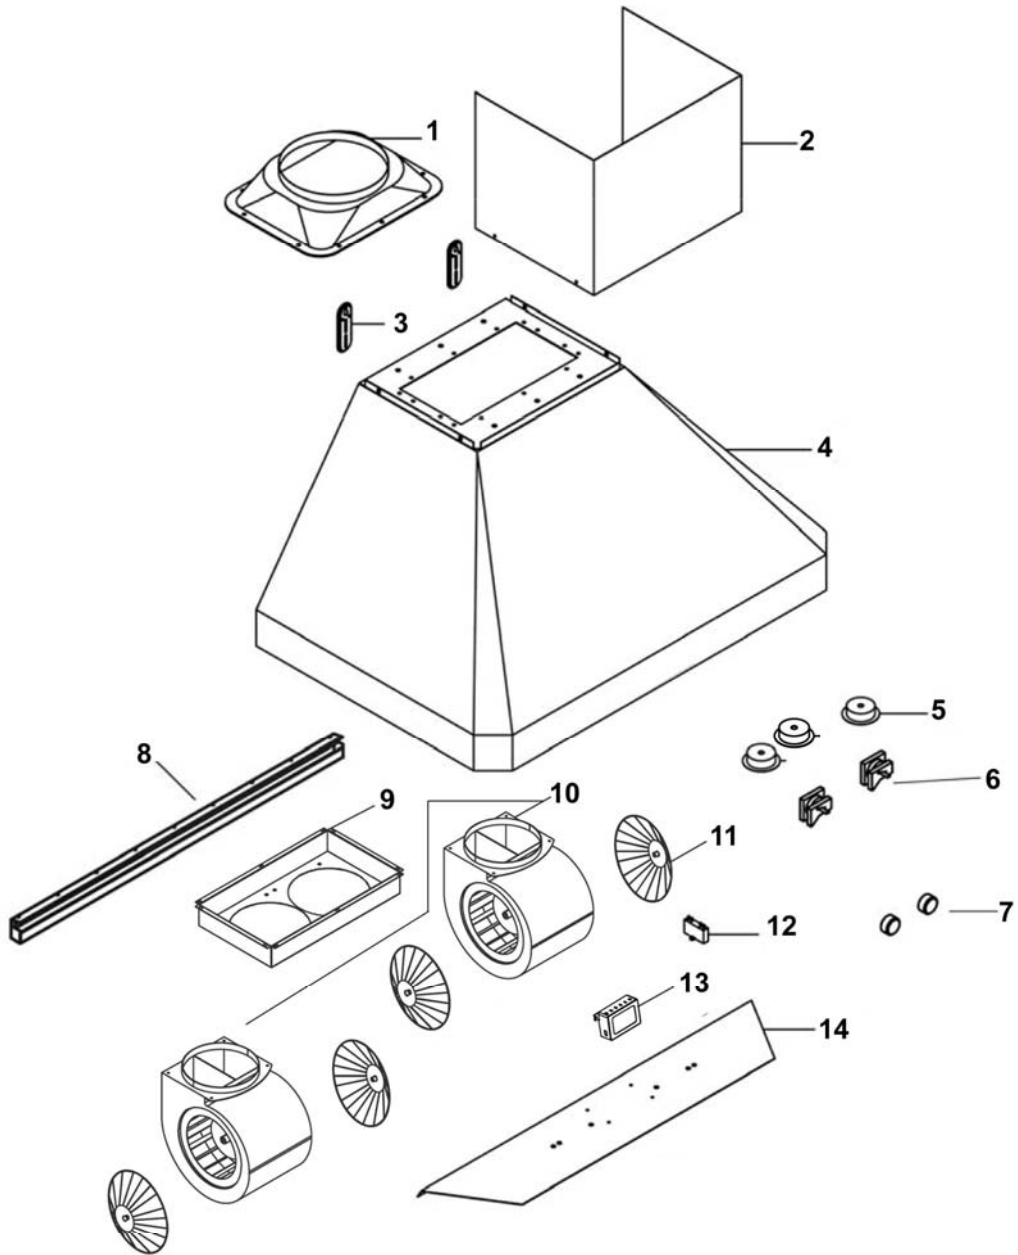


RA0242SQB-1	RA0248SQB-1
<p>Exploded view diagram of the RA0242SQB-1 filter assembly. It shows four filter panels (15) and two trim pieces (16C).</p>	<p>Exploded view diagram of the RA0248SQB-1 filter assembly. It shows four filter panels (15) and two trim pieces (16D).</p>

CIRCUIT DIAGRAM

CH-100 Series


MODEL NO.: CH0030SQB-1 (30")
CH0036SQB-1 (36")
CH0042SQB-1 (42")
CH0048SQB-1 (48")

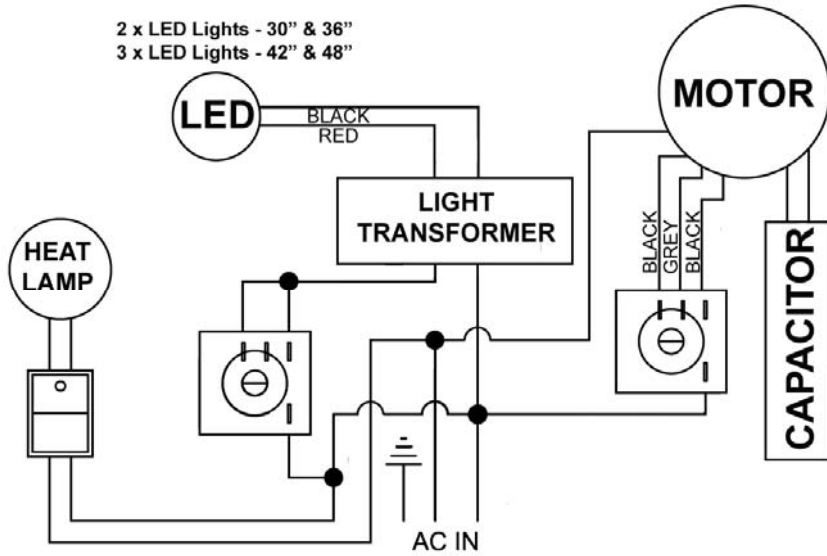

RA-02 Series

MODEL NO.: RA0230SQB-1 (30")
RA0236SQB-1 (36")
RA0242SQB-1 (42")
RA0248SQB-1 (48")

2 x LED Lights - 30" & 36"
3 x LED Lights - 42" & 48"

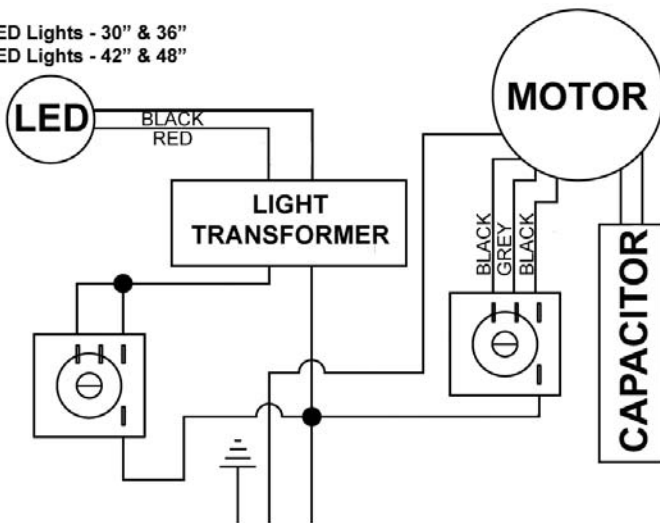

TROUBLE SHOOTING

Issue	Possible Cause	Solution
After Installation, both motors and lights are not working.	The power is not on.	Make sure the circuit breaker and the unit's power is ON. Use a voltage meter to check the power supply.
	The wire connection is not secure.	Check and tighten wire connection.
	The control panel is defective.	Replace the control panel.
Lights are working, but motor(s) is not.	The motor(s) is defective.	Replace the motor.
	The capacitor(s) is defective.	Replace capacitor(s).
	The control panel is defective.	Replace the control panel.
The range hood is vibrating.	The blower system is not secure.	Tighten the turbine impeller/squirrel cage and air chamber.
	The squirrel cage is not balanced.	Replace the squirrel cage.
	Hood is not secured in place.	Check the installation of hood, tighten the mounting bracket.
The motor is working, but the lights are not working.	LED Light(s) is defective.	Replace the LED light.
	The light wiring(s) is loose.	Check wire continuity from light transformer to LED light housing(s).
	Light transformer is defective.	Check power input and power output on the light transformer. If it's needed, replace the light transformer.
	The control panel is defective.	Replace the control panel.
The range hood is not venting out correctly.	The range hood is installed outside of the manufacture recommended clearance.	Adjust the clearance between the range hoods and cook top to 27" to 30". For Island range hood, the clearance between the range hoods and cook top is 30" to 36".
	There is no make-up air inside the house.	Open the window to enhance the performance of the range hood by creating a sufficient make-up air.
	Obstacle blocking the pipe work.	Remove all obstacles from the duct work.
	The pipe size is smaller than the suggested pipe size.	Change the ducting according to the manufacture suggestion.
Cold air is coming into the home.	The pipe connection is not properly sealed.	Check the pipe installation.
	The damper is not properly installed or is missing from the installation.	Check the damper installation.
	The damper is not installed.	By installing the damper, it will help to eliminate air backflow.

DISCLAIMER

1. **CAREFULLY INSPECT ALL ITEMS FOR DAMAGES BEFORE ACCEPTING DELIVERY. NOTE ANY DAMAGES ON THE FREIGHT BILL OR EXPRESS RECEIPT. REQUEST NAME AND SIGNATURE OF THE CARRIER'S AGENT AND KEEP COPY TO SUPPORT YOUR CLAIM.**

Upon acceptance of items, owner assumes responsibility for its safe arrival. Report damages to the carrier and file a claim immediately. Failure to do so may result in the denial of your claim. The carrier will furnish you with necessary forms for filing a claim.

DAMAGES CAUSED DURING TRANSIT ARE NOT COVERED UNDER OUR WARRANTY.

2. **PLEASE INSPECT CONTENTS OF PACKAGE(S) CAREFULLY UPON RECEIVING!**

We must be notified in writing of any damages and/or missing parts within the allocated days upon your receipt of package(s). Contact your local KOBE dealer or distributor or call KOBE for the time limit.

CLAIMS WILL NOT BE ACCEPTED AFTER THE ALLOCATED DAYS.

NOTE: ITEMS WERE THOROUGHLY TESTED AND CAREFULLY PACKED IN OUR FACTORY BEFORE SHIPPING.

3. Products must be returned in good working condition with ALL original parts and documentation packed in ALL original cartons, fillers and shipping cartons. A restocking fee of 25% will be charged for all approved return(s).

EXCHANGES OR RETURNS MAY NOT BE ACCEPTED IF ANY PACKAGING IS MISSING.

4. **MAKE SURE TO INSPECT THE HOOD FOR DAMAGES AND DEFECTS BEFORE INSTALLATION.** Appearance flaws of the hood found after installation and not affecting hood performance is not covered under our warranty for returns or exchanges. Service visits not covered under warranty will carry a service charge.

A) Before Installation: Return for exchange or refund (please see above for acceptable returns).

B) After Installation: **NO** exchange or refund.

WARRANTY

WARRANTY CERTIFICATE

KOBE Range Hoods warrants all products manufactured or supplied by it to be free from defects in workmanship and materials. Its obligations pursuant to this warranty are limited to a period of two years from the date of purchase and to the repair or replacement at its option and subject to the terms and conditions stated below, of any component part, which its examination shall disclose to be so defective.

TWO-YEAR WARRANTY SERVICE PERIOD

Any covered failure occurring within two years of original purchase arising from defective workmanship or material in manufacture will be repaired (or at our discretion, replaced) free of charge by an authorized KOBE Range Hoods Agent or KOBE Range Hoods as applicable. Keep proof of purchase (or original invoice) handy for inspection.

If the range hood is sold by the original purchaser during the warranty period the new owner is protected until expiration of the original purchaser's warranty.

CONDITIONS

The following conditions apply only in relation to the warranty expressly given in this certificate.

- 1) This warranty applies only:
 - a) within U.S.A. and Canada.
 - b) to range hoods used for PRIVATE SINGLE FAMILY USE (if used for COMMERCIAL or MULTIPLE FAMILY USE or other purposes, warranty will be voided).
- 2) Repair of any fault to be provided under this warranty shall not be provided:
 - a) if the identification number attached to the range hood has been altered, rendered illegible or removed;
 - b) if notice of the defect has not been given within the period applicable;
 - c) for failure of light bulbs or heat lamps;
 - d) for physical damage;
 - e) for surfaces damaged by use of improper chemical cleaning agents;
 - f) if the appliance has been:
 - i) subject to misuse, abuse, negligence, accident, incorrect installation or failure to follow the operating instructions;
 - ii) connected to improper, inadequate or faulty electricity service or exhaust ducts, flues or duct cover, or operated using incorrect or contaminated lubricants;
 - iii) installed, maintained or operated otherwise than in accordance with the instructions furnished by KOBE Range Hoods including the improper use of detergents, bleaches, or cleaners.
 - g) for damage to range hood during transit, delivery, installation or removal;
 - h) for damage by or resulting from attempted repairs conducted by anyone other than our Authorized Service Agent.
 - i) noise or vibration caused by improper installation of range hood and/or damper.

- 3) The purchaser shall be responsible for any expenses involved in making the range hood readily accessible for servicing and where the range hood is installed outside the main sales territory of the retailer or service territory of the nearest approved KOBE Range Hoods Agent as applicable, for any traveling expenses and any costs of transporting the range hood or parts thereof to and from the dealer or Service Agent
- 4) The purchaser must produce proof of purchase together with this warranty certificate when making the claim.
- 5) Damages caused during shipment are not covered under our warranty.

CONSEQUENTIAL DAMAGE

The warrantor is not responsible for any consequential damage. SOME STATES DO NOT ALLOW THE EXCLUSION OF CONSEQUENTIAL DAMAGE SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

IMPLIED WARRANTIES/STATE LAW

Any implied warranties, including the implied warranty of merchantability and fitness for purpose, imposed on the sale by the laws of the state of sale are limited to two year from the date of original purchase. Some states do not allow limitations on the duration of implied warranties. This warranty gives you specific legal rights, and may also have rights, which vary from state to state.

SERVICE

For service contact:

KOBE Range Hoods
11775 Clark Street
Arcadia, CA 91006
U.S.A.
Tel: (626) 775-8880
Email: customer.service@KOBERangeHoods.com
Website: www.KOBERangeHoods.com

PRODUCT REGISTRATION

Register Your Product!

Any covered failure occurring within two years of original purchase arising from defective workmanship or material in manufacture will be repaired or at our option the unit will be replaced free of charge by an authorized KOBE Range Hoods Agent or KOBE Range Hoods as applicable. Keep proof of purchase (original invoice) handy for inspection.

If the range hood is sold by the original purchaser during the warranty period the new owner is protected until expiration of the original purchaser's warranty. See warranty section for complete warranty coverage information.

This appliance has been manufactured, tested, and inspected to the standards required by KOBE Range Hoods.

PLEASE MAIL IN YOUR WARRANTY REGISTRATION CARD AND PROOF OF PURCHASE TO:

KOBE Range Hoods
11775 Clark Street
Arcadia, CA 91006
U.S.A.

RECORD THE FOLLOWING INFORMATION FOR YOUR RECORD:

Model No. _____

Serial No. _____

Purchased Date ____/____/____

Purchased From:

IMPORTANT: PLEASE KEEP A COPY OF YOUR SALE RECEIPT OR INVOICE HANDY WHEN REQUESTING FOR SERVICE.

KOBE[®]

KOBE Range Hoods
11775 Clark Street
Arcadia, CA 91006 USA

<http://www.KOBERangeHoods.com>

This KOBE hood is made for use in the USA and CANADA only. We do not recommend using this hood overseas as the power supply may not be compatible and may violate the electrical code of that country. **Using a KOBE hood overseas is at your own risk and will void your warranty.**

Information subject to change without notice.

VER.111109