# **KOHLER**<sub>®</sub>

## Revel<sup>™</sup> Frameless Pivot Shower Door K-707500-D3

### Features

- Vertical blade handles complete the look of this door.
- CleanCoat<sup>®</sup> technology creates a barrier between the water and glass to help keep your shower door looking new.
- Frameless, 1/4" (6 mm) thick Frosted tempered glass door.
- No top header eliminates clearance issues.
- Frameless design enphasizes glass and creates a sleek, minimalist look.
- Self-closing mechanism offers superior performance and security against water leakage.

#### Material


Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.
- •

### Components

Additional included component/s: Hardware Kit.



## **Codes/Standards**

ASTM C1036 ASTM C1048 ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

## KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.

Color Code Description	Color	Code	Description	
------------------------	-------	------	-------------	--




- ABZ Anodized Dark Bronze
- BNK Anodized Brushed Nickel



# **KOHLER**<sub>®</sub>

## Revel<sup>™</sup> Frameless Pivot Shower Door K-707500-D3

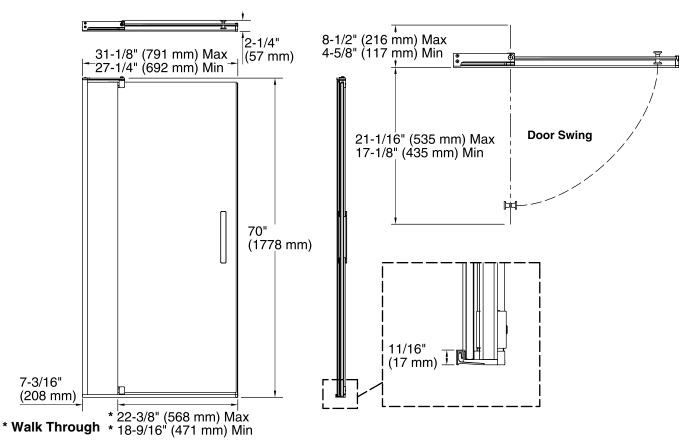

## **Technical Information**

Walk-through - Max:

Glass thickness:

All product dimensions are nominal.Installation type:For receptor installationOpening style:PivotOpening Width - Min:27-5/16" (693 mm)Opening Width - Max:31-1/8" (791 mm)Walk-through - Min:18-9/16" (471 mm)

22-3/8" (568 mm)

1/4" (6 mm)

#### Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.

