

### Features

- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Reversible top track offers a choice of curved or flat profile.

### Technology

- Frameless ¼" (13 mm) frosted tempered glass.
- Improved bypassing mechanism for smoother feel.
- Solid-metal contemporary towel bar design.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Sliding shower door.
- Not for use in hospitality.



### Codes/Standards

CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	SHP	Bright Polished Silver
	MX	Matte Nickel
	ABZ	Anodized Dark Bronze

### Available Glass Options

Code	Description
D3	Frosted

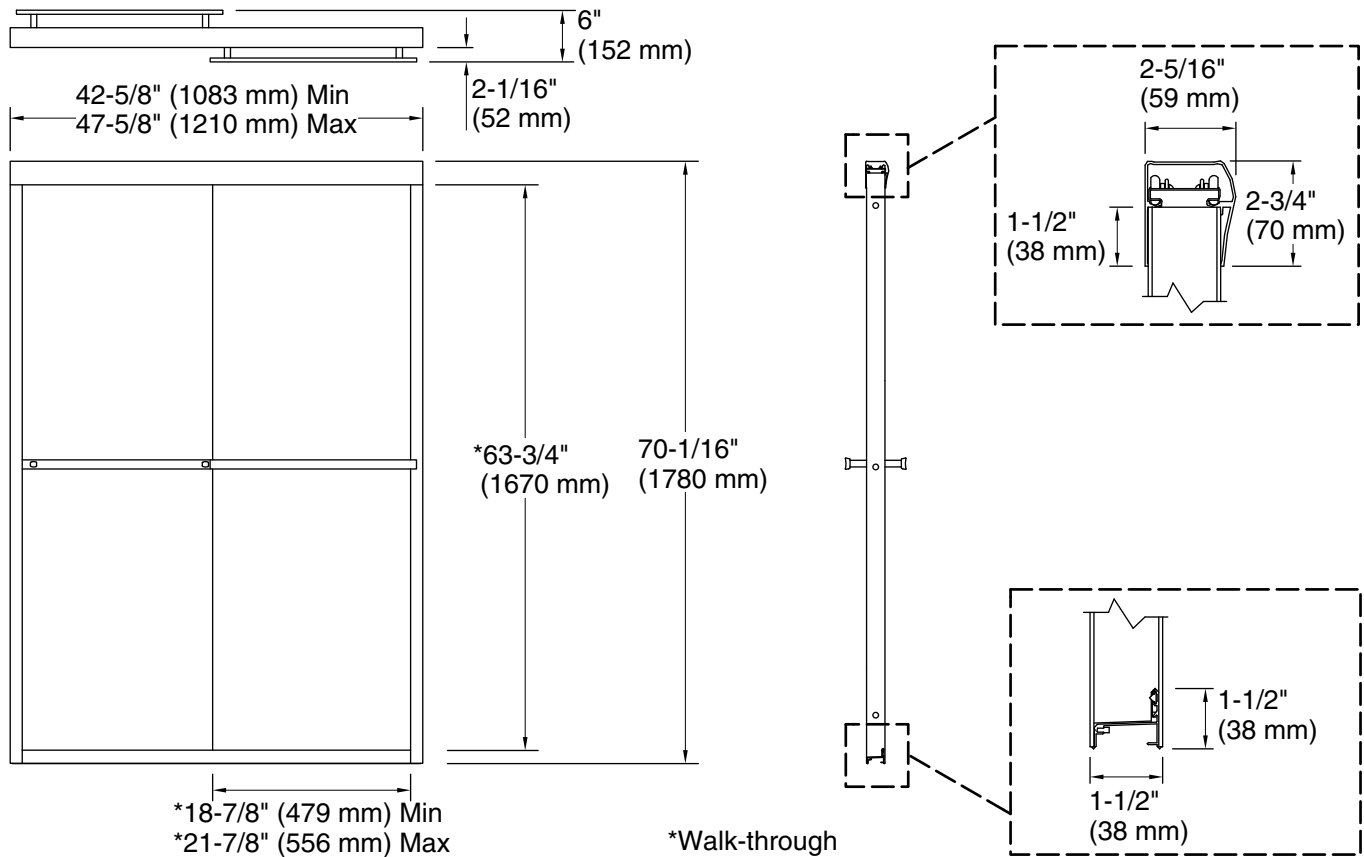

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 42-5/8" (1083 mm)

Opening Width - Max: 47-5/8" (1210 mm)

Walk-through - Min: 18-7/8" (479 mm)

Walk-through - Max: 21-7/8" (556 mm)

Base-To-Wall Radius - Max: 5/8" (16 mm)

Glass thickness: 1/4" (6 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 72" (1829 mm) to allow for installation clearance.