

# Sunstruck® Freestanding Bath K-24002

#### **Features**

- Freestanding design creates a striking focal point in your bathing area
- Integral lumbar support.
- Wide ledge on one side is ideal for deck-mount faucet and/or handshower.
- 16" soaking depth.
- Textured bottom surface.
- Center drain.
- 60" (1524 mm) x 34" (864 mm) x 25-1/4" (641 mm)

## Material

Acrylic

## Installation

- Freestanding
- PureFlo drains are not recommended for a deck-mount faucet installation

#### **Recommended Accessories**

K-7265 Clearflo Bath Drain

K-37383 30" Rough-in Cable Bath Drain

K-37386 30" Rough-in Cable Bath Drain

K-24916 Wireless Music Kit

K-T37391 Bath Cable Drain Trim

K-T37392 Bath Cable Drain Trim

K-T37393 Bath Cable Drain Trim

K-T37394 Bath Cable Drain Trim

K-T37395 Bath Cable Drain Trim

K-T37396 Bath Cable Drain Trim

K-T37397 Cable Bath Drain Trim



## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

## **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Descriptio
	0	White
	96	Biscuit






## **Sunstruck®**

# Freestanding Bath K-24002

8-7/16"

No change in measurements if connected with drain illustrated. (K-37385)

Faucet area

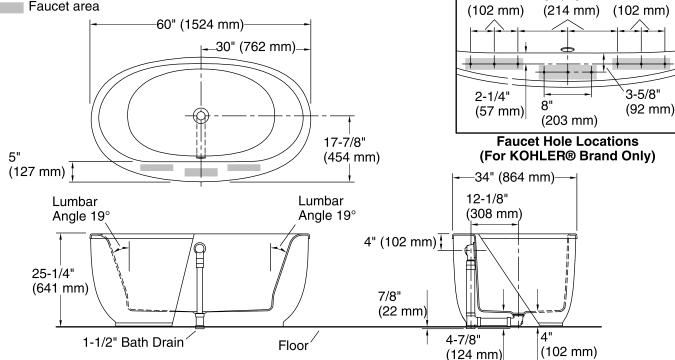

Note: Vertical and horizontal drain pipe and tee shown but may not be included.

## **Technical Information**

All product dimensions are nominal. Installation: Freestanding

Drain location: Center

Basin area, bottom: 39-5/8" x 23-5/8" (1006 mm x 599 mm)
Basin area, top: 49-9/16" x 25-1/2" (1259 mm x 648 mm)

Weight: 170 lbs (77.1 kg)

Minimum floor load: 49.8 lbs/ft<sup>2</sup> (243.1 kg/m<sup>2</sup>)

Water depth: 16" (406 mm)
Water capacity: 60 gal (227.1 L)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

