# **KOHLER**<sub>®</sub>

## Features

- 1/4" (6 mm) thick Crystal Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, quiet operation.
- Gently curved inside and outside towel bars complete the look of this door.

## Material

- Tempered glass ensures maximum safety and durability.
- Anodized aluminum hardware prevents rusting or corrosion.

## Technology

 CleanCoat<sup>®</sup> nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

## Installation


- Fits opening widths 54-5/8" 59-5/8" (1387 1514 mm).
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

# **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Included Components**

Additional Components: Hardware kit



ANSI Z97.1 CPSC 16CFR 1201

# KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
11	SHP	Bright Polished Silver
11	MX	Matte Nickel
11	ABV	Anodized Brushed Bronze

#### Available Glass Options Code Description

L Crystal Clear




# Fluence®

# Frameless sliding bath door K-702200-6L

# **Fluence**®

**KOHLER**<sub>®</sub>

Frameless sliding bath door K-702200-6L

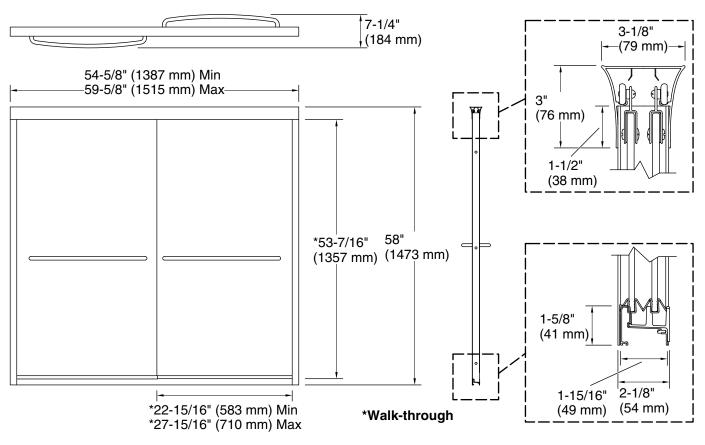

## **Technical Information**

All product dimensions are nominal.

Installation type:For bath installationOpening Width - Min:54-5/8" (1387 mm)Opening Width - Max:59-5/8" (1514 mm)Walk-through - Min:22-15/16" (583 mm)Walk-through - Max:27-15/16" (710 mm)Glass thickness:1/4" (6 mm)Glass coating:CleanCoat®

#### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 60" (1524 mm) to allow for installation clearance.

