

# Castia<sup>™</sup> by Studio McGee

Widespread bathroom sink faucet, 1.2 gpm K-35908-4

#### Features

- Designed in collaboration with Studio McGee
- Two lever handles offer separate control of hot and cold water
- 6" (152 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER<sup>®</sup> ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Metal touch-activated drain with 1-1/4" tailpiece
- Coordinates with other products in the Castia collection

#### Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

## Installation

- For 8" 16" (203 406 mm) centers
- Deck-mount
- Handles are preassembled on valves to simplify installation

## Adapters, Rough-in and Extension Kits

1280146

Range: 1-1/2" (38 mm) -1-1/2" (38 mm)

## **Recommended Products/Accessories**

K-23723 Faucet cleaner K-23726 Drain treatment K-35925 18" towel bar K-35926 24" towel bar K-35927 Double robe hook K-35928 Towel ring K-35929 Pivoting toilet paper holder







#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

#### **KOHLER®** Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**


СР	Polished Chrome
SN	Vibrant® Polished Nickel
2MB	Vibrant® Brushed Moderne Brass



## Castia™ by Studio McGee

KOHLER, Faucets

Widespread bathroom sink faucet, 1.2 gpm K-35908-4

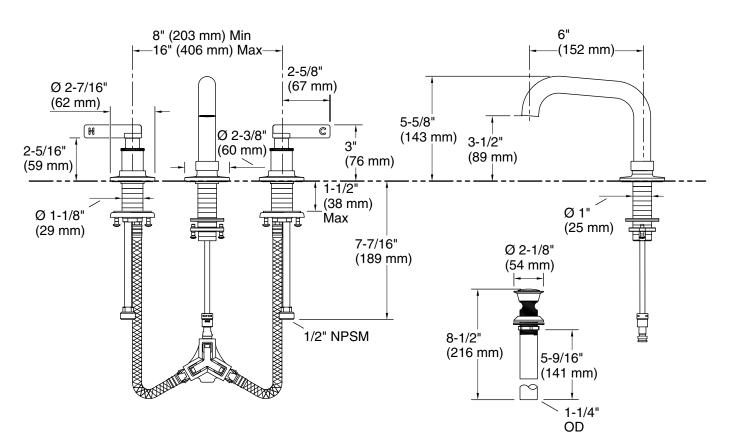

## **Technical Information**

All product dimensions are nominal.

#### Faucet:

Spout reach:

Flow rate:	1.2 gal/min (4.5 l/min)
riow rate.	<b>e</b> ( )
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Drain with overflow:	Yes
Spout:	

6" (152 mm)

#### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

