

#### Features

- 21" (533 mm) soaking depth.
- End drain.
- Overflows into horizontal overflow drain for maxiumum bathing depth.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Coordinates with other products in the Purist collection.
- 72" (1829 mm) x 46" (1168 mm) x 25-11/16" (652 mm)

### Material

Acrylic

### Hydrotherapy

- 122 BubbleMassage™ airjets. 18 levels of massage intensity.
- Zones of Control feature allows you to target massage to back, midsection, or feet.
- Built-in 300 W heater.
- Lighted keypad control.

### Installation

• Drop-in or under-mount.

#### **Required Accessories**

K-589 Under-mount Installation Kit K-7273 Bath Drain

## **Recommended Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-1705 Whirlpool/BubbleMassage™ Remote Control K-9498 3" Keypad Trim K-24916 Wireless Music Kit





## **Codes/Standards**

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold CARB P2

## KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.




# **Purist**®

6' BubbleMassage<sup>™</sup> Bath



# **Purist**®

6' BubbleMassage™ Bath

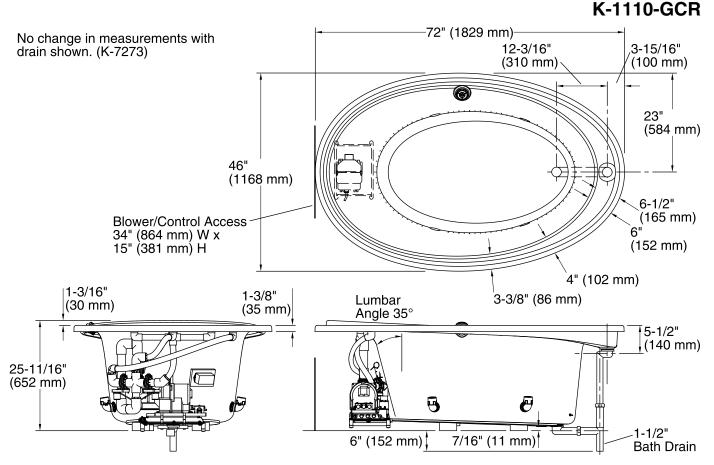

#### **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower: 220-240 V, 15 A, 50/60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	End
Basin area, bottom:	45" x 25-1/2" (1143 mm x 648 mm)
Basin area, top:	63" x 31-1/2" (1600 mm x 800 mm)
Weight:	134 lbs (60.8 kg)
Minimum floor load:	49 lbs/ft² (239.2 kg/m²)
Water depth:	21" (533 mm)
Water capacity:	115 gal (435.3 L)
Template:	Drop-in, 1016369-7, required, included
Electrical component	Blower: 220-240 V, 5 A, 50/60 Hz, 300 W
rating:	
Blower speed:	Variable

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

