

#### Features

- Integral flange.
- Right drain.
- Integral lumbar support and armrests for comfort.
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

#### Material

Acrylic

### Installation

Alcove

## **Recommended Accessories**

K-7166-AF Bath Drain K-11677 Bath Drain K-24916 Wireless Music Kit





# Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

#### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond




# Windward® 6' Bath




# Windward®

6' Bath K-1115-R

No change in measurements if connected with drain illustrated. (K-11677)



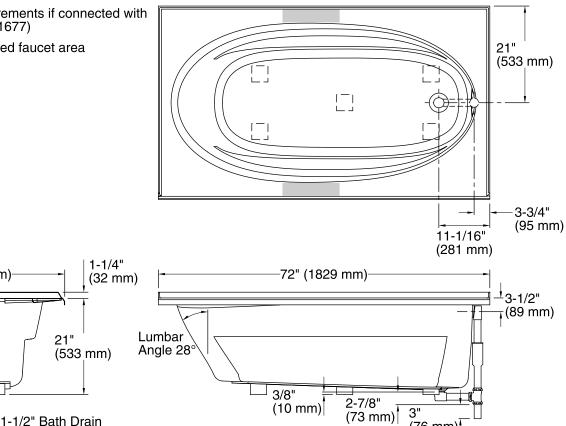

#### **Technical Information**

42" (1067 mm)

All product dimensions are nominal.			
Installation:	3-Wall Alcove		
Drain location:	Right		
Basin area, bottom:	55" x 23-1/4" (1397 mm x 591 mm)		
Basin area, top:	64" x 32" (1626 mm x 813 mm)		
Weight:	100 lbs (45.4 kg)		
Minimum floor load:	38 lbs/ft² (185.5 kg/m²)		
Water depth:	15" (381 mm)		
Water capacity:	78.5 gal (297.2 L)		
Minimum flat for door:	3-1/16" (78 mm)		

21"

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

(76 mm)

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

