


Features

- Acrylic
- Drop-in installation
- 139 gal (526.2 L) capacity
- 72" (182.9 cm) x 42" (106.7 cm) x 23" (58.4 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- CSA B45.0
- CSA B45.5
- CSA International

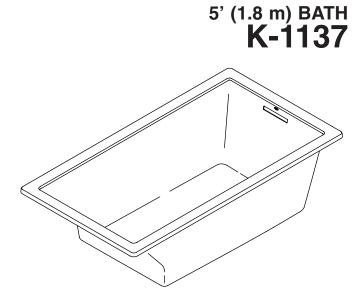

UNDERSCORETM

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/	Colors/Finishes		
K-1137	5' (1.8 m) bath – drop-in	0 🗆		□ Other	
Required Accessories K-7272 Clearflo slotted overflow bath drain □ CP □ PB □ Other					
Optional Accessories K-592 Undermount kit					

Product Specification

The acrylic bath shall be 72" (182.9 cm) in length, 42" (106.7 cm) in width, and 23" (58.4 cm) in height. Bath shall be for drop-in installation. Bath shall have a 139 gal (526.2 L) capacity. Bath shall be Kohler Model K-1137-____.

UNDERSCORE_{TM}

Technical Information


Fixture*:				
Bathing well:				
Basin area, bottom	45-3/4" (116.2 cm) x 32" (81.3 cm)			
Basin area, top	66" (167.6 cm) x 36" (91.4 cm)			
Weight	85 lbs (38.6 kg)			
To overflow:				
Water depth	19″ (48.3 cm)			
Capacity	139 gal (526.2 L)			
* Approximate measurements for comparison only.				
Drop-in cutout	70-1/2" (179.1 cm) x 40-1/2" (102.9 cm)			

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 60 lbs/square foot (291 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

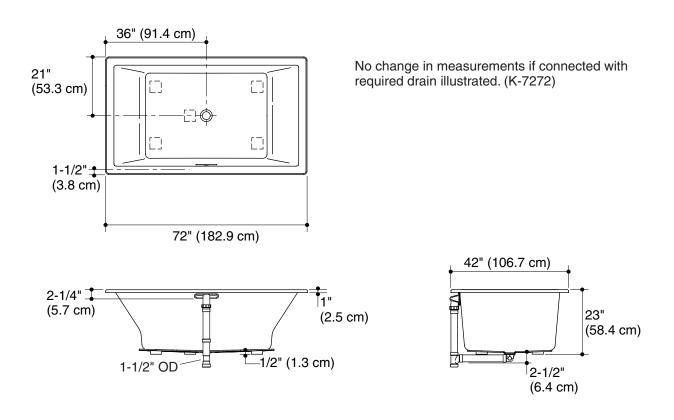

Product Diagram

