

# Features

- Premium material construction.
- 1/2" NPT connection.
- Traditional lever handle.



Codes/Standards ASME A112.18.1/CSA B125.1

KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty See website for detailed warranty information.

# **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description	
and the second se			

CF
G

CP Polished Chrome


G Brushed Chrome

BN Vibrant® Brushed Nickel

USA/Canada: 1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 3-7-2017 04:25



# KOHLER. Faucets

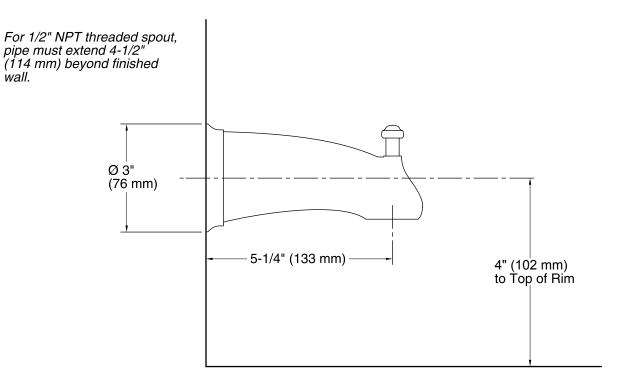

# **Technical Information**

All product dimensions are nominal.

### Spout:

Spout reach:

5-1/4" (133 mm)

### Notes

Install this product according to the installation guide.

Cap the shower outlet if the deck-mounted spout, diverter, or handshower is connected to the spout outlet.

If installing a K-304 valve, install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

