



**Purist®**  
6' Effervescence Bath  
**K-1110-CT**



### Features

- 21" (533 mm) soaking depth.
- End drain.
- Overflows into horizontal overflow drain for maximum bathing depth.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Coordinates with other products in the Purist collection.
- 72" (1829 mm) x 46" (1168 mm) x 25-11/16" (652 mm)

### Material

- Acrylic

### Hydrotherapy

- Variable-speed pump for adjusting hydromassage intensity.
- Effervescent bubbles with eight ports.
- Built-in 1500 W heater.
- Lighted keypad control.
- Remote control.

### Installation

- Drop-in or under-mount.

### Required Accessories

K-589 Under-mount Installation Kit  
K-7273 Bath Drain

### Recommended Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-9696 Whirlpool 6-Jet Trim Kit  
K-24916 Wireless Music Kit




### Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
CARB P2

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

No change in measurements if connected with drain illustrated (K-7273)

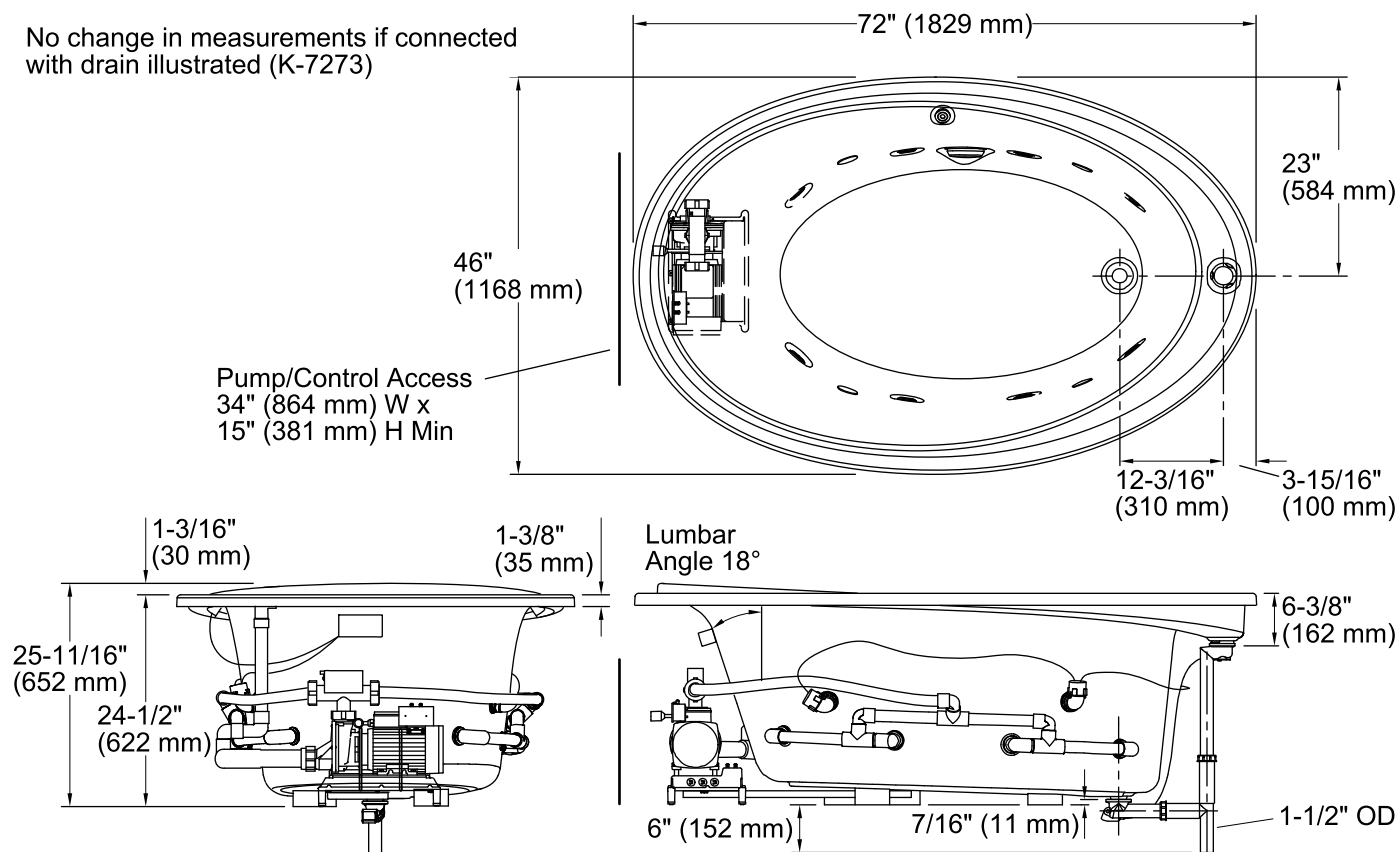

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 220-240 V, 20 A, 50/60 Hz

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	End
Basin area, bottom:	46-1/4" x 27-1/2" (1175 mm x 699 mm)
Basin area, top:	53" x 33" (1346 mm x 838 mm)
Weight:	160 lbs (72.6 kg)
Minimum floor load:	50 lbs/ft² (244.1 kg/m²)
Water depth:	21" (533 mm)
Water capacity:	115 gal (435.3 L)
Template:	Drop-in, 1016369-7, required, included
Electrical component rating:	Pump: 240 V, 11 A, 50/60 Hz Heater: 240 V, 6.25 A, 1500 W
Pump speed:	Variable

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.