

Features

- Integral flange.
- Comfort Depth® design offers a 19" (483 mm) step-over height.
- Left drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm) •

Material

Acrylic

Installation

Alcove

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-24916 Wireless Music Kit





Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	lce™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey

- Grey
- 7 Black Black[™]



USA/Canada: 1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com. 3-7-2017 04:38

Underscore®

5' Bath K-1121-L


GREENGUARI





Underscore®

5' Bath K-1121-L

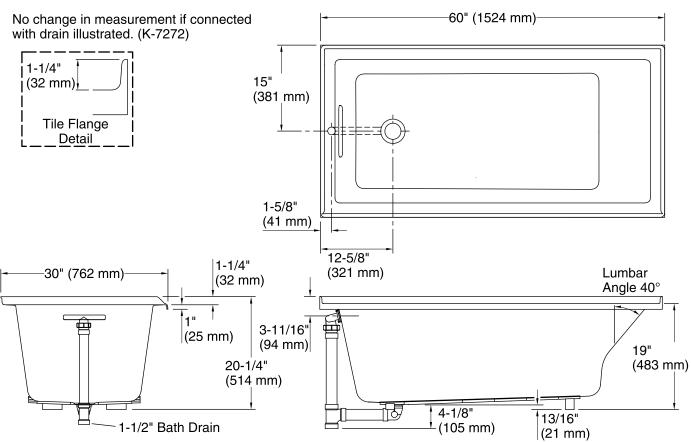

Technical Information

All product dimensions are nominal.			
Installation:	3-Wall Alcove		
Drain location:	Left		
Basin area, bottom:	42-7/16" x 20" (1078 mm x 508 mm)		
Basin area, top:	54-5/16" x 24-1/4" (1380 mm x 616 mm)		
Weight:	75 lbs (34 kg)		
Minimum floor load:	42 lbs/ft² (205.1 kg/m²)		
Water depth:	15-1/8" (384 mm)		
Water capacity:	59.8 gal (226.4 L)		
Minimum flat for door:	1-15/16" (50 mm)		

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

