

Windward®

6' Bath **K-1115-L**



Features

- Integral flange.
- Left drain.
- Integral lumbar support and armrests for comfort.
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

Material

Acrylic

Installation

Alcove

Recommended Accessories

K-7166-AF Bath Drain K-11677 Bath Drain K-24916 Wireless Music Kit



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





(533 mm)


3-3/4"


Windward®


6' Bath **K-1115-L**

No change in measurements if connected with drain illustrated. (K-11677)

Recommended faucet area



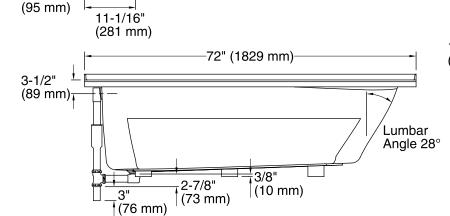



Technical Information

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Left

Basin area, bottom: 55" x 23-1/4" (1397 mm x 591 mm)
Basin area, top: 64" x 32" (1626 mm x 813 mm)

Weight: 100 lbs (45.4 kg)
Minimum floor load: 38 lbs/ft² (185.5 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 78.5 gal (297.2 L)
Minimum flat for door: 3-1/16" (78 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

