


### Features

- Acrylic
- 8 color-matched jets
- 1.25 hp pump with air switch and grounding-type plug-in cord
- Integral lumbar support
- Slotted overflow for maximum bathing depth
- Low threshold height
- Armrests
- 60" (152.4 cm) x 32" (81.3 cm) x 19" (48.3 cm)

### 5' (1.5 m) BATH WHIRLPOOL K-1122

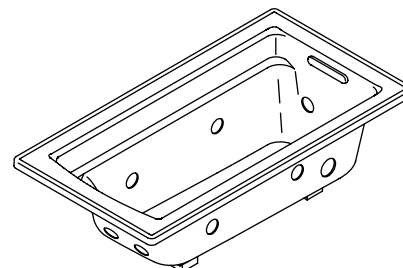

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)
- ASME A112.19.7M

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1122	5' (1.5 m) drop-in bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Required Accessories</b>			
K-7272	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification:

The bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 19" (48.3 cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall have 8 color-matched jets, and 1.25 hp pump. Bath whirlpool pump shall be supplied with a grounding-type plug-in cord. Bath whirlpool shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath shall have armrests. Bath whirlpool shall be Kohler Model K-1122-\_\_\_\_\_.

# ARCHER™

## Technical Information

Fixture*:	basin area	top area	weight
Bathing well	45-1/8" (114.6 cm) x 19-11/16" (50 cm)	52-3/4" (134 cm) x 25-5/16" (64.3 cm)	110 lbs (50 kg)
To overflow	water depth 15" (38.1 cm)	capacity 58 gal (219.5 L)	

\* Approximate measurements for comparison only.

Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7
Pump is supplied with 24" (61 cm) grounding-type plug-in cord.				
Minimum access panel pump/control:				
20" (50.8 cm) W x 15" (38.1 cm) H	required			

## Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

## Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 59 lbs/square foot (288 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

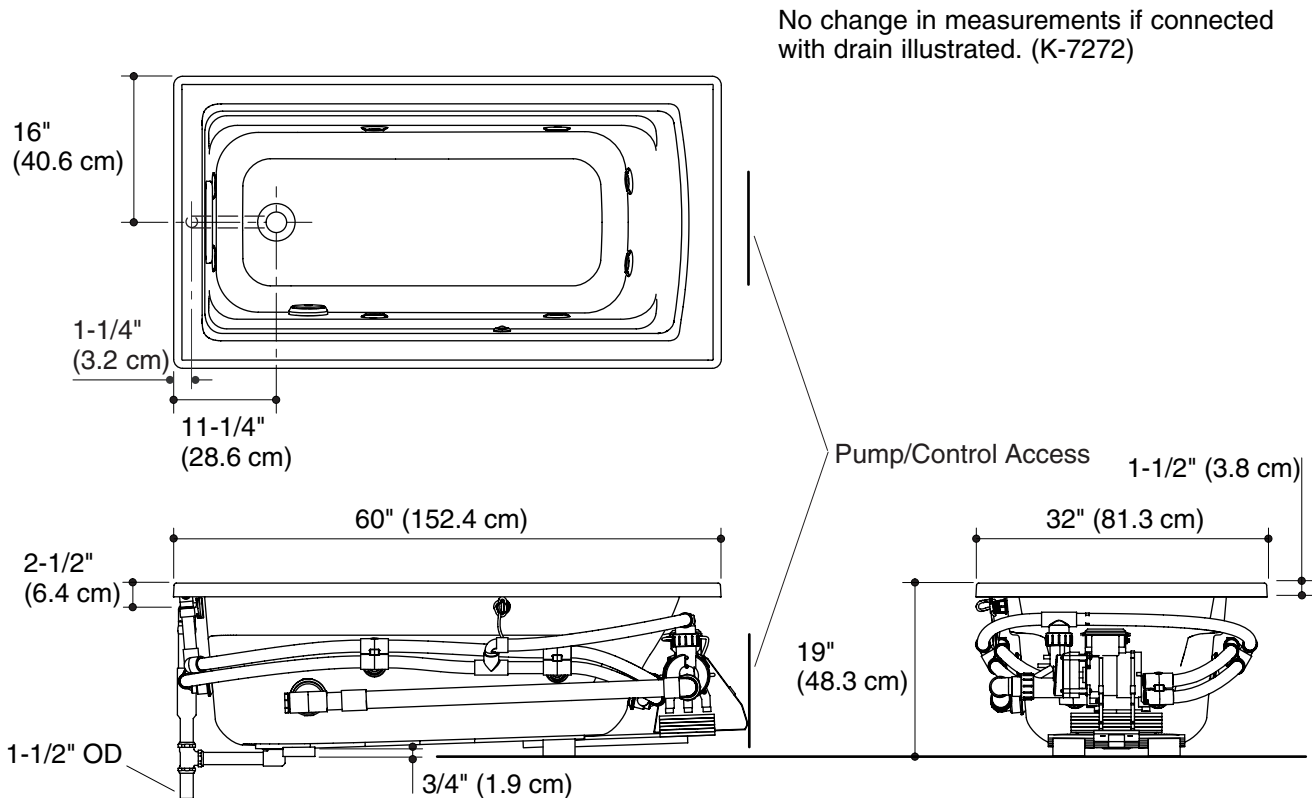

## Product Diagram

ARCHER™ 5' (1.5 m) BATH WHIRLPOOL

Page 2 of 2  
1071356-4-A

THE BOLD LOOK  
OF KOHLER®