

## **UNDERSCORETM**

5.5' (1.7 m) BATH **K-1136** 


#### **Features**

- Acrylic
- Drop-in installation
- Molded lumbar support
- 102 gallon (386 L) capacity
- 66" (167.6 cm) x 36" (91.4 cm) x 22" (55.9 cm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- CSA B45.0
- CSA B45.5
- CSA International

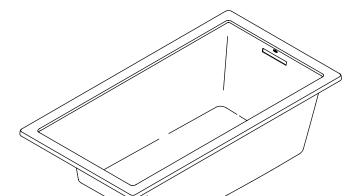

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories**

- CP: Polished Chrome
- PB: Vibrant<sub>®</sub> Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

## **Specified Model**

□ Other
□ Other

## **Product Specification**

The acrylic bath shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 22" (55.9 cm) in height. Bath shall be for drop-in installation. Bath shall have a 102 gallon (386 L) capacity. Bath shall have a molded lumbar support. Bath shall be Kohler Model K-1136-\_\_\_\_.

# **UNDERSCORETM**

## **Technical Information**


Fixture*:	
Bathing well:	
Basin area, bottom	44-1/2" (113 cm) x 26-1/2" (67.3 cm)
Basin area, top	60-1/4" (153 cm) x 30-1/4" (76.8 cm)
Weight	80 lbs (36.3 kg)
To overflow:	
Water depth	17-3/4" (45.1 cm)
Capacity	102 gal (386 L)
* Approximate measurements for comparison only.	
Drop-in cutout 6	65" (165.1 cm) x 35" (88.9 cm)

### **Installation Notes**


Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 58 lbs/square foot (283 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



No change in measurements if connected with required drain illustrated. (K-7272)

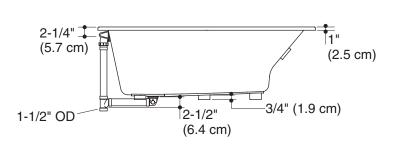



**Product Diagram** 

