

KOHLER®

Roughing-In

K-1157-HN PROFLEX® 7236 CUSTOM BATH WHIRLPOOL WITH HEATER

Product Information

Applicable product:				
Custom bath whirlpool with heater – drop-in			K-1157-HN	
Fixture*:				
Basin area:				
Bathing well		55" (139.7 cm) x 21" (53.3 cm)		
Top area		65" (165.1 cm) x 26" (66 cm)		
Weight		71 lbs (32.2 kg)		
To overflow:				
Water depth		15" (38.1 cm)		
Capacity		72 gal (272.5 L)		
* Approximate measurements for comparison only.				
Drop-in cut-out		70-1/2" (179.1 cm) x 34-1/2" (87.6 cm)		
Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:		kW	V	Hz
		1.5	120	60
				12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provided adequate clearance.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

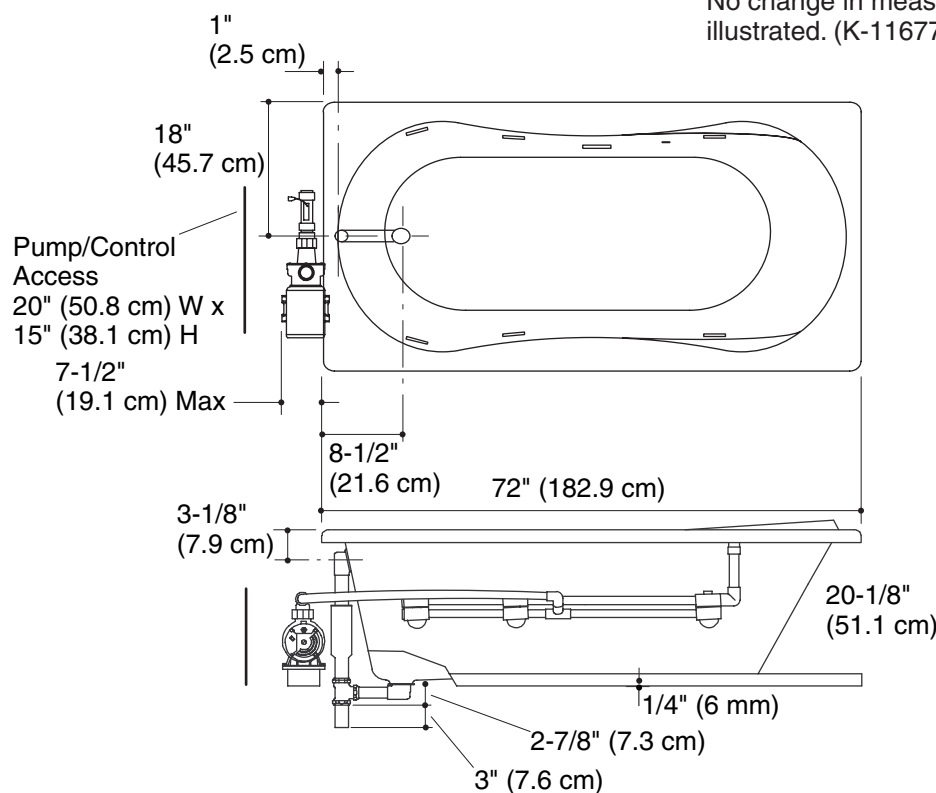

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

