



## Features

- Center drain.
- Cascading water over rim.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Adjustable bath leveling system.
- Two raised molded seats.
- Dual lumbar supports two-person bathing by offering comfort at both ends.
- 103-3/4" (2635 mm) x 41" (1041 mm) x 26" (660 mm)

## Material

- Acrylic bath, with gel coat FRP overflow channel.

## Hydrotherapy

- Effervescent bubbles with 13 ports.
- Built-in 4000 W heater.

## Installation

- Drop-in

## Recommended Accessories

K-1601 Bath/Whirlpool Footstop  
K-7223 Pop-up Bath Drain  
K-922 Bath Filler  
K-923 Bath Filler  
K-18486-4 Roman Bath Filler



## Codes/Standards



ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
CARB P2

## KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit

No change in measurements if connected with drain illustrated. (K-7223)

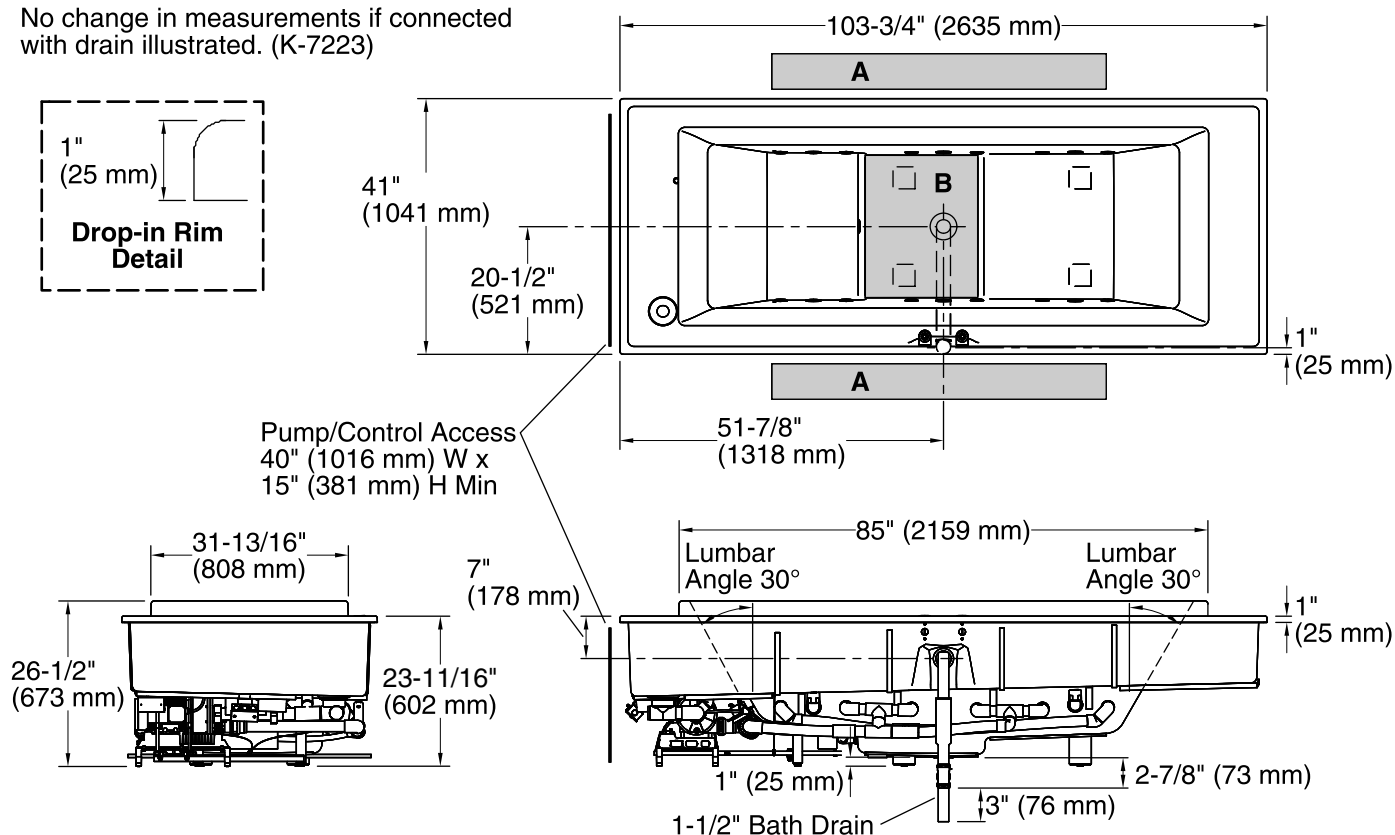

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz  
Heater: 240 V, 20 A, 50/60 Hz

## Technical Information

All product dimensions are nominal.

Installation: Drop-in  
Drain location: Center  
Basin area, bottom: 60" x 25-1/2" (1524 mm x 648 mm)  
Basin area, top: 84" x 31-1/2" (2134 mm x 800 mm)  
Weight: 375 lbs (170.1 kg)  
Minimum floor load: 66 lbs/ft² (322.2 kg/m²)  
Water depth: 24-5/8" (625 mm)  
Water capacity: 185 gal (700.3 L)  
Cutout: Drop-in, 102-1/4" x 40" (2597 mm x 1016 mm)  
Electrical component rating: Pump: 240 V, 4 A, 50/60 Hz  
Heater: 240 V, 15 A, 50/60 Hz, 4000 W  
Pump speed: Variable

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Recommended spouts for area A: K-T954-4, K-T6906, K-18486-4, K-922 and K-924, or K-923 and K-924.

Recommended spouts for area B: K-922 or K-923.

Unit must be filled through the bathing well.

Consult local and national codes for minimum air gap requirements when installing a spout on the faucet deck.