


Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- Center drain
- 72" (1829 mm) x 36" (914 mm) x 23" (584 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662

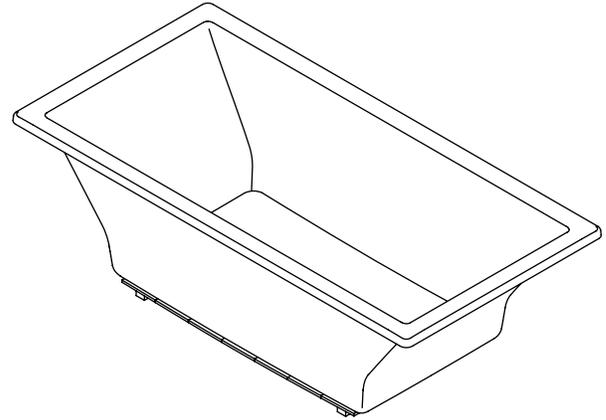

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1834	Drop-in bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-593	Undermount kit		<input type="checkbox"/> NA	
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____

Product Specification

The acrylic bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 23" (584 mm) in height. Bath shall be for drop-in installation. Bath shall have molded lumbar support and center drain. Bath shall be Kohler Model K-1834-_____.

UNDERScore®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45-3/4" (1162 mm) x 25-15/16" (659 mm)
Basin area, top	65-3/8" (1661 mm) x 29-5/16" (745 mm)
Weight	82 lbs (37.2 kg)
To overflow:	
Water depth	19-7/16" (494 mm)
Capacity	112.9 gal (427 L)
* Approximate measurements for comparison only.	
Drop-in cut-out	71-1/2" (1816 mm) x 35-1/2" (902 mm)




Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 58 lbs/square foot (285 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurement if connected with drain illustrated. (K-7272)

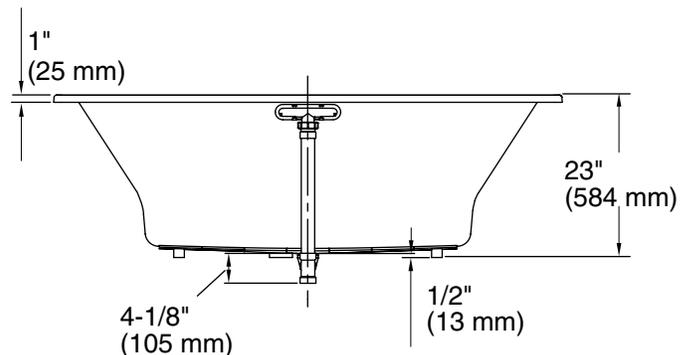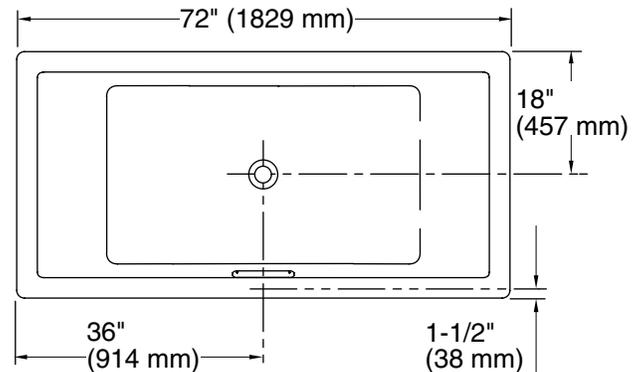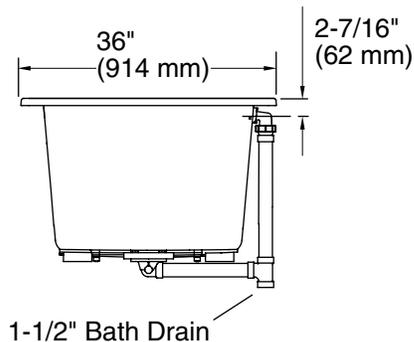

Product Diagram