



# Portrait® 5.5' BubbleMassage™ Bath K-1457-GCR



## Features

- Center drain.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Integral lumbar support.
- Coordinates with other products in the Portrait® collection.
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

## Material

- Acrylic

## Hydrotherapy

- 122 BubbleMassage™ airjets. 18 levels of massage intensity.
- Zones of Control feature allows you to target massage to back, midsection, or feet.
- Automatic purge cycles remove residual water from air channels after use.
- Built-in 300 W heater.
- Lighted keypad control.

## Installation

- Drop-in

## Recommended Accessories

K-1705 Whirlpool/BubbleMassage™ Remote Control  
K-7161-AF Bath Drain  
K-9498 3" Keypad Trim  
K-24916 Wireless Music Kit




## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
CARB P2

## KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

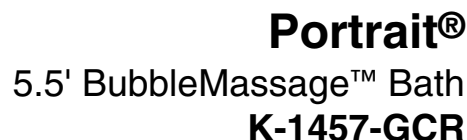

 Recommended faucet area.

Technical drawing of the rear view of the 1000 Series. The drawing shows a rectangular unit with rounded corners and a central mounting bracket. Dimensions are provided in inches and millimeters:

- Overall width: 67" (1702 mm)
- Overall height: 13-1/2" (343 mm)
- Mounting bracket height: 1-1/2" (38 mm)
- Distance from left edge to mounting bracket: 33-1/2" (851 mm)
- Distance from mounting bracket to right edge: 6-1/2" (165 mm)

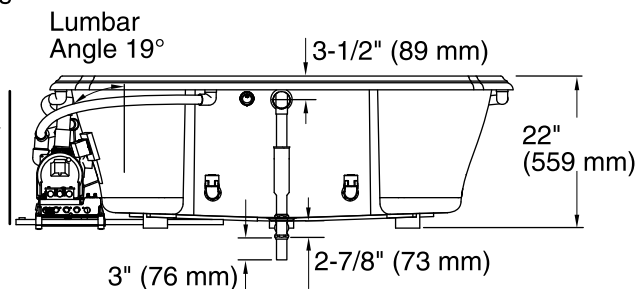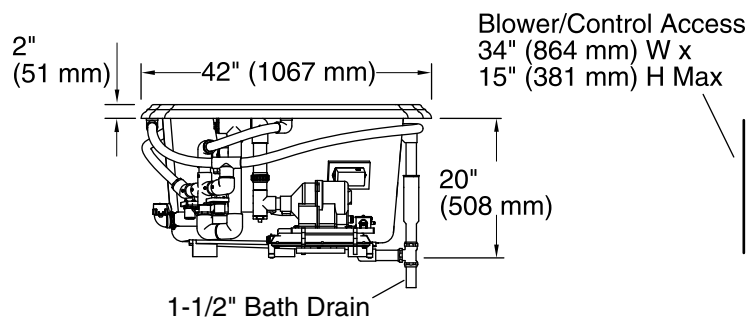

## Blower: 240 V, 15 A, 50/60 Hz

All product dimensions are nominal.

|                              |   |
|------------------------------|---|
| Installation:                | Drop-in   |
| Drain location:              | Center  |
| Basin area, bottom:          | 50" x 29" (1270 mm x 737 mm)                    |
| Basin area, top:             | 61" x 32" (1549 mm x 813 mm)                    |
| Weight:                      | 128 lbs (58.1 kg)                               |
| Minimum floor load:          | 51 lbs/ft <sup>2</sup> (249 kg/m <sup>2</sup> ) |
| Water depth:                 | 16" (406 mm)                                    |
| Water capacity:              | 100 gal (378.5 L)                               |
| Template:                    | Drop-in, 113311-7, required, included           |
| Electrical component rating: | Blower: 240 V, 5 A, 50/60 Hz, 300 W             |
| Blower speed:                | Variable  |

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

If relocating the blower motor, do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly. Provide access for servicing the blower.