



Sonata®

60" x 90" Bath and Shower Stall

K-1682



Features

- Right drain.
- Integral high-dome ceiling.
- Integral ledge.
- Grab bar and shelf.
- Integral lumbar support.
- Compliments traditional and contemporary bathroom designs.
- 60" (1524 mm) x 34-13/16" (884 mm) x 90" (2286 mm)

Material

- Acrylic

Installation

- Alcove

Required Accessories

K-9459 Grab Bar and Shelf Accessory Kit

Recommended Accessories

1647-PC
K-1665 Shower Light
1708
K-7166-AF Bath Drain
K-9529 Removable Bath Seat



Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold




KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |

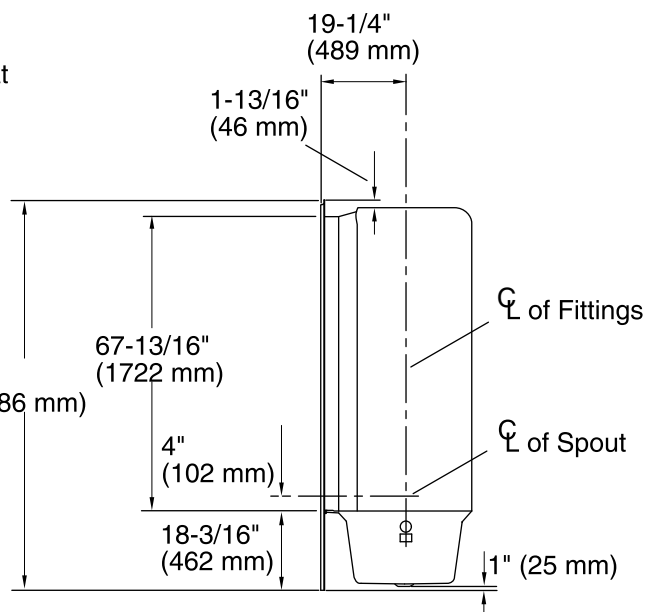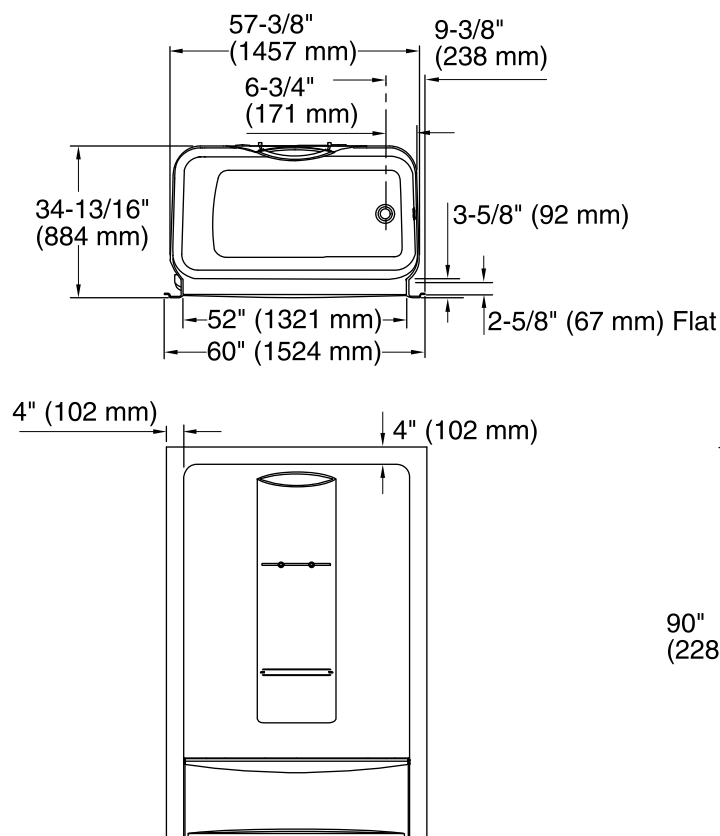

Technical Information

All product dimensions are nominal.

| | |
|------------------------|---|
| Installation: | 3-Wall Alcove |
| Drain location: | Right |
| Basin area, bottom: | 46" x 23" (1168 mm x 584 mm) |
| Basin area, top: | 54" x 27" (1372 mm x 686 mm) |
| Weight: | 200 lbs (90.7 kg) |
| Minimum floor load: | 94 lbs/ft ² (458.9 kg/m ²) |
| Water depth: | 11-7/8" (302 mm) |
| Water capacity: | 55 gal (208.2 L) |
| Minimum flat for door: | 2-1/2" (64 mm) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

KOHLER steam generator/control kit are designed for use with this product. Kohler Co. shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.