

KOHLER®

Roughing-In

K-3341, K-14302 UNDERTONE®/LYRIC™ TOP-MOUNT/UNDER-MOUNT KITCHEN SINK

Product Information

Applicable product:	
Top-mount/under-mount – kitchen sink	K-3341
Top-mount/under-mount – bar sink	K-14302
Fixture*:	
Bowl area	Ø 15" (381 mm)
Water depth	7-1/2" (191 mm)
Drain hole	Ø 3-5/8" (92 mm)
*Approximate measurements for comparison only.	
Included components:	
Lug pack (top-mount)	7257
Clamp accessory pack (under-mount)	52047
Cut-out template	113392-7

Installation Notes



Install this product according to the installation guide.

Supplied bowl clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl under-mount installations, a minimum distance of 3-1/2" (89 mm) is required between bowls. Countertop supplier to determine required support.


Waterproof unprotected overhang area of the underside of wood counter.

Fixture conforms to ASME Standard A112.19.3/CSA B45.4. All dimensions are nominal.

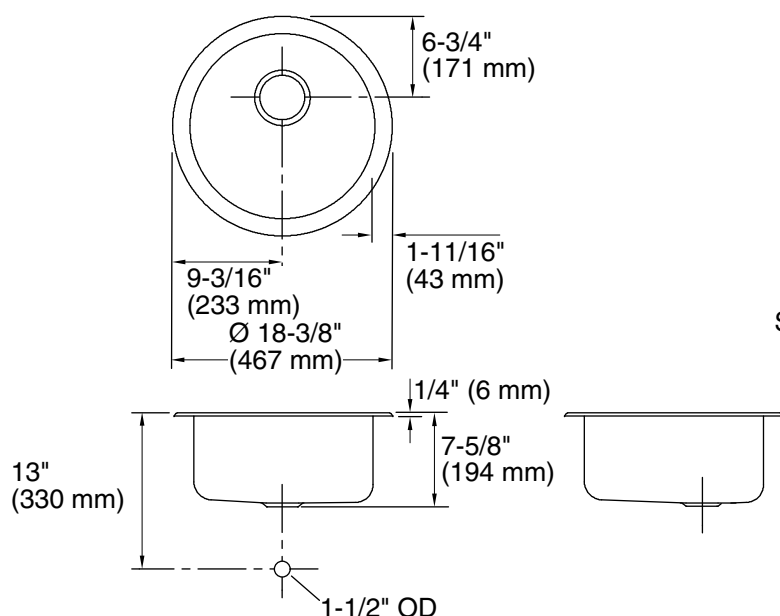

**Top-Mount
Installation**

Kit #7257

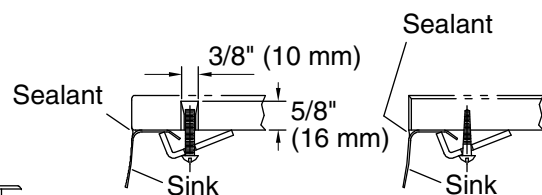

**Marble-slab
Installation**

**Wood Counter
Installation**

Kit #52047